


YORK ABRASIVES Cartridge Rolls

Spirally wound aluminium oxide cloth rolls that wear in use constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications. Available in two types. A steel mandrel must be used to secure the abrasive to the tool.

Maximum Running Speeds:
 Up to 12mm dia. 22,000rpm.
 Up to 19mm dia. 18,000rpm.
 Up to 25mm dia. 10,000rpm.



Straight Type

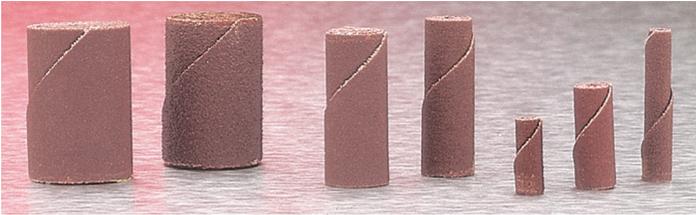

Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205	Price/1 THB
3 x 19	CR1	P80	100g	-7010K	30.00
		P120		-7020K	30.00
6 x 19	CR3	P80	150g	-7050K	30.00
6 x 25	CR4	P80	200g	-7070K	30.00
		P120		-7080K	30.00
6 x 38	CR4	P80	200g	-7250K	31.00
		P120		-7260K	34.00
9.5 x 25	CR5	P80	265g	-7090K	30.00
9.5 x 38	CR6	P80	400g	-7110K	30.00
		P120		-7120K	35.00
12 x 38	CR8	P60	670g	-7150K	35.00
		P80		-7155K	38.00
19 x 38	CR10	P120	1500g	-7160K	38.00
		P60		-7190K	59.00
		P120		-7200K	62.00

Mandrels



For use with Cartridge Rolls. This steel adaptor is used to secure and hold both tapered and parallel sided cartridge rolls to air grinders or electric drills. This holder is used by sliding the cartridge roll onto the mandrel pilot until the bottom of the abrasive touches the threaded steel area. Simply screw the cartridge roll onto the threads to secure. Your mandrel should be at least 13mm longer than your cartridge roll.



Shank Diameter	Type	To suit Rolls	Weight per 5	Order Code YRK-205	Price/1 THB
3mm	CRM1	CR1	35g	-7510K	258.00
		CR3			
6mm	CRM4	CR4	55g	-7540K	304.00
		CR5			
		CR7			
		CRT1			
		CRT4			
6mm	CRM5	CR6	55g	-7550K	304.00
		CR8			
		CRT3			
		CRT5			
		CRT6			
6mm	CRM7	CR10	80g	-7570K	304.00
		CR11			

Taper Type

Tapered for angles, corners and irregular or concave surfaces.

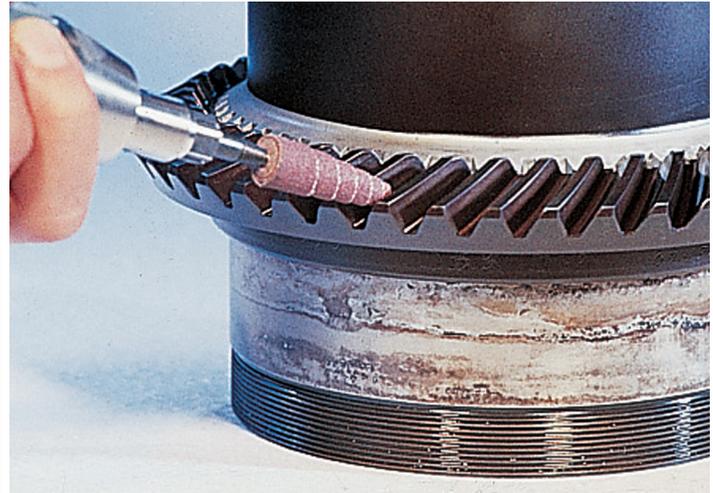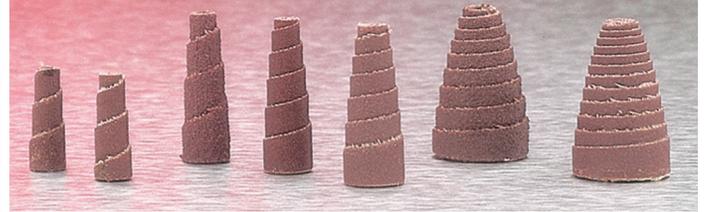

Diameter x Length (mm)	Type	Grit	Weight per 100	Order Code YRK-205	Price/1 THB
9.5 x 25	CRT1	P60	235g	-7310K	52.00
		P120		-7320K	52.00
9.5 x 38	P80	P80	256g	-7315K	52.00
		P60		-7330K	52.00
12 x 25	CRT2	P60	270g	-7350K	55.00
		P80		-7355K	55.00
12 x 38	CRT3	P120	460g	-7360K	55.00

Cartridge Roll Kit

Spirally wound aluminium oxide cloth roll that wears in use, constantly exposing new abrasive. Used for weld flash removal, deburring, blending and polishing applications.

Contents:

Straight type rolls: 6 - 10 x 38mm P80 and P120, 4 - 13 x 38mm P80 and P120, 12 - 6 x 38mm P80 and P120, 16 - 6 x 25mm P80 and P125, 6 - 10 x 25mm P80 and P120.

Taper type rolls: 6 - 10 x 38mm P80. 6 - 13 x 38mm P80.

Mandrels: 1 - 3 x 25 x 6mm, 1 - 3 x 19 x 6mm.

122
PIECES



Order Code
YRK-205
-9800K

Price/1
THB
4720.00