


KOBE Retracting Airline Hoses

With brass 360° swivel couplings, ideal for use in awkward access areas. Recoils to a fraction of its working length leaving the work place clear of entanglement hazards.

Extended length: 7.5m.

Pressure rating: 6.0mm diameter - 250psi
9.5mm diameter - 150psi.

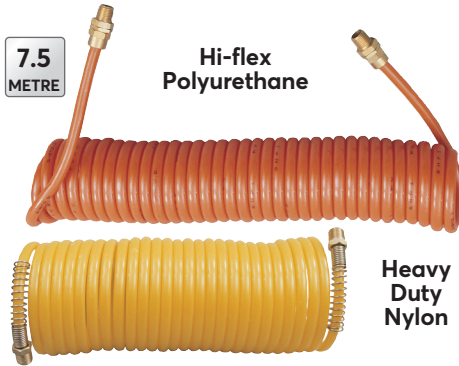

Thread (BSPT)	Bore Dia.	Weight each	Order Code KBE-280	Price/1 THB
Hi-flex Polyurethane				
1/4"	6.0mm	850g	-1160K	NA
Heavy Duty Nylon Air Hose				
1/4"	6.0mm	850g	-1140K	483.00
3/8"	9.5mm	850g	-1300K	1649.00

Retractable Air Hose Balancer

With adjustable tension return, it retracts when the air tool is released, leaving the work place clear of unwanted lengths of air hose. Ideally suited for in-line production. With spring loaded safety clip for overhead fixing.



Hose length: 1.5m.
Hose I.D.: 5mm.
Hose O.D.: 8mm.
Maximum pressure: 200psi.
Hoist range: 0 - 1.5kg.

Weight each	Order Code KBE-280	Price/1 THB
850g	-1000K	6311.00

Whip Hose Adaptor

Supplies air between supply point and air tool. Prevents vibration damage to couplings and the tool user. Quick release coupling.

Overall length: 650mm.



Thread (BSPT)	Bore Dia.	Weight each	Order Code KBE-280	Price/1 THB
1/4"	6.0mm	145g	-1360K	620.00

PU Air & Water Hose Reels

Auto layering mechanism to prevent jamming. Working pressure 8 bar (120 PSI). Suitable for water up to 45°C. 180° pivoting wall bracket included - can be fixed to walls or ceilings. 1/4 BSPT. Conforms to BS EN ISO 12100: 2010.



Hose Size Bore x Length	Order Code KBE-258	Price/1 THB
6mm x 12m	-1050K	4176.00
8mm x 12m	-1060K	4280.00
10mm x 10m	-1070K	5600.00

Rubber Air & Water Hose Reels

Designed for professional garages/workshops. Controlled slow rewind with auto layering mechanism to prevent jamming. Suitable for water up to 45°C. Working pressure 18 bar (260 PSI). 180° pivoting wall bracket included - can be fixed to walls or ceilings. 1/4 BSPT Conforms to BS EN ISO 12100 : 2010.



Hose Size Bore x Length	Order Code KBE-258	Price/1 THB
10mm x 15m	-1110K	5072.00
10mm x 20m	-1120K	7030.00
10mm x 30m	-1130K	9339.00

KENNEDY Through Flow Air Hose

Easy wind reel mechanism. With high impact resistant drum and guide walls. 1/2" air hose fitted with two ear hose clips and standard PCL couplings for 1/2" hose. 15bar working pressure. The axial supply allows the hose to be wound and unwound during operation. Supplied with 1.5m supply connection hose and wall mounting hooks.



Size	Weight each	Order Code KEN-258	Price/1 THB
20m	4.5kg	-5100K	1988.00

Industrial PVC Airline Hose

Reinforced with a polyester fibre braid. Used in pneumatic airline systems, crop spraying, transportation of gases and liquids, decanting of acids, salts and many other chemicals. Fully approved for food contact applications. Operating temperature range of -20°C to +60°C.

Maximum pressure ratings:

6.35mm - 250psi,
9.50mm - 150psi,
12.7mm - 130psi,
19.0mm - 100psi.



Supplied in 30m (100ft) reels.

Bore Size (mm)	Weight each	Order Code KEN-258	Price/1 THB
6.35 (1/4")	3.6kg	-1010K	1218.00
9.50 (3/8")	4.5kg	-1030K	1495.00
12.70 (1/2")	5.9kg	-1050K	1865.00
19.00 (3/4")	9.0kg	-1070K	2718.00

YORK ABRASIVES Silicon Carbide Valve Grinding Compound

For cutting brass, hardened steel and cast iron. Ideally used within the automotive and engineering industry. For heavy and light stock removal applications, from the removal of pits in exhaust pipes to the finishing of inlet valves.

*Contains 1x fine 85g and 1x coarse 85g

Size	Type	Weight each	Order Code YRK-257	Price/1 THB
85g*	Fine/Coarse	290g	-2100K	462.00
200g	Fine	250g	-2010K	344.00
	Coarse	235g	-2050K	344.00
500g	Fine	560g	-2020K	525.00
	Coarse	560g	-2060K	441.00



BEST SELLER