

## KOBE High Speed Mini Die Grinder

### GD2806L

For precision engineers' mould making etc. Safety lever throttle, front exhaust, ultra compact and lightweight.

**Collet size:** 6mm. **Air inlet thread:** 1/4" NPT.  
**Minimum air hose size (ID):** 10mm (3/8"). **Air pressure:** 90psi.  
**Air consumption:** 4cfm\*. **Sound pressure level:** 94dBA.  
**Sound power level:** 103dBA. **Vibration level:** 5.0m/s<sup>2</sup>.  
**Overall length:** 120mm.



Uses Long Collet Nut


Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
25,000	450g	-2035M	2520.00	

## Extended Spindle Die Grinder

### GES2506L

For extra reach in 'hard to get at' areas, extended spindle housing allowing two-handed operation, rear exhaust, safety lever throttle.

**Collet size:** 6mm. **Air inlet thread:** 1/4" NPT.  
**Minimum air hose size (ID):** 10mm (3/8"). **Air pressure:** 90psi.

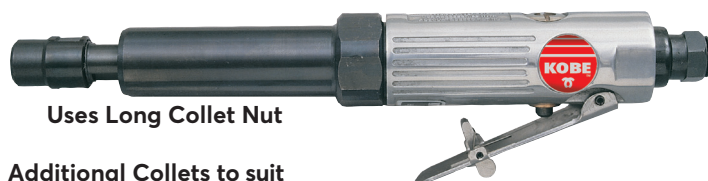

Uses Long Collet Nut

### Additional Collets to suit Kobe and similar grinders

Collet Size	Order Code KBE-280	Price/1 THB
3mm	-0073A	410.00
1/8" (3.175mm)	-0079A	296.00
6mm	-0070A	410.00
1/4" (6.35mm)	-0076A	261.00
Collet Nut (Short)	-0064A	125.00
Collet Nut (Long)	-0067A	148.00

**Air consumption:** 4cfm\*.  
**Sound pressure level:** 93dBA.  
**Sound power level:** 103dBA.  
**Vibration level:** 5.4m/s<sup>2</sup>.  
**Overall length:** 248mm.

Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
25,000	850g	-2040N	4305.00	

## Surface Conditioning & Finishing Kit

### SCF2206K

Multi-purpose kit containing: one of each of the following surface preparation discs - fine, medium and coarse.  
 2x abrasive disc grades - P36, P60, P80 and P120.

1x 6mm diameter shank to fit the backing pad.  
 Includes: GDA2206L, Angle Die Grinder as shown right. Supplied in a sturdy plastic carry case.



Uses Long Collet Nut

Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
22,000	1.25kg	-7000K	8904.00	

## Air Tools - Grinders

### Straight Die Grinder

#### GD2206L

Suitable for polishing, buffing and grinding. The robust and durable single piece aluminium body houses the 1/2hp motor and precision balanced bearings provide reliability in the most demanding of industrial/ automotive applications. The trigger has a safety catch to prevent accidental starts.

**Collet size:** 6mm. **Air inlet thread:** 1/4" NPT.  
**Minimum air hose size (ID):** 10mm (3/8"). **Air pressure:** 90psi.  
**Air consumption:** 4cfm\*. **Sound pressure level:** 93dBA.  
**Sound power level:** 103dBA. **Vibration level:** 5.4m/s<sup>2</sup>.  
**Overall length:** 170mm. **Motor:** 1/2hp.



Uses Short Collet Nut

Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
22,000	500g	-2024K	2415.00	

### Die Grinder Kit

#### GD22LK

Includes: GD2206L, as shown above. With 3 and 6mm collets, 10 assorted mounted points and robust blow moulded case.



Uses Short Collet Nut

Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
22,000	600g	-2030L	2835.00	

### 90° Angle Die Grinder

#### GDA2206L

Safety lever throttle, reverse exhaust, Ideal for polishing, grinding and buffing, suitable for use in confined areas.

**Collet size:** 6mm. **Air inlet thread:** 1/4" NPT.  
**Minimum air hose size:** 10mm (3/8").  
**Air pressure:** 90psi/6.2bar. **Air consumption:** 4cfm\*.  
**Sound pressure level:** 85dBA. **Sound power level:** 99dBA.  
**Vibration level:** 7.0m/s<sup>2</sup>. **Overall length:** 160mm.



Uses Long Collet Nut

Free Speed (rpm)	Weight each	Order Code KBE-270	Price/1 THB	*Based on a 15 second cycle per minute average use.
22,000	500g	-2020H	4410.00	