

OXFORD
PRECISION

Enamelled Frame External Micrometers

With enamelled frame and tungsten carbide tipped anvils. High quality fitted metal case with adjusting spanner. Sizes 25 - 50mm/1 - 2" and over supplied with setting standard. Manufactured to **BS 870**.
All supplied in a impact resistant fitted plastic case.




Sizes
25 - 50mm/1 - 2"
and over
supplied with
setting standard.

Range	Resolution	Weight each	Order Code OXD-335	Price/1 THB
Metric				
0 - 25mm	0.01mm	230g	-5010K	1377.00
25 - 50mm	0.01mm	300g	-5020K	1494.00
50 - 75mm	0.01mm	400g	-5030K	1719.00
75 - 100mm	0.01mm	530g	-5040K	1944.00
100 - 125mm	0.01mm	770g	-5050K	2178.00
125 - 150mm	0.01mm	800g	-5060K	2491.00
150 - 175mm	0.01mm	-	-5070K	3026.00
175 - 200mm	0.01mm	-	-5080K	3387.00
200 - 225mm	0.01mm	-	-5090K	3718.00
225 - 250mm	0.01mm	-	-5100K	4335.00
250 - 275mm	0.01mm	-	-5110K	4422.00
275 - 300mm	0.01mm	-	-5120K	4537.00
Inch				
0 - 1"	0.001"	230g	-6010K	1500.00
1 - 2"	0.001"	300g	-6020K	1570.00
2 - 3"	0.001"	400g	-6030K	1820.00
3 - 4"	0.001"	530g	-6040K	2060.00
4 - 5"	0.001"	770g	-6050K	2300.00
5 - 6"	0.001"	800g	-6060K	2790.00

Micrometer Setting Standards

For setting external micrometers, calipers etc. to zero, providing accurate repeatability of measurements. Flat, lapped measuring ends with fitted heat insulation block. Manufactured to **BS 870**.

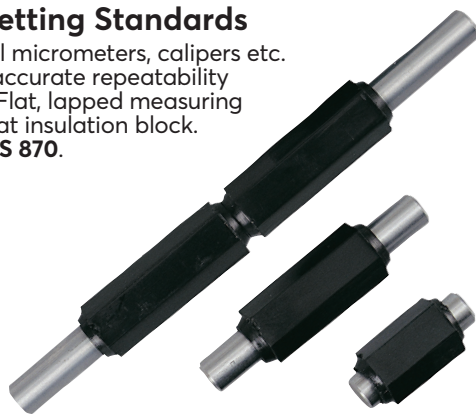

Size	Weight each	Order Code OXD-335	Size	Weight each	Order Code OXD-335	Price/1 THB
25mm	10g	-7010K	1"	10g	-7110K	193.00
50mm	10g	-7020K	2"	10g	-7120K	193.00
75mm	20g	-7030K	3"	20g	-7130K	319.00
100mm	30g	-7040K	4"	30g	-7140K	441.00
125mm	40g	-7050K	5"	40g	-7150K	567.00
150mm	62g	-7060K	-	-	-	893.00
175mm	76g	-7065K	-	-	-	956.00
200mm	86g	-7070K	-	-	-	956.00
225mm	95g	-7075K	-	-	-	1019.00
250mm	105g	-7080K	-	-	-	1134.00
275mm	115g	-7085K	-	-	-	1134.00
300mm	268g	-7090K	-	-	-	1397.00

KENNEDY
QUALITY INDUSTRIAL TOOLING

Enamelled Frame External Micrometers

Enamelled frame and tungsten carbide tipped anvils. Manufactured to **BS 870**. Supplied in a durable plastic case.

Accuracy:

Flatness: 0.6mm.

Parallelism: $(2 + L/100) \mu\text{m}$ (fraction rounded down).

Instrumental error: $\pm(1 + L/75) \mu\text{m}$ (fraction rounded up).

L = maximum measuring length.



Range	Resolution	Weight each	Order Code KEN-335	Price/1 THB
Metric				
0 - 25mm	0.01mm	230g	-0010K	1335.00
25 - 50mm	0.01mm	300g	-0020K	1425.00
50 - 75mm	0.01mm	400g	-0030K	1538.00
75 - 100mm	0.01mm	530g	-0040K	1814.00
100 - 125mm	0.01mm	770g	-0050K	2022.00
125 - 150mm	0.01mm	800g	-0060K	2663.00

KENNEDY Micrometer Stand

SMS230

Made of cast iron, it is designed for use with most standard micrometers up to 100mm (4"). The clamp has positive angular and padded parallel clamping jaws. 90° pivoting in the vertical plane.



Product Number	Weight each	Order Code KEN-335	Price/1 THB
SMS230	980g	-7230M	861.00