Piston Ring Compressors

Compresses piston rings into position reducing the risk of damage to components. Key operated with ratchet mechanism and safety valve. Made from tempered spring steel complete with steel key.

PRC-540
For passenger car vehicle engines.
Capacity: 57 - 125mm (2¼" - 5").
Height: 80mm (3¼").

PRC-730
For car/light commercial vehicle engines.
Capacity: 90 - 175mm (3½" - 7").
Height: 100mm (4").

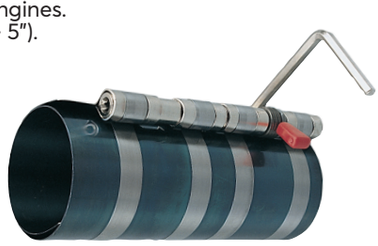

PRC-765
For heavy commercial vehicle engines.
Capacity: 90 - 175mm (3½" - 7").
Height: 165mm (6½").

Model Number	Capacity (mm)	Order Code KEN-503	Price/1 THB
PRC540	57 - 125	-2210K	998.00
PRC730	90 - 175	-2240K	1239.00
PRC765	90 - 175	-2270K	2205.00

Valve & Piston Ring Compressors

Designed for use on production lines as well as in the automotive workshop. Able to cope with occasional commercial use. Manufactured from bright nickel plated steel with PVC cushion grips.



Opening Capacity	Throat Depth	Order Code KEN-503	Price/1 THB
Straight			
75-230	230	-2010K	2289.00
Straight/Curved			
45-230	230	-2030K	NA

Piston Ring Pliers

Enables fast installation or removal of piston rings. A self-adjusting spring tensioned mechanism manufactured from nickel-plated steel with PVC handles for extra grip.



Model Number	Capacity (mm)	Order Code KEN-503	Price/1 THB
PRP100	50 - 100	-2090K	1344.00

Valve Spring Compressors

A unique 'direct action' compressor lever gives improved visibility and ease of use in areas of difficult access. In heavy duty steel with all rivetted joints and a slip resistant rubber handle.

VSC145
For use on large and diesel engines.
Restricted access adaptors: 25, 30mm.
Throat clearance: 250mm.



35 - 200mm Capacity

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 THB
35-200mm	2.50kg	-2700K	3591.00

VSC175
For use on multi-valve petrol and diesel engines with deep seated valves.
Restricted access adaptors: 25, 30mm.
Throat clearance: 165mm.
Packaging dimensions (W x H x D):
430 x 205 x 40mm.



55 - 175mm Capacity

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 THB
55-175mm	2.20kg	-2710K	3728.00

Straight Head Valve Seal Ring Pliers

For the easy removal of most valve stem seals and lower valve spring guides in restricted areas above the cylinder head. Gripping serrations inside the jaws aid gripping the outside diameter of the valve stem seal. Steel pliers with double rivetted metal handles.

Standard Overalll length:
250mm, 50mm reach.



Extra Long Overall length: 270mm, 80mm reach.



Type	Order Code KEN-503	Price/1 THB
Standard	-2680K	903.00
Extra Long	-2690K	1239.00

© 2022

OS21_APAC_TH_0315.indd 1 07/12/2021 09:44