EDISON Standard Nylon Cable Ties

Width Max. Tensile. Suitable for securing or retaining cable / pipe UL approved polyamide 6.6, 94V-2 bundles and objects of various shapes and sizes. The design of the head guarantees a high tensile strength while allowing a very low insertion force.

- Manufactured from high quality nylon: UL approved polyamide 6.6, 94V-2
- Heat resistant up to 85°C
- Flame-retardant
- Supplied in a pack of 100

All Dimensions are approximate.





Product Number	Length L (mm)	Width W (mm)	Max. Bundle Dia. (mm)	Tensile Strength (kg)	Order Code Black	Order Code EDI-515 White	Price/Pk THB
CT1	2.5	100	22	8.1	-0000K	-1000K	43.00
CT23	2.5	160	40	8.1	-0010K	-1010K	62.00
CT4	2.5	200	102	22.2	-0020K	-1020K	89.00
CT2	3.6	140	53	18.2	-0100K	-1100K	123.00
CT20	3.6	200	10	8.1	-0110K	-1110K	123.00
CT7	3.6	300	33	18.2	-0120K	-1120K	167.00
CT29	3.6	370	76	18.2	-0130K	-1130K	213.00
CT25	4.8	120	24	22.2	-0200K	-1200K	113.00
CT5	4.8	200	110	22.2	-0210K	-1210K	149.00
CT8	4.8	300	76	22.2	-0220K	-1220K	213.00
CT10	4.8	370	53	18.2	-0230K	-1230K	315.00
CT12	4.8	430	38	18.2	-0240K	-1240K	338.00
CT6	7.6	200	50	54.4	-0300K	-1300K	315.00
CT9	7.6	300	76	54.4	-0310K	-1310K	405.00
CT11	7.6	368	10	54.4	-0320K	-1320K	495.00
CT35	7.6	450	13	54.4	-0330K	-1330K	713.00
CT16	9	526	140	79.4	-0400K	-1400K	990.00
CT21	9	780	228	79.4	-0410K	-1410K	1492.00
CT48	12	580	204	114.0	-0500K	-1500K	1720.00










KENNEDY QUALITY INDUSTRIAL TOOLING Magnetic Cable Guider

An innovative tool for inserting cables through brick walls, cavity walls, studwork etc. Tested by major utilities - saves hours of engineer's time. Includes three adaptors for 3.7 to 5.9mm cable diameters. Drill bit not included.

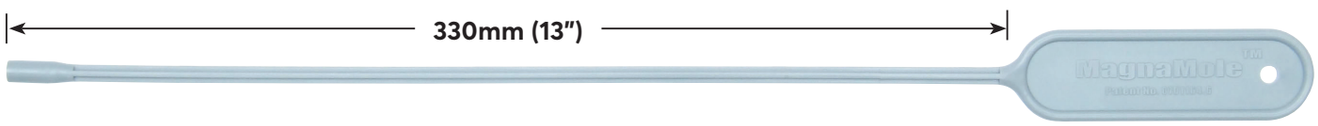




NOT FOR USE WITH LIVE CABLES!

Type	Order Code KEN-516	Price/1 THB
Cable Guider	-9600K	1523.00
Caps (Pk 6)	-9620K	525.00

Push through cable guider



Attach to guider and pull back through

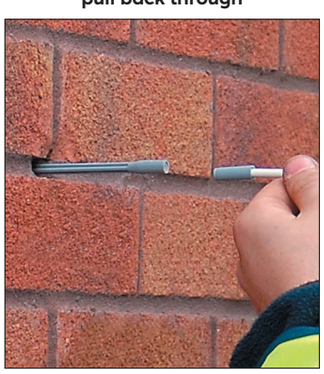

© 2022

OS21_APAC_TH_0345.indd 1 07/12/2021 10:00