


KENNEDY
QUALITY INDUSTRIAL TOOLING

Depth & Angle Gauges

Plain Type Depth Gauge

Designed for measuring flat based recesses. Consisting of a precision ground steel rule and body which are positioned at 90° to each other. The body has precision ground locating faces, with a knurled adjusting/securing nut.


Rule
Length:
150mm (6")

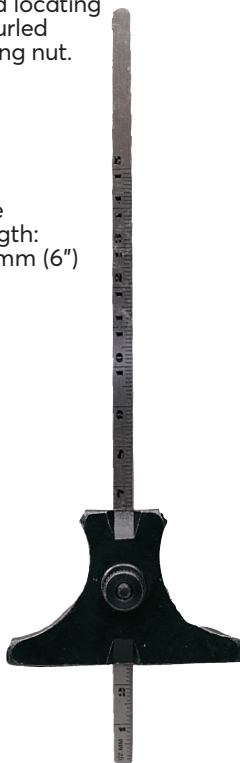

Protractor Type Depth & Angle Gauge

Ground steel with graduations from 0° - 180° in both directions. When rule is positioned to 90° it then provides accurate measurements of depth.

Rule
Length:
150mm (6")

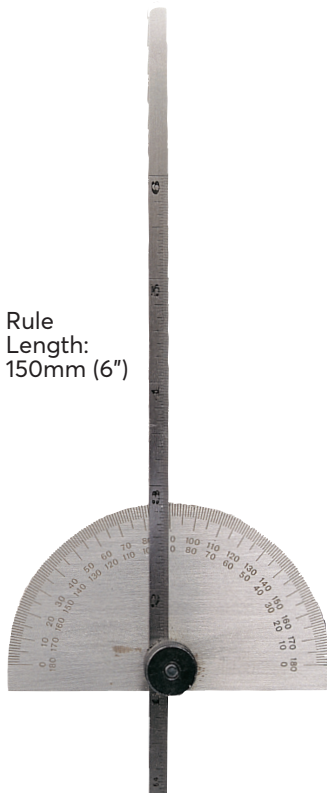

Type	Order Code KEN-518	Price/1 THB
Plain	-3400K	1533.00
Protractor	-3450K	1208.00

Feeler Stock Strip

Inch sizes are 12" long, 1/2" wide. Millimetre sizes are furnished in 300mm lengths, 12.7mm wide. Rounded ends. Each piece marked with thickness and with convenient 3/16" (5mm) hole for hanging.



Thickness (mm)	Weight per 10	Order Code KEN-519	Price/1 THB
12.7mm x 300mm			
0.03	15g	-1030K	107.00
0.04	15g	-1040K	77.00
0.05	15g	-1050K	77.00
0.06	20g	-1060K	77.00
0.08	25g	-1080K	77.00
0.10	30g	-1100K	62.00
0.15	45g	-1150K	75.00
0.20	60g	-1200K	83.00
0.25	75g	-1250K	83.00
0.30	80g	-1300K	83.00
0.40	120g	-1400K	83.00
0.50	150g	-1500K	83.00
1/2" x 12"			
0.0010"	60g	-0020K	77.00
0.0015"	20g	-0030K	90.00
0.0020"	20g	-0040K	90.00
0.0025"	20g	-0050K	90.00
0.0030"	30g	-0060K	90.00
0.0040"	40g	-0080K	77.00
0.0050"	40g	-0100K	77.00
0.0060"	40g	-0120K	77.00
0.0070"	60g	-0140K	77.00
0.0080"	70g	-0160K	77.00
0.0090"	70g	-0180K	72.00
0.0100"	80g	-0200K	72.00
0.0120"	90g	-0240K	72.00
0.0150"	110g	-0300K	72.00
0.0200"	150g	-0400K	72.00
0.0250"	200g	-0500K	72.00

Radius Gauges

Manufactured from hardened and polished steel. Enclosed in a steel case.

Size range:

34 Blade Metric: 1.0 to 3.0 x .25 and 3.5 to 7.0 x .5
32 Blade Metric: 7.5 to 15.0 x .5
32 Blade Inch: 17/64" to 1/2" x 1/64"
30 Blade Metric: 15.5 to 20.0 x .5 and 21.0 to 25.0 x 1
30 Blade Inch: 1/32" to 1/4" x 1/64".



No. of Blades	Weight each	Order Code KEN-518	Price/1 THB
34	70g	-0820K	903.00
32	80g	-0850K	935.00
32	120g	-0940K	1065.00
30	95g	-0890K	990.00
30	70g	-0920K	938.00

Feeler Stock Coil

Also useful for shimming in fixture and die work. Supplied in a compact, sturdy plastic rewindable dispenser case. Rewind feature, minimises accidental damage. Made of the finest tempered steel, marked every 6" or 150mm with a line, thickness in thousandths of an inch or in hundredths of a mm.




Thickness (mm)	Weight each	Order Code KEN-519	Price/1 THB
12.7mm x 7.6mm			
0.03	60g	-3030K	1428.00
0.04	70g	-3040K	1428.00
0.05	75g	-3050K	1428.00
0.10	110g	-3100K	1428.00
0.20	230g	-3200K	1428.00
0.50	390g	-3500K	1428.00
1/2" x 25ft			
0.0010"	100g	-2020K	1376.00
0.0015"	60g	-2030K	1302.00
0.0020"	70g	-2040K	1302.00
0.0030"	90g	-2060K	1302.00
0.0040"	110g	-2080K	1302.00
0.0050"	135g	-2100K	1302.00
0.0060"	150g	-2120K	1302.00
0.0150"	360g	-2300K	1376.00
1/2" x 20ft			
0.0200"	430g	-2400K	1302.00
0.0240"	459g	-2480K	3266.00
0.0250"	500g	-2500K	1302.00

Screw Pitch Gauges

Manufactured from hardened and polished steel, blades are precision milled. Enclosed in a steel case.

Range of sizes: Whitworth - 4 - 62 TPI;
Metric - 0.75 - 6mm; American - 4 - 42 TPI.

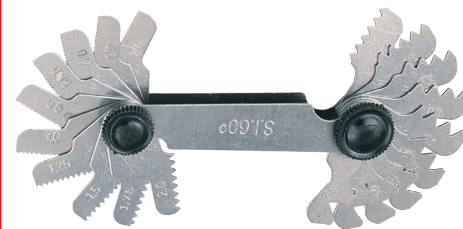

Type	No. of Blades	Order Code KEN-518	Price/1 THB
55° Whit.	28	-1000K	337.00
60° Metric	20	-1010K	349.00
60° USA	30	-1070K	393.00