

KENNEDY PROFESSIONAL Insulated Adjustable Wrenches

Manufactured from chrome vanadium steel with hardened parallel opening jaws that are ground and polished, laser etched with metric graduations for rapid repeatable reference setting. The wide grooved profile of the opening mechanism and coarsely knurled adjusting screw ensures smooth adjustment. Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.



| Overall Length | Capacity | Weight each | Order Code KEN-534 | Price/1 THB |
|----------------|----------|-------------|--------------------|-------------|
| 200mm | 24mm | 336g | -6080K | 3182.00 |
| 250mm | 30mm | 551g | -6100K | 3906.00 |
| 300mm | 34mm | 870g | -6120K | 4757.00 |

Insulated Spanners

Chrome vanadium single ended open jaw spanners. Spanner dimensions conform to **DIN 7446**. Fully insulated to conform to **VDE 0680/201** and **EN 60900:2012** standards for safe electrical applications up to 1000V.

Single End Open Jaw



| Size | Weight each | Order Code KEN-534 | Price/1 THB |
|------|-------------|--------------------|-------------|
| 10mm | 30g | -8800K | 1092.00 |
| 11mm | 45g | -8810K | 1092.00 |
| 12mm | 60g | -8820K | 1092.00 |
| 13mm | 60g | -8830K | 1113.00 |
| 14mm | 70g | -8840K | 1260.00 |
| 15mm | 85g | -8850K | 1260.00 |
| 16mm | 115g | -8860K | 1376.00 |
| 17mm | 110g | -8870K | 1439.00 |
| 18mm | 135g | -8880K | 1460.00 |
| 19mm | 150g | -8890K | 1491.00 |
| 21mm | 205g | -8910K | 1544.00 |
| 24mm | 250g | -8940K | 1628.00 |


Insulated Single End Ring Spanners



| Size | Weight each | Order Code KEN-534 | Price/1 THB |
|------|-------------|--------------------|-------------|
| 10mm | 85g | -9200K | 1260.00 |
| 11mm | 110g | -9210K | 1260.00 |
| 12mm | 120g | -9220K | 1260.00 |
| 13mm | 125g | -9230K | 1376.00 |
| 14mm | 175g | -9240K | 1439.00 |
| 15mm | 135g | -9250K | 1607.00 |
| 16mm | 175g | -9260K | 1659.00 |
| 17mm | 190g | -9270K | 1775.00 |
| 18mm | 220g | -9280K | 1890.00 |
| 19mm | 250g | -9290K | 2006.00 |
| 21mm | 310g | -9310K | 2121.00 |
| 22mm | 325g | -9320K | 2237.00 |
| 24mm | 340g | -9340K | 2405.00 |

Insulated Hacksaw

Die cast frame with 'D' style handle for user comfort and control. Wing nut blade tensioning. Supplied complete with 300mm 24tpi blade. Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.

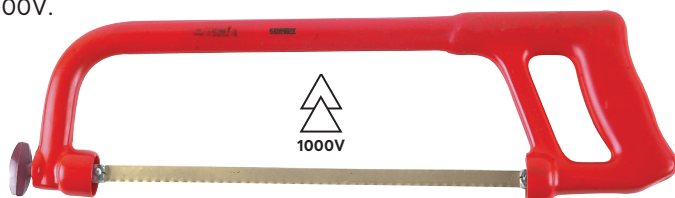

| Overall Length | Weight each | Order Code KEN-534 | Price/1 THB |
|----------------|-------------|--------------------|-------------|
| 400mm | 619g | -0800K | 4946.00 |

Insulated Pump/Box Joint Pliers

Hardened chromed steel jaws. Sliding pivot joint allows the widest range of jaw openings. Serrated jaws for gripping flat and round parts. The handles cannot be closed together, preventing trapped fingers.



Fully insulated, conforms to **EN 60900:2012** standards for safe electrical applications up to 1000V.



| Overall Length | Weight each | Order Code KEN-534 | Price/1 THB |
|----------------|-------------|--------------------|-------------|
| 240mm | 55g | -4860K | 2541.00 |

Insulated Tweezers

Straight/bent pattern tweezers with serrated gripping surface. Quality tested and insulated to 1000V AC. Conforms to **EN 60900:2012** standards.

Overall length: 145mm. Exposed blade length: 15mm.



Straight Pattern



Bent Pattern



| Overall Length | Type | Weight each | Order Code KEN-534 | Price/1 THB |
|----------------|----------|-------------|--------------------|-------------|
| 145mm | Straight | 40g | -1120K | 1239.00 |
| 145mm | Bent | 40g | -1140K | 1491.00 |

Insulated Junior Hacksaw

Quality tested and insulated to 1000V AC and 1500V DC for live line working. All insulation is moulded in one piece, thus avoiding possible air gaps or other potential hazards. Uses conventional junior hacksaw blades. **EN 60900:2012**.



| Overall Length | Weight each | Order Code KEN-534 | Price/1 THB |
|----------------|-------------|--------------------|-------------|
| 150mm (6") | 264g | -0600K | 2720.00 |