

**YAMOTO** Lever Pump


Steel lever action barrel pump complete with self adjusting telescopic suction tube and comfortable handle grip. Suitable for lubricants and non-corrosive liquids. For use with BSP and metric threaded barrels.



Discharge per Stroke	Weight each	Order Code	Price/1 THB
300ml	2.14kg	-3001K	1943.00

**KENNEDY** Lever Pump

**LP300**  
Zinc chrome finish steel, telescopic suction tube. Suitable for lubricants, diesel and non-corrosive liquids. Suitable for container sizes 60 and 200ltr. Tube length 480 - 900mm. Inlet on pump 2" BSP and M59 x 5 male thread.

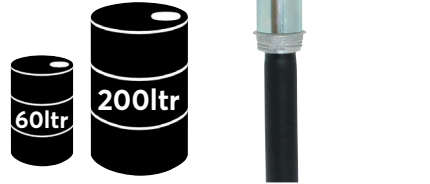

Discharge per Stroke	Weight each	Order Code	Price/1 THB
300ml	2.0kg	-3000K	2825.00

**KENNEDY** Piston Pump

**PP190**  
Polypropylene pump with viton seals. Chemical resistant. Suitable for lubricants, fuels, solvents and non-corrosive liquids. Suitable for container size 200ltr. Tube length 480 - 900mm. Inlet on pump 2" BSP male and female thread.



Discharge per Stroke	Weight each	Order Code	Price/1 THB
190ml	730g	-3250K	NA

**Rotary Pump**

**RP250**  
Cast iron pump, steel suction tube and spout. Suitable for lubricants and diesel (not anti-freeze). Suitable for container size 200ltr. Tube length 980mm. Inlet on pump 2" BSP and M59 x 5 male thread.




Discharge per Stroke	Weight each	Order Code	Price/1 THB
250ml 35ltr/min	5.7kg	-3100K	3990.00

**Syphon Pump**

Flexible plastic outlet and semi-rigid inlet tubes. Hand pumping units incorporate one-way valves. Suitable for use with petrol, diesel and non-corrosive liquids. All tubes can be cut to length.

**SPS/25** For use with containers up to 25ltr. Fitted with 30mm bung.  
**Tube length:** inlet 410mm/outlet 530mm.  
**SPS/205** For use with containers up to 205ltr. Fitted with a 50mm threaded bung.  
**Tube length:** inlet 860mm/outlet 1000mm.  
**SPH/205** Heavy duty, for use with containers up to 205ltr. Fitted with a 50mm threaded bung.  
**Tube length:** inlet 860mm/outlet 1000mm.

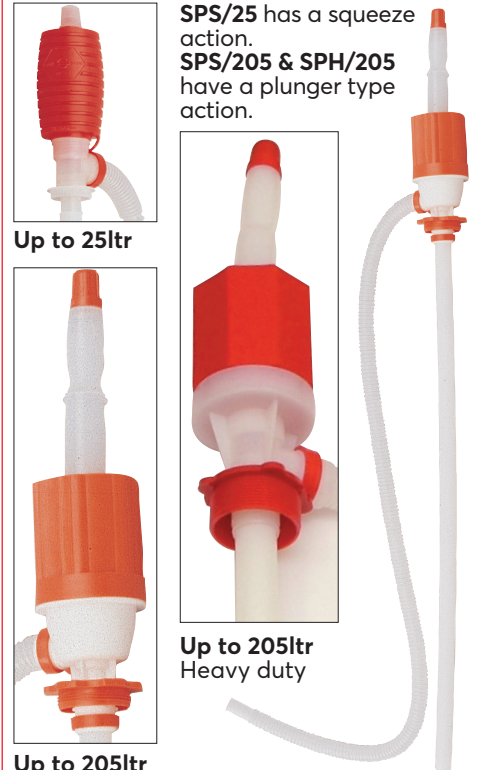


Model Number	Suitable for Containers	Weight each	Order Code	Price/1 THB
SPS/25	25ltr	40g	-4000K	233.00
SPS/205	205ltr	80g	-4050K	1020.00
SPH/205	205ltr	420g	-4150K	1146.00

**Drum Taps**

With 3/4" BSP male threads. Both models can be locked into the off position by use of a padlock or locking pin.

**Polypropylene**  
Not suitable for petroleum-based products.

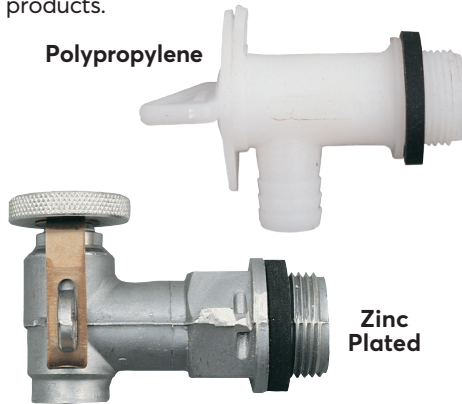

Type	Weight each	Order Code	Price/1 THB
Zinc-Plated	300g	-9000K	1376.00
Polypropylene	100g	-9050K	351.00

**Rotary Chemical Dispensing Pump**

Pump body made from glass filled polypropylene with Ryton veins and Vitron rubber seals. All hardware is stainless steel. For use on both plastic and metal drums. For use with water-based fluids, anti-freeze, acids, chemicals etc.

**DO NOT USE** with acetone, lacquer, mineral oils, solvents or turpentine.



Discharge per Stroke	Weight each	Order Code	Price/1 THB
250ml	3kg	-3800K	6206.00

**Double Diaphragm Fuel Transfer Pump**

Heavy duty aluminium die-cast construction fuel transfer pump with a discharge rate of up to 1 gallon per 5 strokes (800ml per stroke). Stainless steel piston and fuel resistant hi-nitrile rubber diaphragm. 2" die cast bung adapter and extra heavy-duty steel handle with security locking latch. Pump inlet is fitted with an easy to clean wire mesh screen filter. Telescopic suction tube, adjustable to fit 50 to 205ltr drums, with non-return valve. Easy dispensing through 2.4m (8') of antistatic neoprene rubber hose with die-cast dispensing nozzle.

Discharge per Stroke	Weight each	Order Code	Price/1 THB
800ml	7.5kg	-3600K	11876.00