



European Pattern Circlip Pliers


Industrial quality chrome vanadium hardened and tempered. PVC cushion grip handles. Coil sprung to aid operation.

External - Straight Jaw



Circlip Capacity	Overall Length	Weight each	Order Code KEN-558	Price/1 THB
10 - 25mm	125mm (5")	65g	-6520K	504.00
19 - 40mm	175mm (7")	135g	-6570K	557.00
32 - 60mm	250mm (10")	265g	-6620K	1103.00

External - 90° Angled Jaw

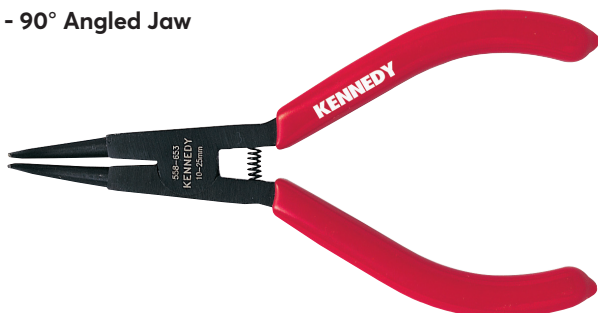

Circlip Capacity	Overall Length	Weight each	Order Code KEN-558	Price/1 THB
10 - 25mm	125mm (5")	65g	-6530K	504.00
19 - 40mm	175mm (7")	140g	-6580K	557.00
32 - 80mm	250mm (10")	260g	-6630K	1103.00

Internal - Straight Jaw



Circlip Capacity	Overall Length	Weight each	Order Code KEN-558	Price/1 THB
10 - 25mm	125mm (5")	65g	-6500K	504.00
19 - 65mm	175mm (7")	130g	-6550K	557.00
32 - 60mm	250mm (10")	250g	-6600K	1103.00

Internal - 90° Angled Jaw




Circlip Capacity	Overall Length	Weight each	Order Code KEN-558	Price/1 THB
10 - 25mm	125mm (5")	65g	-6510K	504.00
19 - 65mm	175mm (7")	140g	-6560K	557.00
32 - 80mm	250mm (10")	260g	-6610K	1103.00

Circlip Pliers

Long Handled

Industrial quality chrome vanadium hardened and tempered. PVC cushion grip handles. Coil sprung to aid operation.

Overall length: 300mm (12").

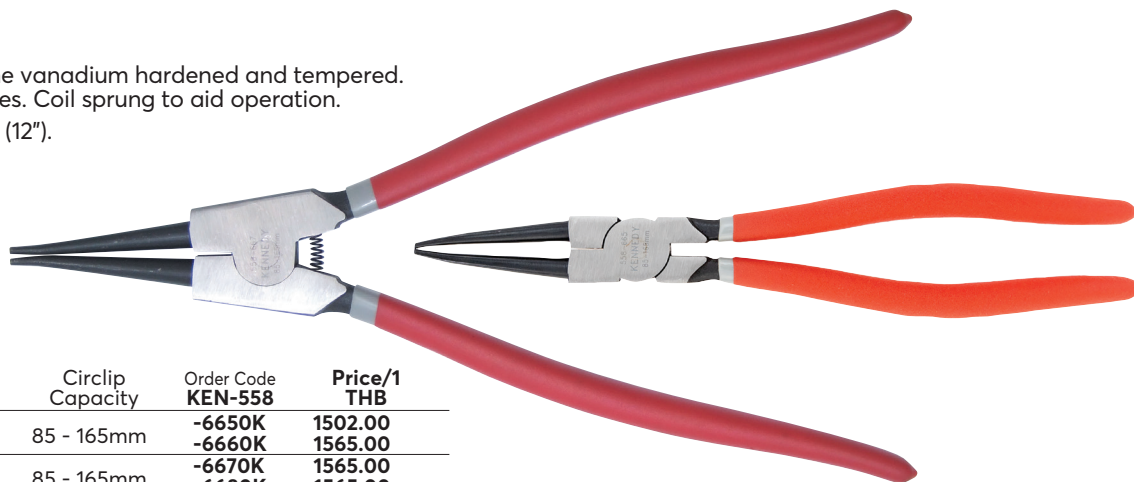

Type	Jaw	Circlip Capacity	Order Code KEN-558	Price/1 THB
Internal	Straight	85 - 165mm	-6650K	1502.00
	90° angled		-6660K	1565.00
External	Straight	85 - 165mm	-6670K	1565.00
	90° angled		-6680K	1565.00

Heavy Duty Snap Ring Pliers

Ratcheting

Heat-treated steel circlip pliers for large equipment repair. Replaceable tips and spring ratchet locking mechanism to securely hold against snap ring tension. Black powder coated. Galvanised tips and lock lever. Insulated lever handle.

Overall length: 510mm (20").



Type	Jaw	Circlip Capacity	Order Code KEN-558	Price/1 THB
Internal	Straight	165 - 300mm	-6700K	5198.00
	90° angled		-6710K	4893.00
External	Straight	165 - 300mm	-6720K	4893.00
	90° angled		-6730K	4893.00

Spare Jaws	To suit	Order Code KEN-567	Price/1 THB
Straight	165 - 300mm	-3820K	462.00
Angled		-3840K	462.00