KENNEDY QUALITY INDUSTRIAL TOOLING 'Hi-Grip' Screwdrivers

Designed for maximum grip under load application. The red moulded cushion grip gives optimum operator comfort. Ideal for assembly work. Tough alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. **DIN ISO 2380/8764.**

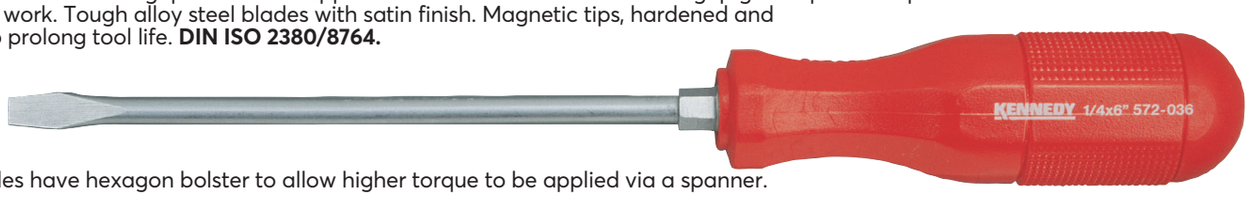

*Flat blades have hexagon bolster to allow higher torque to be applied via a spanner.

Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 THB
No.0	75mm	35g	-0000K	70.00
No.1	75mm	75g	-0010K	130.00
No.2	100mm	110g	-0020K	167.00
No.3	150mm	170g	-0030K	232.00
No.2	Stubby	65g	-0120K	122.00

TX

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping potentially damaging the components.



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 THB
T6	75mm	40g	-6060K	120.00
T7	75mm	40g	-6070K	120.00
T8	75mm	40g	-6080K	112.00
T9	75mm	40g	-6090K	112.00
T10	75mm	40g	-6100K	112.00
T15	100mm	80g	-6150K	134.00
T20	100mm	800g	-6200K	134.00
T25	100mm	110g	-6250K	167.00
T30	100mm	110g	-6300K	167.00

Set Contents (mm):
Supplied in clear plastic wallet.

11 PIECES

TX: T6 x 75, T7 x 75, T8 x 75, T9 x 75, T10 x 75, T15 x 100, T20 x 100, T25 x 100, T27 x 100, T30 x 100 and T40 x 100.



Weight each	Order Code KEN-572	Price/1 THB
830g	-6450K	1433.00

PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 THB
No.1	75mm	75g	-0210K	134.00
No.2	100mm	110g	-0220K	170.00
No.3	150mm	170g	-0230K	224.00

Set Contents (mm):
Supplied in clear plastic wallet.

8 PIECES

CROSS POINT: No.1 x 75, No.2 stubby, No.2 x 100 No.3 x 150.
FLARED: 6.5 stubby, 6.5 x 100, 6.5 x 150 10.0 x 250.

Set Contents (mm):
Supplied in clear plastic wallet.

FLARED: 6.5 stubby, 6.5 x 100, 6.5 x 150, 8.0 x 200 and 10.0 x 250.
CROSS POINT: No.2 x 100 No.3 x 150.

PZ: No.1 x 75, No.2 x 100 No.3 x 150. No.1 x 75, No.2 stubby,

12 PIECES



Number of Pieces	Weight each	Order Code KEN-572	Price/1 THB
8	1.05kg	-9870K	1481.00
12	1.58kg	-0490K	2093.00

Flared Tip, Round Blade

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.**



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 THB
6.5mm	Stubby	65g	-0320K	120.00
6.5mm	100mm	115g	-0340K	192.00
6.5mm	150mm	125g	-0360K	206.00
8.0mm	200mm	195g	-0380K	273.00
10.0mm	250mm	265g	-0400K	357.00

Cabinet Screwdrivers

Traditional design cabinet screwdrivers with matt grey high impact plastic handles to ensure a firm yet comfortable grip allowing constant use, giving maximum torque. Chrome alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life.
DIN ISO 2380/8764.

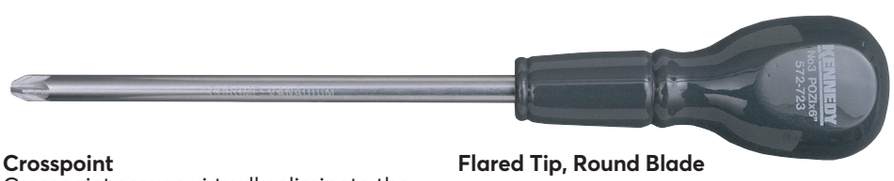

Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. **DIN ISO 8764.**



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 THB
No.1	75mm	65g	-7010K	203.00
No.2	100mm	90g	-7020K	203.00
No.3	150mm	165g	-7030K	222.00

Flared Tip, Round Blade



Tip Size	Blade Length	Order Code KEN-572	Price/1 THB
5.5mm	75mm	-7330K	102.00
6.5mm	150mm	-7360K	135.00

© 2022

OS21_APAC_TH_0475.indd 1 07/12/2021 10:25