



1" Drive The ultimate for high torque hand applications. Designed to give strength and reliability under heavy loads. Used extensively in heavy plant, rail, shipyard and oil rig industries.



Lever Type Steel Handle with Extension



Sliding 'T'-Handle with Extension

Lever Type Steel Handle

1 Basic wrench with satin finish. Fitted with spring loaded ball bearing socket retainer.




Overall Length	Number of Teeth	Weight each	Order Code KEN-582	Price/1 THB
740mm	40	5.40kg	-8980K	13241.00

Description	Order Code KEN-582	Price/1 THB
Ratchet Repair Kit	-8990K	3728.00

Sliding 'T' Handle

1 Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.

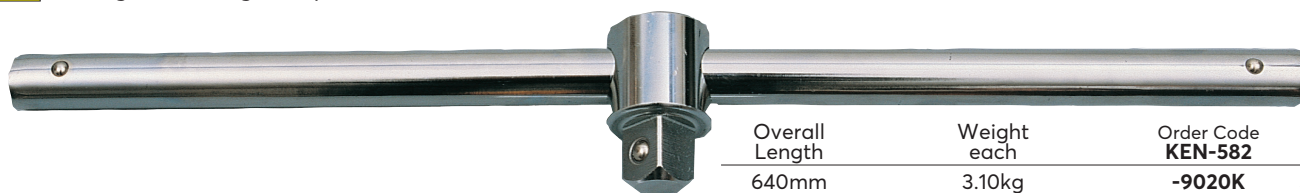

Overall Length	Weight each	Order Code KEN-582	Price/1 THB
640mm	3.10kg	-9020K	5660.00

Extensions

1 Manufactured from high quality chrome vanadium with a fully polished finish. Knurled 'finger grip'.



Overall Length	Weight each	Order Code KEN-582	Price/1 THB
200mm	1.00kg	-9040K	2720.00
400mm	1.80kg	-9060K	4442.00

Bi-Hexagon Standard Sockets

1 Bi-hexagon. (12 point). This range of 1" (25mm) series sockets is the ultimate for high torque hand applications. The Bi-hexagon design gives strength and reliability under heavy loads. Used extensively in heavy plant, rail, shipyard and oil rig industries. The 12 point bi-hexagon side drive design gives a higher torque than normal sockets. Made from chrome vanadium and fully chrome plated with a mirror finish and aluminium-free. Chamfered leading edge ensures easy fastener location.



Type	Size	Overall Length	Weight each	Order Code KEN-582	Price/1 THB
Metric	36mm	65	280g	-9200K	1197.00
	41mm	65	330g	-9210K	1208.00
	46mm	70	360g	-9220K	2405.00
	50mm	75	360g	-9230K	2405.00
	55mm	80	400g	-9240K	2562.00
	60mm	85	420g	-9250K	2646.00
	65mm	90	450g	-9260K	2951.00
	70mm	100	480g	-9270K	3098.00
AF	75mm	100	520g	-9280K	3875.00
	80mm	110	550g	-9290K	4305.00
	1 1/2"	70	300g	-9360K	5796.00
	2"	70	360g	-9400K	5513.00
	2 1/4"	85	400g	-9420K	5954.00
	2 3/8"	85	400g	-9430K	7056.00
	2 5/8"	85	400g	-9440K	7602.00
2 3/4"	85	400g	-9450K	8873.00	