


Impact Sockets - 1/2" Square Drive

Hand Tools

KENNEDY Chrome Molybdenum Impact Sockets

Manufactured from high quality chrome molybdenum steel. Black oxidised finish with permanent laser etched markings.

1/2" Drive Metric, Standard Length, 6-Point
Conform to: DIN 3129.

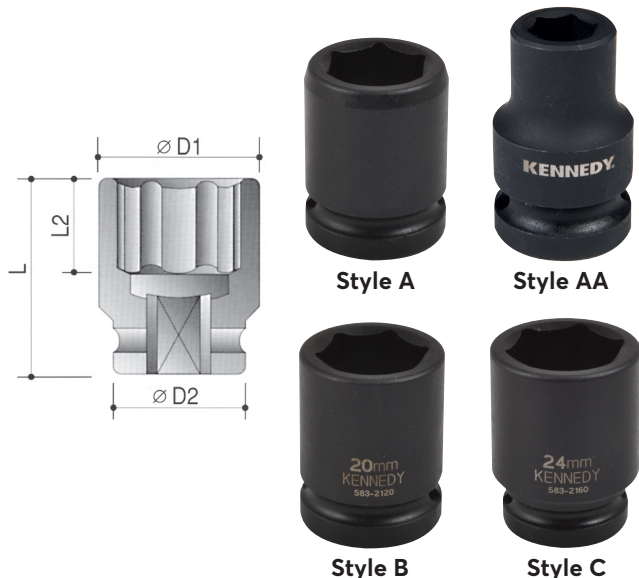

Socket (mm)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 THB
		D2	D1	L2	L			
9	AA	24.0	16.0	12.0	38.0	60g	-8535K	126.00
10	AA	24.0	17.5	12.0	38.0	90g	-8536K	126.00
11	A	25.0	18.7	12.0	38.0	95g	-8537K	0.01
12	A	25.0	20.0	12.0	38.0	100g	-2040K	126.00
13	AA	24.0	21.0	14.0	38.0	67g	-8539K	126.00
14	A	25.0	22.5	12.0	38.0	100g	-2060K	209.00
15	A	30.0	23.7	12.0	38.0	140g	-8541K	0.01
16	A	30.0	25.0	12.0	38.0	140g	-8542K	0.01
17	B	26.0	26.0	15.0	38.0	90g	-8543K	133.00
18	A	30.0	27.5	13.0	38.0	140g	-8544K	0.01
19	B	28.0	28.0	15.0	38.0	100g	-8545K	NA
20	B	30.0	30.0	13.0	38.0	140g	-8546K	0.01
21	B	30.0	30.0	15.0	38.0	117g	-8547K	NA
22	C	30.0	32.0	13.0	38.0	140g	-8548K	0.01
23	C	30.0	32.0	13.0	38.0	140g	-8549K	0.01
24	C	30.0	34.0	16.0	38.0	135g	-8550K	NA
26	C	30.0	38.0	22.0	50.0	200g	-8551K	0.01
27	C	30.0	38.0	18.0	42.0	166g	-8552K	259.00
28	C	30.0	40.0	18.0	42.0	191g	-8553K	NA
30	C	30.0	42.0	18.0	42.0	192g	-8554K	319.00
32	C	30.0	44.0	28.0	50.0	250g	-8555K	0.01
36	C	30.0	49.0	22.0	48.0	275g	-8556K	490.00

1/2" Drive Inch Size, Standard Length, 6-Point
Conform to: SAE, USA Federal Standard GGG-W-660A.

Socket (inch)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 THB
		D2	D1	L2	L			
3/8"	A	22.0	16.0	12.0	38.0	70g	-2270K	296.00
7/16"	A	22.0	18.0	12.0	38.0	70g	-8679K	0.01
1/2"	A	22.0	20.0	12.0	38.0	70g	-8680K	0.01
9/16"	AA	24.0	22.0	12.0	38.0	68g	-8681K	160.00
5/8"	B	24.0	24.0	15.0	38.0	72g	-8682K	NA
11/16"	B	26.0	26.0	15.0	38.0	88g	-8683K	179.00
3/4"	B	28.0	28.0	15.0	38.0	100g	-8684K	193.00
13/16"	B	30.0	30.0	15.0	38.0	118g	-8685K	205.00
7/8"	C	30.0	32.0	15.0	38.0	127g	-8686K	229.00
15/16"	B	34.0	34.0	13.0	38.0	170g	-8687K	0.01
1"	B	36.0	36.0	14.0	38.0	190g	-8688K	0.01
1 1/16"	C	30.0	38.0	19.0	42.0	166g	-8689K	298.00
1 1/8"	C	30.0	42.0	18.0	42.0	192g	-8690K	321.00
1 3/16"	C	38.0	42.0	16.0	40.0	255g	-8691K	0.01
1 1/4"	C	30.0	44.0	19.0	44.0	218g	-8692K	343.00

1/2" Drive BSW Size, Standard Length, 6-Point
Conform to: SAE, USA Federal Standard GGG-W-660A.

Socket (BSW)	Style	Dimensions (mm)				Weight each	Order Code KEN-583	Price/1 THB
		D2	D1	L2	L			
5/16"	A	30.0	25.0	12.0	38.0	140g	-2510K	735.00
3/8"	A	30.0	27.5	13.0	38.0	140g	-2520K	735.00
7/16"	B	30.0	30.0	13.0	38.0	140g	-2530K	NA
1/2"	C	30.0	35.0	20.0	45.0	190g	-2540K	NA
9/16"	C	30.0	38.0	22.0	50.0	210g	-2550K	NA
5/8"	C	30.0	40.0	22.0	50.0	305g	-2560K	NA
11/16"	C	30.0	44.0	28.0	50.0	305g	-2570K	NA
3/4"	C	30.0	44.0	28.0	50.0	305g	-2580K	1124.00

Impact Socket Sets

The sockets are manufactured from the highest quality chrome molybdenum steel which is clearly laser etched with the size for easy and rapid identification. Tough, impact-resistant carry case. Conforms to: **Metric DIN 3129, Inch SAE USA Federal Standard GGG-W-660A.**

9 Piece Set - Metric

Standard length: 10, 12, 13, 14, 17, 19, 24, 27 and 30mm.



Weight each	Order Code KEN-583	Price/1 THB
1.70kg	-9210K	2174.00

18 Piece Set - Metric

Standard length: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 26, 27, 30 and 32mm.



Weight each	Order Code KEN-583	Price/1 THB
3.40kg	-9215K	3927.00