


ACTION CAN® Silicone Release Spray


SP-90
Superior non toxic lubricant. Low odour and non staining. Reduces friction and static. Wide operating temperature -50°C to 200°C. Protects against corrosion and oxidation. Cans printed in English, French and German suitable for supply in the EU.

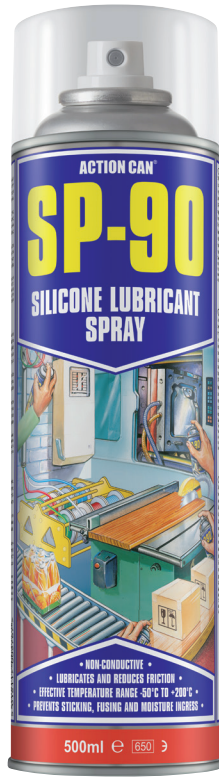

Size	Order Code	Price/1 THB
500ml	-9000K	515.00

Synthetic Lubricating Oil with PTFE

SL-90
Fully synthetic. Strong anti-fling properties. Wide operating temperature from -35°C to +200°C. Multi viscosity capability. Good metal to metal parts lubrication. Water, steam, acid and alkalis resistant. Corrosion inhibitor built-in. Clean and clear. Silicone- and CFC-free. Cans printed in English, French and German suitable for supply in EU.

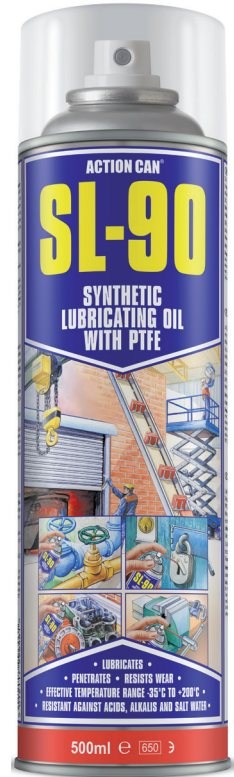

Size	Order Code	Price/1 THB
500ml	-8880K	419.00

Extreme Pressure Greases with PTFE

Resists abrasion, reduces friction and mechanical wear. Excellent shear resistance and good low temperature torque. Water, steam, acid and alkali resistant.

WG-90 - White Lithium EP Grease + PTFE
Suitable for most plastic components in delicate systems.

Operating temperature:
-18°C to +250°C.



Size	Order Code	Price/1 THB
500ml	-8330K	704.00

500 ml

KENNEDY® Air Tool Lubricant

Excellent air release quality, low foaming ability and resists clogging. Contains anti-rust and anti-wear additives. Extremely resistant to water absorption and can be mixed with all mineral oil based lubricants without draining the system. **ISO Grade VG22.**



Size	Order Code	Price/1 THB
	KEN-732	
	Poly Bottle	
500ml	-8000K	504.00
	Can	
5ltr	-8050K	3528.00