

MATLOCK**Webbing Slings**

High strength to weight ratio, light to handle and easy to use. Shock absorbing construction and wide load bearing area produce a secure grip and eliminate damage to the load. All types are made from oil and acid resistant polyester, treated with a wear resistant impregnation. All sizes are colour coded to indicate 'SWL' (safe working load), rating and marked with traceability code. These ratings are for a straight line pull only. Other variations of pull are shown below along with the relevant 'SWL'.

Flat Slings

Flat Slings with reinforced eye at each end. Made to BS EN 1492:1 - 2000.




Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942	Price/1 THB
Simplex Type - Single Thickness				
2	60	1,000	-5010K	567.00
	120	2,000	-5020K	1334.00
	180	3,000	-5030K	2058.00
3	60	1,000	-5110K	798.00
	120	2,000	-5120K	1670.00
	180	3,000	-5130K	1944.00
4	60	1,000	-5210K	945.00
	120	2,000	-5220K	1850.00
	180	3,000	-5230K	NA
Duplex Type - Double Thickness				
2	30	1,000	-5510K	462.00
	60	2,000	-5520K	759.00
	90	3,000	-5530K	1078.00
	120	4,000	-5540K	1750.00
	150	5,000	-5550K	2220.00
	240	8,000	-5580K	3070.00
3	300	10,000	-5590K	3510.00
	30	1,000	-5610K	759.00
	60	2,000	-5620K	1111.00
	90	3,000	-5630K	1518.00
	120	4,000	-5640K	1458.00
	150	5,000	-5650K	2200.00
4	30	1,000	-5710K	540.00
	60	2,000	-5720K	1422.00
	90	3,000	-5730K	1568.00
	120	4,000	-5740K	2028.00
	150	5,000	-5750K	2880.00
	300	10,000	-5790K	4216.00
6	30	1,000	-5810K	1287.00
	60	2,000	-5820K	1295.00
	90	3,000	-5830K	1960.00
	120	4,000	-5840K	2779.00
	150	5,000	-5850K	3252.00
	240	8,000	-5870K	4284.00
8	300	10,000	-5890K	4921.00
	30	1,000	-5900K	726.00
	60	2,000	-5920K	1111.00
	120	4,000	-5960K	2250.00
	150	6,000	-5970K	3690.00
	240	8,000	-5980K	5624.00
10	300	10,000	-5990K	6744.00
	30	1,000	-6020K	1320.00
	60	2,000	-6040K	2854.00
	120	4,000	-6060K	4570.00
	150	6,000	-6080K	6507.00
	240	8,000	-6090K	9840.00

Webbing Slings**Safe Working Loads**

Straight Line



Choker



Basket



Basket 90°*



Basket 120°*

1,000kg	800kg	2,000kg	1,400kg	1,000kg
2,000kg	1,600kg	4,000kg	2,800kg	2,000kg
3,000kg	2,400kg	6,000kg	4,200kg	3,000kg
4,000kg	3,200kg	8,000kg	5,600kg	4,000kg
5,000kg	4,000kg	10,000kg	7,000kg	5,000kg

*Angle between sling legs.

Endless Round Slings

Made to BS EN 1492:2 - 2000.


Supplied with Certificate of Conformity



Working Length (M)	Width (mm)	'SWL' (kg)	Order Code MTL-942	Price/1 THB
0.5	45	1,000	-1960K	311.00
	50	2,000	-1970K	470.00
	60	3,000	-1980K	689.00
	70	4,000	-1990K	713.00
	80	5,000	-2000K	826.00
1	45	1,000	-2010K	431.00
	50	2,000	-2020K	538.00
	60	3,000	-2030K	702.00
	70	4,000	-2040K	875.00
	80	5,000	-2050K	920.00
1.5	45	1,000	-2060K	767.00
	50	2,000	-2070K	777.00
	60	3,000	-2080K	1023.00
	70	4,000	-2090K	1111.00
	80	5,000	-2100K	1595.00
2.0	45	1,000	-2110K	538.00
	50	2,000	-2120K	896.00
	60	3,000	-2130K	1310.00
	70	4,000	-2140K	1449.00
	80	5,000	-2150K	1859.00
2.5	45	1,000	-2160K	740.00
	50	2,000	-2170K	1092.00
	60	3,000	-2180K	1480.00
	70	4,000	-2190K	2040.00
	80	5,000	-2200K	2216.00
3.0	45	1,000	-2210K	886.00
	50	2,000	-2220K	1231.00
	60	3,000	-2230K	1829.00
	70	4,000	-2240K	1910.00
	80	5,000	-2250K	2499.00
10.0	80	-	-2290K	4680.00

Warrior™ Wear Sleeve**BDV1592**

Guards against wear and tear of straps on sharp load edges, thread the load strap through the wear sleeve and position on load edges.

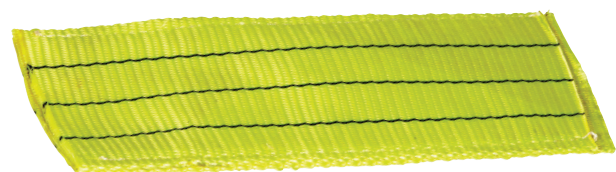

Product Number	Length	Order Code MTL-942	Price/1 THB
BDV1592	330mm	-6100K	323.00