

6A257



38X511


Wire Mesh Slings

- Galvanized high-tensile steel mesh
- Use in basket or choker hitch
- Terminal thickness 1/2"

Use Roughneck 10-ga. wire mesh slings in metalworking or other industries where loads are abrasive, hot, or tend to cut web slings. Withstand temperatures to 550°F. Plated fittings fit most crane hooks.



Width	Length	Terminal Dia.	Choker Hitch Cap.	Basket Hitch Capacity	TRIANGLE AND CHOKER - TYPE 1		TRIANGLE AND CHOKER - TYPE 2	
					Item No.		Item No.	
2 in	4 ft	2 in	2,300 lb	4,600 lb	38X501		38X511	
	6 ft	2 in	2,300 lb	4,600 lb	38X502		38X512	
	8 ft	2 in	2,300 lb	4,600 lb	38X503		38X513	
	10 ft	2 in	2,300 lb	4,600 lb	38X493		38X504	
3 in	4 ft	2 1/4 in	3,500 lb	7,000 lb	38X521		38X531	
	6 ft	2 1/4 in	3,500 lb	7,000 lb	38X522		38X532	
	8 ft	2 1/4 in	3,500 lb	7,000 lb	38X523		38X533	
	10 ft	2 1/4 in	3,500 lb	7,000 lb	38X514		38X524	
4 in	4 ft	3 in	4,800 lb	9,600 lb	38X541		38X549	
	6 ft	3 in	4,800 lb	9,600 lb	6A257		38X550	
	8 ft	3 in	4,800 lb	9,600 lb	6A258		38X551	
	10 ft	3 in	4,800 lb	9,600 lb	38X534		38X542	
6 in	4 ft	3 1/2 in	7,200 lb	14,400 lb	38X559		38X569	
	6 ft	3 1/2 in	7,200 lb	14,400 lb	38X560		38X570	
	8 ft	3 1/2 in	7,200 lb	14,400 lb	38X561		38X571	
	10 ft	3 1/2 in	7,200 lb	14,400 lb	38X552		38X562	
8 in	4 ft	4 1/2 in	9,600 lb	19,200 lb	38X578		38X588	
	6 ft	4 1/2 in	9,600 lb	19,200 lb	38X579		38X589	
	8 ft	4 1/2 in	9,600 lb	19,200 lb	38X580		38X590	
	10 ft	4 1/2 in	9,600 lb	19,200 lb	38X572		38X581	

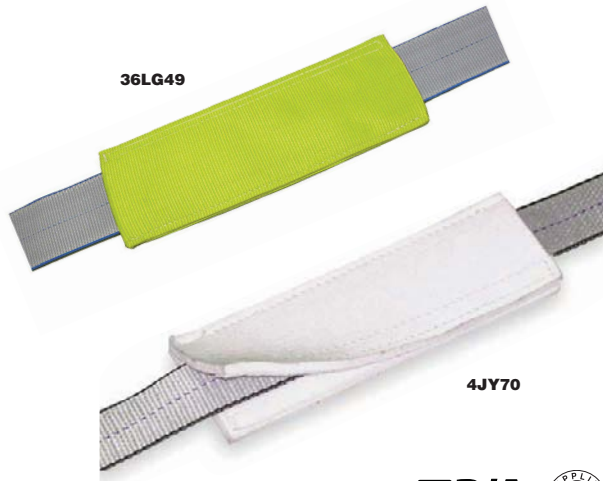

36LG49

4JY70

Wear Pads

Help protect against property damage and personal injury. Attach easily with hook-and-loop fastener closures and move to other slings, as needed. Sewn construction. Color coded by pad thickness/material construction.


Thickness	For Sling Width	L	Material	Color	Brand	Item No.
3/8 in	2 in	12 in	Pukka	Yellow	Lift-All	4JY68
	4 in	12 in	Pukka	Yellow	Lift-All	4JY69
	12 in	24 in	Polyester	Yellow	B/A Products Co.	12M171
1/2 in	1 in	1 ft	Nylon	Yellow	Lift-All	36LG49
	2 in	1 ft	Nylon	Yellow	Lift-All	36LG51
3/4 in	2 in	12 in	Pukka	White	Lift-All	4JY70
	4 in	12 in	Pukka	White	Lift-All	4JY71




THREE TYPES OF USES




VERTICAL



CHOKER



BASKET

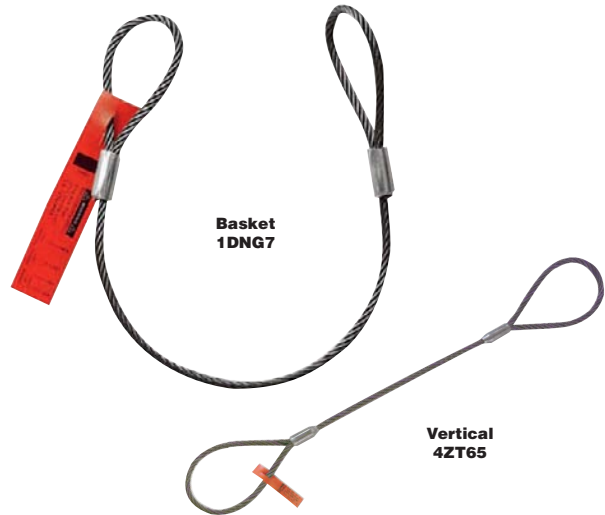

Basket
1DNG7

Vertical
4ZT65

Wire Rope Slings



Eye and Eye slings constructed of 6 x 19 IWRC (Independent Wire Rope Core) class wire rope. Operating temperature rating: -60° to 400°F.

Rope Dia.	Vertical Hitch Cap.	Choker Hitch Cap.	Basket Hitch Cap.	L	DAYTON Item No.	LIFT-ALL Item No.
1/4 in	1,300 lb	960 lb	2,600 lb	2 ft.	1DNG7	2RU71
				3 ft.	1DNG8	2RU72
				4 ft.	1DND9	1A591
				2 ft.	1DNG9	2RU73
3/8 in	2,800 lb	2,200 lb	5,800 lb	3 ft.	1DNH2	2RU75
				4 ft.	1DNF6	4ZT78
				6 ft.	1DNE1	1A592
				8 ft.	1DNF7	4ZT79
1/2 in	5,000 lb	3,800 lb	10,200 lb	10 ft.	1DNF5	4ZT77
				4 ft.	1DNE8	4ZT69
				5 ft.	—	38Z444 *
				6 ft.	1DNE2	1A593
3/4 in	7,800 lb	5,800 lb	15,600 lb	8 ft.	1DNE3	1A594
				10 ft.	1DNE6	4ZT67
				11 ft.	—	38Z431 *
				12 ft.	1DNE7	4ZT68
1 in	19,600 lb	14,400 lb	40,000 lb	20 ft.	1DNH1	2RU74
				4 ft.	1DNG1	4ZT82
				6 ft.	1DNG2	4ZT83
				8 ft.	1DNG3	4ZT84
3/4 in	11,200 lb	8,200 lb	22,000 lb	10 ft.	1DNF8	4ZT80
				5 ft.	—	38Z796 *
				12 ft.	1DNF9	4ZT81
				20 ft.	—	2RU76
1 in	19,600 lb	14,400 lb	40,000 lb	4 ft.	1DNF2	4ZT74
				6 ft.	1DNF3	4ZT75
				8 ft.	1DNF4	4ZT76
				10 ft.	1DNE9	4ZT72
3/4 in	11,200 lb	8,200 lb	22,000 lb	10 ft.	—	38Z651 *
				12 ft.	1DNF1	4ZT73
				20 ft.	1DNH4	2RU77
				8 ft.	—	38Z593 *
1 in	19,600 lb	14,400 lb	40,000 lb	10 ft.	1DNE4	4ZT65
				12 ft.	—	38Z577 *
				12 ft.	1DNE5	4ZT66
				20 ft.	1DNH5	2RU78
3/4 in	11,200 lb	8,200 lb	22,000 lb	10 ft.	—	38Z587 *
				12 ft.	—	38Z587 *

* Made using imported wire rope.