


1-800-GRAINGER (472-4643)

Configurable Cantilevered Rolling Ladders



- 300-lb. load rating
- Clearance height to floor is 2" less than platform height
- 50° climbing angle
- Unsupported and supported cantilever platforms are available in 20", 30" and 40" depths
- Meet OSHA and ANSI Standards

Design a customized cantilever platform by selecting a model based on environment and application requirements. 5" x 2" polyurethane swivel casters have total-lock brakes. Steps are 24"W. Unsupported models have 30"W overall width; supported models have 41" overall width. Guardrails are 42"H, rectangular tubing frame is 1" x 2", and tubing handrails are 1½" dia. Yellow powder-coat finish. Cantilever Ladder Support Conversion Kits convert unsupported cantilever to supported cantilever.

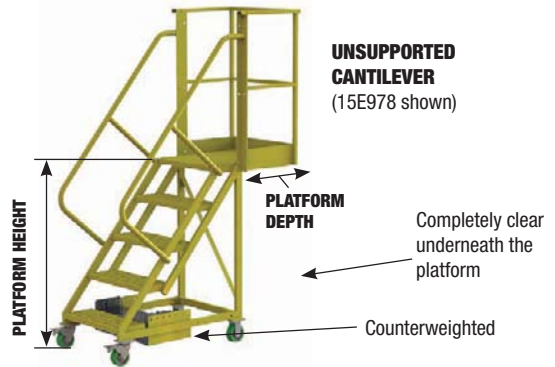

UNSUPPORTED CANTILEVER
(15E978 shown)

No. of Steps	Platform Height	Platform Depth	Base Depth	PERFORATED Item No.	SERRATED Item No.
Supported Cantilever					
5	50 in	20 in	64 in	15E948	15E953
	50 in	30 in	74 in	15E958	15E963
	50 in	40 in	84 in	15E968	15E973
6	60 in	20 in	72 in	15E949	15E954
	60 in	30 in	82 in	15E959	15E964
	60 in	40 in	92 in	15E969	15E974
7	70 in	20 in	81 in	15E950	15E955
	70 in	30 in	91 in	15E960	15E965
	70 in	40 in	101 in	15E970	15E975
8	80 in	20 in	89 in	15E951	15E956
	80 in	30 in	99 in	15E961	15E966
	80 in	40 in	109 in	15E971	15E976
9	90 in	20 in	97 in	15E952	15E957
	90 in	30 in	107 in	15E962	15E967
	90 in	40 in	117 in	15E972	15E977

No. of Steps	Platform Height	Platform Depth	Base Depth	PERFORATED Item No.	SERRATED Item No.
Unsupported Cantilever					
5	50 in	20 in	64 in	15E978	15E983
	50 in	30 in	74 in	15E988	15E993
	50 in	40 in	84 in	15E998	15F004
6	60 in	20 in	72 in	15E979	15E984
	60 in	30 in	82 in	15E989	15E994
	60 in	40 in	92 in	15E999	15F005
7	70 in	20 in	81 in	15E980	15E985
	70 in	30 in	91 in	15E990	15E995
	70 in	40 in	101 in	15F001	15F006
8	80 in	20 in	89 in	15E981	15E986
	80 in	30 in	99 in	15E991	15E996
	80 in	40 in	109 in	15F002	15F007
9	90 in	20 in	97 in	15E982	15E987
	90 in	30 in	107 in	15E992	15E997
	90 in	40 in	117 in	15F003	15F008



Description	Item No.
Cantilever Ladder Support Conversion Kits	
20" Cantilever Length	15F009
30" Cantilever Length	15F010
40" Cantilever Length	15F011


U-Design Configurable Rooftop Platforms



- 500-lb. load rating
- Aluminum construction
- 1" x 2" rectangular tube construction
- Meet OSHA and ANSI Standards
- Grip strut tread

Easily create safe access over pipes and other rooftop obstacles. Special support feed distributes weight to prevent damage to roof membranes. Combine up to a total of 120" uninhibited span clearance length. A ladder support leg is required for spans greater than 120".

No. of Steps	Vert. Clearance	Overall Height	Top Step Height	Depth	Step Width	Item No.
50° Incline						
2	17 ½ in	62 in	20 in	9 ½ in	36 in	29RJ17
3	27 ½ in	72 in	30 in	9 ½ in	36 in	29RJ18
4	37 ½ in	82 in	40 in	9 ½ in	36 in	29RJ19
5	47 ½ in	92 in	50 in	9 ½ in	36 in	29RJ20
6	57 ½ in	102 in	60 in	9 ½ in	36 in	29RJ21
90° Incline						
2	17 ½ in	62 in	20 in	1 ½ in	24 in	29RJ22
3	27 ½ in	72 in	30 in	1 ½ in	24 in	29RJ23
4	37 ½ in	82 in	40 in	1 ½ in	24 in	29RJ24
5	47 ½ in	92 in	50 in	1 ½ in	24 in	29RJ25
6	57 ½ in	102 in	60 in	1 ½ in	24 in	29RJ26
Vert. Clearance	Overall Height	H	Platform Dim.		Item No.	
Turn Platforms			W	L		
17 ½ in	62 in	20 in	36 in	40 in	29RJ33	
27 ½ in	72 in	30 in	36 in	40 in	29RJ34	
37 ½ in	82 in	40 in	36 in	40 in	29RJ35	
47 ½ in	92 in	50 in	36 in	40 in	29RJ36	
57 ½ in	102 in	60 in	36 in	40 in	29RJ37	
Bridge Span						
		36 in	38 in	40 in	29RJ32	

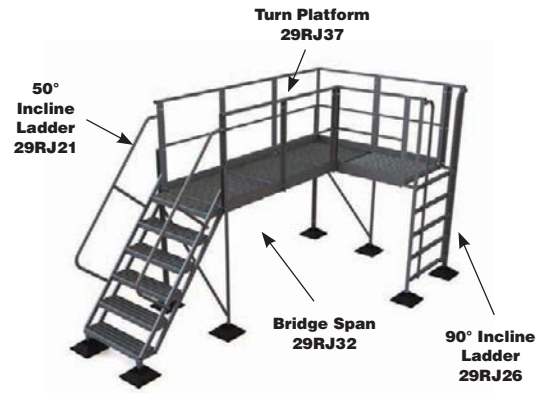

Description	Item No.
Support Legs	
For Use With 20" Platform Height Ladder	29RJ27
For Use With 30" Platform Height Ladder	29RJ28
For Use With 40" Platform Height Ladder	29RJ29
For Use With 50" Platform Height Ladder	29RJ30
For Use With 60" Platform Height Ladder	29RJ31
Bridge Span Enclosure	
Kit to Enclose Any Walkway Opening	29RJ38



Configurable Multi-Platform Access Component Systems

- 500-lb. load capacity
- Aluminum construction
- Clearance height is 4" less than platform height
- Assembly hardware included
- ¾" floor mounting hardware not included

Designed for use with stepladders or extension ladders. Meet OSHA and ANSI Standards.

Ladders—45° climbing angle. Steps are 24"W x 9½"D and include serrated step tread.

Ladder Handrails—Feature 36½" handrail height.

No. of Steps	Overall Height	Overall Width	Item No.
Ladders			
1	18 in	29 in	53JE68
2	27 in	29 in	53JE69
3	36 in	29 in	53JE70
4	45 in	29 in	53JE71
5	54 in	29 in	53JE72
6	63 in	29 in	53JE73
7	72 in	29 in	53JE74
8	81 in	29 in	53JE75

For Use With Ladder Handrails	Item No.
1-Step Ladder	53JE76
2-Step Ladder	53JE77
3-Step Ladder	53JE78
4-Step Ladder	53JE79
5-Step Ladder	53JE80
6-Step Ladder	53JE81
7-Step Ladder	53JE82
8-Step Ladder	53JE83

Overall Height	Platform Width	Platform Length	Item No.
Platform Units			
4 in	30 in	30 in	53JE92
4 in	30 in	60 in	53JE93
4 in	30 in	120 in	53JE94
Description		Item No.	
Platform Guardrails			
30 inL		53JE95	
60 inL		53JE96	

Description	Item No.
Platform Support Legs	
18 inH	53JE84
27 inH	53JE85
36 inH	53JE86
45 inH	53JE87
54 inH	53JE88
63 inH	53JE89
72 inH	53JE90
81 inH	53JE91

