


Dayton

LiftAll
PRODUCTS FOR BETTER LIFTING

Polyester Round Slings

- Color-coded for quick identification
- Sling flattens against load to grip tightly
- Only 3% stretch for better load control

Load-bearing yarns protect from UV degradation and slings are resistant to grease and most acids. Wear points of all endless-style slings shift with each use for maximum sling life. Temperature range: -50° to 200°F. All load fibers protected by two woven covers. Eye and eye style has an additional wear-resistant cover to extend sling life. Remove sling from service when red striped white core yarns are exposed. Meet or exceed all OSHA and ASME B30.9 Standards.




L	Eye Length	Vertical Load	Choker Hitch Cap.	Basket Hitch Capacity	Color Code	DAYTON		LIFT-ALL		
						Width Under Load	Item No.	Width Under Load	Item No.	
Endless	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK3	1 in	4A767	
3 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL4	1 3/4 in	3KN79	
3 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN3	1 3/4 in	2RU55	
4 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK5	1 in	3KN75	
4 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL6	1 3/4 in	3KN80	
4 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN4	1 3/4 in	3KN81	
6 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK7	1 in	3KN76	
6 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL7	1 3/4 in	4A768	
6 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN5	1 3/4 in	3KN82	
6 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP1	2 in	2RU58	
6 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP6	2 3/4 in	2RU61	
8 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJK9	1 in	3KN77	
8 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL8	1 3/4 in	4A769	
8 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN6	1 3/4 in	3KN83	
8 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP2	2 in	3KN73	
8 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP7	2 3/4 in	2RU62	
10 ft.	—	2600 lb.	2,100 lb	5,200 lb	Purple	1 1/2 in	2MJL2	1 in	2RU52	
10 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJL9	1 3/4 in	3KN78	
10 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN7	1 3/4 in	4A770	
10 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP3	2 in	3KN72	
10 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP8	2 3/4 in	3KN74	
12 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJN1	1 3/4 in	2RU53	
12 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN8	1 3/4 in	2RU56	
12 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP4	2 in	2RU59	
12 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJP9	2 3/4 in	2RU63	
20 ft.	—	5300 lb.	4,200 lb	10,600 lb	Green	1 1/2 in	2MJN2	1 3/4 in	2RU54	
20 ft.	—	8400 lb.	6,700 lb	16,800 lb	Yellow	1 1/2 in	2MJN9	1 3/4 in	2RU57	
20 ft.	—	13,200 lb.	10,600 lb	26,400 lb	Red	2 1/4 in	2MJP5	2 in	2RU60	
20 ft.	—	21,200 lb.	17,000 lb	42,400 lb	Blue	3 in	2MJR1	2 3/4 in	2RU64	
Eye and Eye	4 ft.	10 in	2600 lb.	2,100 lb	5,200 lb	Purple	2 1/4 in	2MJR2	2 1/4 in	2RU65
4 ft.	10 in	5300 lb.	4,200 lb	10,600 lb	Green	2 1/4 in	2MJR4	2 1/2 in	2RU67	
4 ft.	12 in	8400 lb.	6,700 lb	16,800 lb	Yellow	2 1/2 in	2MJR6	2 1/2 in	2RU69	
6 ft.	10 in	2600 lb.	2,100 lb	5,200 lb	Purple	2 1/4 in	2MJR3	2 1/4 in	2RU66	
6 ft.	10 in	5300 lb.	4,200 lb	10,600 lb	Green	2 1/4 in	2MJR5	2 1/2 in	2RU68	
6 ft.	12 in	8400 lb.	6,700 lb	16,800 lb	Yellow	2 1/2 in	2MJR7	2 1/2 in	2RU70	



Poly Web Slings

- Woven surface yarns cover each side and carry a portion of the load
- Longitudinal core yarns carry the majority of load
- Red core warning yarns indicate damage
- Tuff-Tag provides serial numbered identification for traceability

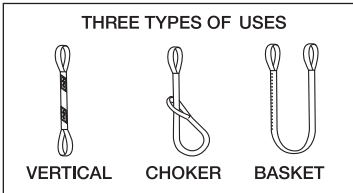

LiftAll
PRODUCTS FOR BETTER LIFTING

Surface yarns are connected side to side to protect core yarns, but also position surface and tensile yarns to work together to support the load. Meet or exceed all OSHA and ASME B30.9 Standards.

Endless-Type 5—Versatile slings economically priced for use in all three types of hitches: vertical, choker, and basket. Spread sling legs for improved load balance. Sling rotates to minimize wear.

Flat Eye and Eye-Type 3—Popular slings for use in all three types of hitches: vertical, basket, and choker.

Easier to remove from beneath the load than sling Types 1, 2, and 4.

Twisted Eye and Eye-Type 4—Similar to Type 3 except eyes are turned 90° and nest easily on the crane hook.

Universal Link-Type U—Helps extend sling life by protecting webbing from abrasion on rough crane hooks. Features Unilink fitting with Web-Trap on each end for use in three hitch types. Unilinks allow choking from either end to help vary wear points.

Width	Length	Vertical Hitch Cap.	Choker Hitch Cap.	Basket Hitch Cap.	Polyester Item No.	Tuff-Edge Polyester Item No.				
1 in	2 ft	3,200 lb	2,500 lb	6,400 lb	38U637	38T668				
	4 ft				38U640	4ZV42				
	5 ft				38U641	38T670				
	6 ft				38U642	1A595				
	8 ft				38U644	4ZV43				
	9 ft				38U645	38T672				
	10 ft				38U627	9U386				
	12 ft				38U629	8WPP4				
	13 ft				38U630	38T661				
	14 ft				38U631	38T662				
	16 ft				38U633	38T664				
	17 ft				38U634	38T665				
	18 ft				38U635	38T666				
	20 ft				38U638	38T669				
	2 in				2 ft	6,400 lb	5,000 lb	12,800 lb	38U656	38T681
					4 ft				38U659	4ZV46
5 ft		38U660	38T684							
6 ft		38U661	1A596							
8 ft		38U663	38T686							
9 ft		38U664	38T687							
10 ft		38U646	4ZV44							
12 ft		38U648	4ZV45							
13 ft		38U649	38T674							
14 ft		38U650	38T675							
16 ft		38U652	38T677							
17 ft		38U653	38T678							
18 ft		38U654	38T679							
20 ft		38U657	38T682							
3 in		4 ft	8,800 lb	7,040 lb	17,600 lb				38U677	38T701
		5 ft							38U678	38T702
	6 ft	38U679				38T703				
	8 ft	38U681				38T705				
	9 ft	38U682				38T706				
	10 ft	38U665				38T688				
	12 ft	38U667				38T690				
	13 ft	38U668				38T691				
	14 ft	38U669				38T692				
	16 ft	38U671				38T694				
	17 ft	38U672				38T695				
	18 ft	38U673				38T696				
	20 ft	38U675				38T698				

Width	Length	Vertical Hitch Cap.	Choker Hitch Cap.	Basket Hitch Cap.	Polyester Item No.	Tuff-Edge Polyester Item No.
4 in	4 ft	11,500 lb	9,200 lb	23,000 lb	38U686	38T719
	5 ft				38U686	38T720
	6 ft				38U687	38T721
	8 ft				38U689	38T723
	9 ft				38U701	38T724
	10 ft				38U683	38T707
	12 ft				38U685	38T709
	13 ft				38U686	38T710
	14 ft				38U687	38T711
	16 ft				38U689	38T713
	17 ft				38U690	38T714
	6 in				4 ft	16,500 lb
5 ft		38U715	38T738			
6 ft		38U716	38T739			
8 ft		38U718	38T741			
9 ft		38U719	38T742			
10 ft		38U702	38T725			
12 ft		38U704	38T727			
13 ft		38U705	38T728			
14 ft		38U706	38T729			
16 ft		38U708	38T731			
17 ft		38U709	38T732			
Double-Ply		2 ft	6,200 lb	4,900 lb	12,400 lb	
	5 ft	38U734				38T424
	6 ft	38U735				38T425
	8 ft	38U737				38T427
	9 ft	38U738				38T428
	10 ft	38U720				38T412
	12 ft	38U722				38T414
	13 ft	38U723				38T415
	14 ft	38U724				38T416
	16 ft	38U726				38T418
	17 ft	38U727				38T419
	18 ft	38U728				38T420
20 ft	38U731	38T423				

CONTINUED