


1-800-GRAINGER (472-4643)

Garage Door Locking Components




Description	Finish	Brand	Item No.
Inside Slide Lock	Galvanized	American Garage Door Supply	5MVG8
Inside Lock Mechanism	Galvanized	American Garage Door Supply	5MVG9
Lift Handle	Zinc	American Garage Door Supply	5MVH4
Blank T-Handle For Use with Snap Locks	Chrome	—	1RBH8
Deadbolt Lock and Cylinder For Use with Slidable Locking Bar Locks	Aluminum	—	1XND2
Outside Locking T-Handle	Chrome	—	1XNC9

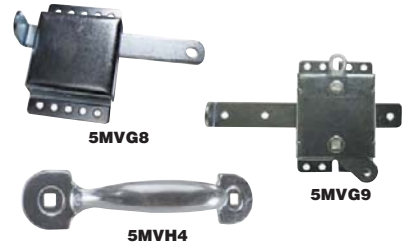

Vertical Lift Garage and Dock Doors


- U-shaped bottom astragal protects against the elements and provides a positive seal
- Heavy-duty 10-ball commercial rollers
- Hinges are 14-ga., hot-dipped galvanized steel
- Include all hardware needed to install



36R638

Noninsulated doors are embossed and ribbed steel. The exterior and interior are prefinished, then finish coated with baked-on polyester primer and acrylic. Insulated doors feature polystyrene insulation bonded between 26-ga. substrate. Provide incredible strength and thermal protection. Flush wood grain embossed panels.

Door Width	Opening Height	Opening Width	Minimum Height Clearance	Includes Windows	NONINSULATED		INSULATED	
					Item No.	Item No.	Item No.	Item No.
7 ft 8 in	10 ft	7 ft 6 in	21 ft	Yes	36R638	36R686		
8 ft	8 ft	7 ft 10 in	17 ft	No	36R664	36R713		
8 ft 2 in	8 ft	8 ft	17 ft	No	36R668	36R717		
8 ft 2 in	9 ft	8 ft	19 ft	No	36R669	36R718		
8 ft 2 in	10 ft	8 ft	21 ft	No	36R670	36R719		
9 ft 2 in	10 ft	9 ft	21 ft	Yes	36R654	36R703		

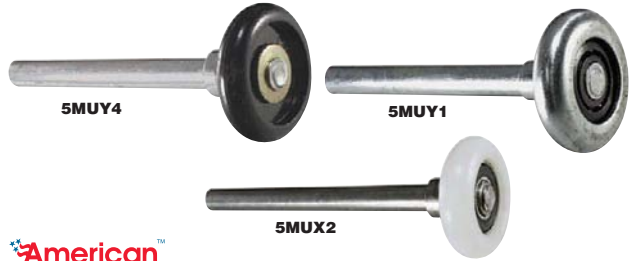

Garage Door Rollers

Roller Width/ Dia. (in.)	Shaft Length	Bearings	Item No.	Pkg. Qty.
Nylon				
2	4 in	—	5MU4	10
Roller				
1 3/4	4 in	Steel 10 Ball	5MU5	10
Steel				
2	4 1/2 in	Steel 10 Ball	5MU1	4
2	7 in	Steel 10 Ball	5MU2	4
2	9 in	Steel 10 Ball	5MU3	4
3	4 in	Steel 10 Ball	5MUX8	4
3	7 in	Steel 10 Ball	5MUX9	4
3	9 in	Steel 10 Ball	5MU0	4
For Harsh Conditions, Stainless Steel With UHMW Polyethylene Tire				
2	4 1/2 in	Precision Chrome Steel, Sealed	5MUX2	4
3	7 1/2 in	Stainless Steel Sealed	5MUX7	4
2 3/4	4 1/2 in	—	5MUX0	4

36R944



Garage and Dock Door Extension Springs

- Double-end loop style
- Sold in pkg. of 2


All extension springs include high-quality, black-coated spring wire and are rated for a minimum of 10,000 cycles on an appropriate door height and weight. Color-coded for easy identification.

Description	Item No.
Garage Door Extension Spring	
7 ft High Garage Doors - 25" to 42" Stretch	
80 lb Pull Per Pair	36R944
90 lb Pull Per Pair	36R945
100 lb Pull Per Pair	36R946
110 lb Pull Per Pair	36R947
120 lb Pull Per Pair	36R948
130 lb Pull Per Pair	36R949
140 lb Pull Per Pair	36R950
150 lb Pull Per Pair	36R951
160 lb Pull Per Pair	36R952
8 ft High Garage Doors - 27" to 48" Stretch	
80 lb Pull Per Pair	36R953
90 lb Pull Per Pair	36R954
100 lb Pull Per Pair	36R955
110 lb Pull Per Pair	36R956
120 lb Pull Per Pair	36R957
130 lb Pull Per Pair	36R958
140 lb Pull Per Pair	36R959
150 lb Pull Per Pair	36R960
160 lb Pull Per Pair	36R961
Accessories	
Clip Extension Spring Cable Adjustment	36R962
Fork Extension Spring, 3"	36R963
Fork Extension Spring, 4"	36R964
Tandem Hookup Kit Extension Springs	36R965



Garage Door Drums, Pulleys, and Cable Assemblies

Description	Max. Wt. (Lb.)	Item No.
Drums and Pulleys, Pkg. of 2		
3 in Cable Pulley	200 lb	5MV4
4 in Cable Pulley	200 lb	5MV5
Commercial Drum - Keyed	1,000 lb	5MV0
	550 lb	5MV1
High Lift Drum - Keyed	1,000 lb	5MV2
Light Commercial Drum - Keyed	750 lb	5MV9
Residential Drum	530 lb	5MV8
Specialty Coated Commercial Drum - Keyed	1,000 lb	5MVE4
	550 lb	5MVE5
Specialty Coated High Lift Drum - Keyed	1,000 lb	5MVE6
Specialty Coated Light Commercial Drum - Keyed	750 lb	5MVE3
Specialty Coated Residential Drum	530 lb	5MVE2
Specialty Coated Vertical Lift Drum - Keyed	850 lb	5MVE7
Vertical Lift Drum - Keyed	850 lb	5MV3
GALVANIZED		
Outside Dia. (in.) Qty.	L Pkg. Item No. Includes	Item No. Includes
1/8 in 104 in 2	5MV6 Thimble	5MV2 Loop Only
1/8 in 116 in 2	5MV7 Thimble	5MV3 Loop Only
1/8 in 140 in 2	5MV8 Thimble	5MV4 Thimble
1563/10000 in 140 in 2	5MV9 Thimble	5MV5 Thimble
1/8 in 164 in 2	5MV0 Thimble	5MV6 Thimble
1563/10000 in 164 in 2	5MV1 Thimble	—
3/8 in 164 in 2	—	5MV7 Thimble

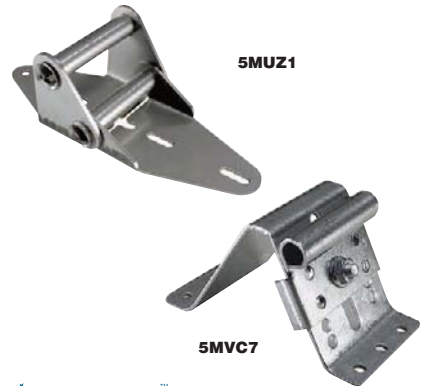

Garage Door Hinges and Brackets

Description	Material	Finish	Item No.	Pkg. Qty.
Garage Door Hinges				
#1 Heavy Duty	Zinc	Galvanized Steel	5MA2	4
#2 Heavy Duty	Zinc	Galvanized Steel	5MA3	2
#3 Heavy Duty	Zinc	Galvanized Steel	5MA4	2
#4 Heavy Duty	Zinc	Galvanized Steel	5MA5	2
#4 Heavy Duty	Zinc	Galvanized Steel	5MA6	2
#5 Heavy Duty	Zinc	Galvanized Steel	5MA7	2
#6 Heavy Duty	Stainless Steel	Mill Stainless Steel	5MU21	2
#9 Heavy Duty	Stainless Steel	Mill Stainless Steel	5MU24	2
Brackets				
Top Fixture - Adjustable	Steel	Zinc Plated	5MVC7	2