

**Hand Pump Hydraulic**

**Mechanical Spring Counterbalance**

**Electric Hydraulic**

**Dock Levelers**

- Load capacity: 20,000 lb.
- For docks at least 48"H


Permanently attach to dock face. Provide service range of 5" up, 5" down. No concrete recess required. Include 2" x 8" x 18" bumpers and steel bumper boxes. Can be used with Dock Seal 3KR49 or Dock Shelter 3KR50.

**Mechanical Spring Counterbalances**—Include handle for manual operation.

**Hand Pump Hydraulics**—Include hand pump, brackets, cylinder, hydraulic line, and oil.

**Electric Hydraulics**—Powered by ¾ HP, 110/220V, single-phase motor prewired to 115V, single-phase standard. Include motor, pump, control box, cylinder, brackets, lines, and oil.

Dock Leveler Lift Mechanism	Usable Width	Overall Width	Item No.
Mechanical Spring Counterbalance	66 in	93 in	5Z151
	72 in	99 in	3KR66
Hand Pump Hydraulic	66 in	93 in	6XX23
	72 in	99 in	6XX24
Electric Hydraulic	66 in	93 in	6XX21
	72 in	99 in	6XX22

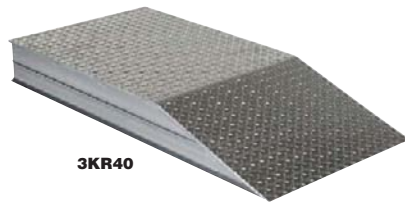

**3KR40**

**Aluminum Truck Wheel Risers**

- Priced and sold individually
- 30,000-lb. capacity per pair.

H	W	L	Level Length	Item No.
6 in	18 in	48 in	30 in	4UP78
6 in	24 in	48 in	30 in	3KR40
6 in	24 in	60 in	42 in	6XW79
8 in	18 in	54 in	30 in	6XW77
8 in	24 in	54 in	30 in	6XW81
8 in	24 in	60 in	36 in	6XW82
8 in	24 in	108 in	84 in	6XW80
12 in	24 in	72 in	36 in	6XW78



**20G291**

**Steel Truck Wheel Risers**

- 40,000-lb. capacity per pair
- Priced and sold individually

H	W	L	Level Length	Item No.
4 in	24 in	96 in	84 in	20G297
6 in	24 in	48 in	30 in	20G291
6 in	24 in	102 in	84 in	20G292
8 in	24 in	54 in	30 in	20G293
8 in	24 in	108 in	84 in	20G294
10 in	24 in	60 in	30 in	20G295
12 in	24 in	120 in	84 in	20G296



**Dock Seal**



**Dock Seal/Shelter Combination**

**Dock Seals and Seal/Shelter Combinations**

Dock seals have 36-oz. nylon-reinforced vinyl facing, mounted and bonded on wolmanized wood. Dock seal/shelter combinations have 18-oz. nylon-reinforced sides and 40-oz. nylon-reinforced top. Seals fasten directly to surface of building wall. Include 24"H yellow guide stripes and installation hardware.

Projection	Side Width	Side Height	Header Height	Overall Width	Overall Height	Fits Door Width	Fits Door Height	Item No.
<b>Dock Seal</b>								
10 in	12 in	96 in	12 in	120 in	108 in	8 ft	8 ft	5Z152
10 in	12 in	108 in	12 in	120 in	120 in	8 ft	9 ft	2HER9
12 in	12 in	96 in	12 in	120 in	108 in	8 ft	8 ft	5MKA5
12 in	12 in	108 in	12 in	120 in	120 in	8 ft	9 ft	5MKA7
20 in	12 in	96 in	12 in	120 in	108 in	8 ft	8 ft	3KR49
20 in	10 in	108 in	12 in	120 in	120 in	8 ft	9 ft	2HER1
<b>Dock Seal/Shelter Combination</b>								
10 in	12 in	120 in	30 in	114 in	126 in	8 ft	10 ft	2HER4
12 in	12 in	120 in	30 in	114 in	126 in	8 ft	10 ft	5MKA6
20 in	12 in	120 in	30 in	114 in	126 in	8 ft	10 ft	2HER5



**2HER3**



**Dock Shelter**

**Dock Shelters**

- Max. door size of 10 ft. W x 10 ft. H
- 132"W x 126"H

Seal off warehouse and interior loading dock from outside elements, keeping heating and cooling air inside and the elements out while allowing full access to truck door height and width. Heavy-duty reinforced vinyl exterior reduces wear.

Includes	Projection	Item No.
Safety Yellow Steel Guide Protectors and Corner Filler Pads, 36 in Drop Curtain with 40 oz Pleat, 21 in Vertical Flaps, Installation Hardware and Instructions	18 in	2HER2
Independent Spring Loaded Scissors Mechanism to Allow Shelter to Retract With the Trailer Keeping the Shelter Square, Installation Hardware and Instructions	24 in	3KR50
Safety Yellow Steel Guide Protectors and Corner Filler Pads, 36 in Drop Curtain with 40 oz Pleat, 21 in Vertical Flaps, Installation Hardware and Instructions	24 in	2HER3 *
Safety Yellow Steel Guide Protectors and Corner Filler Pads, 36 in Drop Curtain with 40 oz Pleat, 21 in Vertical Flaps, Installation Hardware and Instructions	30 in	5MKA8
	36 in	5MKA9
<b>Dock Seal Patch Kit</b>		
(2) Pieces of 18 oz Vinyl 12 in x 36 in; (2) Pieces of 18 oz Vinyl 12 in x 24 in; (2) Pieces of 18 oz Vinyl 12 in x 12 in; (1) 18 oz Can Of Glue and Instructions		5MKCO

\* Retractable.



**5GAC5**

**Dock Barricades**

- Welded steel construction
- Safety yellow finish
- 24" W

Mechanical model 5GAC5 has a hand crank winch and counter balance weight. Electric hydraulic models 5GAC3 and 5GAC4 include powered lift with 115V lift motor and 24V hand control.

Description	Overall Length	Raised Arm Height	Lowered Arm Height	Item No.
Mechanical Hand Winch For Use With 8 ft. x 8 ft. Doors	133 ¼ in	149 in	32 in	5GAC5
Electric Hydraulic For Use With 8 ft. x 8 ft. Doors	130 in	148 ¾ in	28 ½ in	5GAC3
Electric Hydraulic For Use With 10 ft. x 10 ft. Doors	157 in	172 ¾ in	28 ½ in	5GAC4