



5A501



5A506



1WXB6

## Drum Faucets and Drum Safety Vents

FM Approved, except 1XPX8. 5A501 is FM Approved for viscous liquids only, and 5A502 is FM Approved for nonviscous liquids only.

### DRUM FAUCETS

#### Brass Adjustable, Stainless Steel Adjustable, and Brass Rigid—

Self-closing. Use with oils up to 30W, noncorrosive flammables, and nonflammables. For use with drum in horizontal position. 5A504 has an internal flame arrestor and adjustable feature that allows the nozzle to be positioned after being threaded into drum. 5A503 has an external flame arrestor.

**Economy Zinc Rigid**—Self-closing with padlock holes. Cannot be used with chlorinated solvents. Brass color. 5A502 has a flame arrestor.

**Brass Gate Valve**—Self-closing wide mouth opening. Knife-style, spring-activated PTFE blade has positive shutoff when 4½" W handle is released. Use with viscous noncorrosive liquids heavier than 30W motor oil. Use with drums in horizontal position.

**Polypropylene Fiberglass Reinforced**—Allows drums with 2" plug to be emptied or filled from a horizontal position. Locking ring connects faucet to drum handle, unscrews plug for tapping or filling.

### DRUM SAFETY VENTS

**Horizontal**—Fusible emergency relief plug melts at 135°F. Brass bung vent and a flame-arresting baffle; max. content flow of 220 cfm at 20 psi.

**Vertical**—Provides manual vacuum relief. Internal flash arrestor.

Material	Shank Type	Seal Material	(M)NPT Inlet	Item No.
<b>Drum Faucets</b>				
Brass	Adjustable	PTFE	¾ in	5A504
Brass	Rigid	PTFE	¾ in	5A503
Brass	Rigid	PTFE	—	5W685 *
Die-Cast Zinc Alloy	Rigid	Viton	¾ in	5A501 *
Die-Cast Zinc Alloy	Rigid	Viton	¾ in	5A502
Polypropylene	—	Nitrile	2 in	1XPX8
Type	(M)NPT Inlet	Cracking Pressure	Item No.	
<b>Drum Safety Vents</b>				
Horizontal	—	5 psi	5A506	
Vertical	2 in	5 to 8 psi	1WXB6	

\* For use with viscous liquids.

## Drum Cover Accessories

**Safety Drum Funnel**—Fits into 2" drum bung. Accommodates padlock, not included.

**Drum Level Gauge**—Special plated fitting threads into ¾" NPT drum bung and has a female ¾" NPT provision to fit most faucets. Not for use with chlorinated solvents, high-concentrated acids, or alkalis.

**Polyethylene Pop-Up Gauge**—Indicator warns when nearing capacity. Screw into ¾" opening of a vertical drum.

**Drum Lock**—Solid brass with ½" zinc-plated steel lockarm, predrilled with a hole for a padlock, not included. Fits both 2" and ¾" standard dia. drum threads.

**Drum Plug Locking Device**—Locking device prevents access to the material contained in your drums. Simply slide the two halves of the locking device around the bung flange, slip the joining bar through the halves, and insert a padlock (sold separately) through the end hole of the bar. Sold in a set of two 2" plugs; fits plastic drums with raised bung flanges.



3AM06



2AV35



5A507



3KR44



9TM76

Description	Pkg. Qty.	Item No.
Safety Drum Funnel	1	3AM06
Drum Level Gauge	1	5A507
Polyethylene Pop-Up Gauge	1	2AV35
Drum Lock	1	3KR44
Drum Plug Locking Device	2	9TM76

## Drum Covers

**Polyethylene Drum Covers**—Lightweight, economical covers have UV screener.

**Steel Safety Drum Covers**—16-ga. steel drums convert open-top drums into fire-safe receptacles.


Description	Outside Dia.	Pkg. Qty.	Item No.
<b>Polyethylene</b>			
Clear, For 5 gal Pails	9¼" to 13¼"	100	8VU25
Clear, For 30 gal Drums	14 ¼ in to 18 ¼ in	100	3JN25
Clear, For 55 gal Drums	19 ¼ in to 23 ¼ in	100	3JN33
Clear, For 55 gal Drums	22 ¾ in	1	490210
Clear, For 55 gal Drums	25 ¾ in	1	490209
<b>Steel</b>			
Red, For 30 gal Drums	18 ¾ in	1	2VAE1
Red, For 55 gal Drums	22 ½ to 22 ¾ in	1	9G926
Red, For 55 gal Drums	22 ¾ in	1	6AX40



3JN33



2VAE1

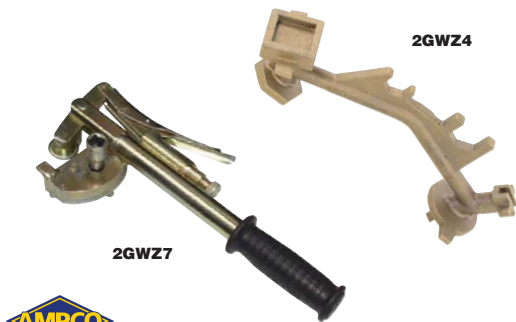

2GWZ7

2GWZ4

## Drum Deheaders and Plug Wrenches

**Drum Deheaders**—Open 5-gal. pails and 30- and 55-gal. drums. 2GWZ7 is for use with a ½" manual ratchet drive, not included. For ratchet drivers, see Grainger.com®.

Description	Construc.	Brand	Item No.
<b>Drum Deheaders</b>			
With Ergonomic Handle	Forged Steel	—	3AY68
Express Open Drum Deheader For Use With To Open 30 and 55 Gallon Steel Drums and 5 Gallon Pails	Forged Head	—	2GWZ7
Comfort Hand Grip, For Use with 30- and 55-gal. Steel Drums	Steel	—	38UJ21
<b>Replacement Blades</b>			
For Use With Non-sparking Drum Deheader 1RD22	Hardened Non-Ferrous Alloy	—	1RD23
For Use With Drum Deheader 3AY68	Forged Steel	—	1VKC7
For Plug/Bung Style	Overall Length	Material	Brand
<b>Drum Bung/Plug Wrench</b>			
T-Type, Standard, Pressure Relief	12 in	Aluminum, Bronze, Nickel	Ampco
<b>Drum Bung Wrench</b>			
Bung Pattern 4	10 in	Nylon	—
Bung Pattern 4	11 in	Alloy Steel	—
Bung Pattern 4	11 in	Brass	—
Bung Pattern 4	12 in	Stainless Steel	—
Bung Pattern 4	12 in	Bronze	—
Bung Pattern 4	13 in	Alloy Steel	—
Bung Pattern 4	13 in	Bronze	—
Bung Pattern 4	18 ¾ in	Alloy Steel	—
<b>Drum Plug Torque Wrench</b>			
Rieke Hex Head Plugs 20-9 Ft-Lb	14 ½ in	Iron	—
Rieke T Style Round Head Plugs	14 ½ in	Alloy Steel	—
<b>Drum Plug Wrench</b>			
1 ¼ in Slotted Bung, 2 in Cross Bar Bung	12 in	Bronze	—
Bung Pattern 1, Bung Pattern 2, Bung Pattern 3, Bung Pattern 4, Bung Pattern 5	12 in	Brass Alloy	—
Bung Pattern 1, Bung Pattern 2, Bung Pattern 3, Bung Pattern 4, Bung Pattern 5	13 ¾ in	Cast Iron	—

