




| Wheel Dia.                                    | Wheel Width | Load Rating | For Axle Size | Hub Length | Brand    | Item No. |
|---|-------------|-------------|---------------|------------|----------|----------|
| <b>Center-Mount Plastic Hub Ribbed Tread</b>  |             |             |               |            |          |          |
| 9 1/8 in                                      | 1 1/8"      | 550 lb      | 5/8"          | 3 1/4"     | Marastar | 40N436   |
| 10 in   | 3"          | 500 lb      | 3/4"          | 3 1/4"     | —        | 53CM91   |
| <b>Center-Mount Steel Hub Centipede Tread</b> |             |             |               |            |          |          |
| 6 in  | 2"          | 250 lb      | 1/2"          | 2 1/16"    | —        | 53CM75   |
| 8 in  | 1 1/2"      | 280 lb      | 1/2"          | 2 1/16"    | Marastar | 16V340   |
|   | 2"          | 300 lb      | 1/2"          | 2 1/16"    | —        | 53CM76   |
| <b>Knobby Tread</b>                           |             |             |               |            |          |          |
| 6 in  | 3 1/4"      | 500 lb      | 5/8"          | 6"         | Marastar | 46G098   |
|   | 3 1/2"      | 500 lb      | 3/4"          | 3"         | Marastar | 46G099   |
| 15 1/2 in                                     | 4"          | 375 lb      | 5/8"          | 6"         | —        | 53CM70   |
|   | 4"          | 375 lb      | 3/4"          | 3"         | —        | 53CM71   |
| <b>Ribbed Tread</b>                           |             |             |               |            |          |          |
| 6 in  | 2"          | 200 lb      | 1/2"          | 2 1/2"     | —        | 1NWY3    |
|   | 3 1/2"      | 200 lb      | 5/8"          | 2 1/4"     | —        | 1NX84    |
|   | 3 3/8"      | 200 lb      | 5/8"          | 2 1/4"     | —        | 1NWY7    |
| 6 1/8 in                                      | 3 1/2"      | 250 lb      | 3/4"          | 2 1/4"     | —        | 1NX86    |
|   | 2 13/32"    | 250 lb      | 5/8"          | 2 3/4"     | —        | 1NX88    |
|   | 3 7/8"      | 250 lb      | 3/4"          | 2 3/4"     | —        | 1NX89    |
| 8 in  | 3 3/8"      | 350 lb      | 1/2"          | 3"         | —        | 1NWY4    |
|   | 3 3/8"      | 350 lb      | 5/8"          | 2 3/4"     | —        | 1NWY8    |
|   | 3 1/4"      | 400 lb      | 5/8"          | 2 1/2"     | —        | 1NW24    |
|   | 4"          | 350 lb      | 3/4"          | 2 3/4"     | —        | 1NWY9    |
| 10 in   | 2 1/2"      | 450 lb      | 5/8"          | 3 1/4"     | —        | 1NW22    |
|   | 3 1/4"      | 300 lb      | 3/4"          | 3"         | —        | 1NW27    |
|   | 3 1/8"      | 350 lb      | 1/2"          | 3 1/2"     | —        | 1NWY5    |
|   | 2"          | 600 lb      | 5/8"          | 3 1/4"     | Marastar | 40N438   |
| 12 in   | 3 1/4"      | 300 lb      | 3/4"          | 3 1/4"     | —        | 1NW23    |
|   | 3 3/8"      | 540 lb      | 1/2"          | 3 1/2"     | —        | 1NWY6    |
|   | 3"          | 600 lb      | 3/4"          | 3 1/4"     | Marastar | 40N439   |
| 13 3/8 in                                     | 1 7/8"      | 350 lb      | 5/8"          | 3"         | Marastar | 46G090   |
|   | 2"          | 350 lb      | 5/8"          | 3"         | Marastar | 46G089   |
|   | 2 1/2"      | 350 lb      | 5/8"          | 6"         | Marastar | 46G091   |
|   | 3"          | 500 lb      | 5/8"          | 3"         | Marastar | 46G095   |
|   | 3"          | 500 lb      | 5/8"          | 6"         | Marastar | 46G096   |
| 15 1/2 in                                     | 3"          | 500 lb      | 3/4"          | 3"         | Marastar | 46G097   |
|   | 4"          | 375 lb      | 5/8"          | 3"         | —        | 53CM67   |
|   | 4"          | 375 lb      | 3/4"          | 3"         | —        | 53CM69   |
| <b>Sawtooth Tread</b>                         |             |             |               |            |          |          |
| 6 in  | 1 1/8"      | 100 lb      | 1/2"          | 2 3/8"     | —        | 53CM52   |
| 6 1/8 in                                      | 1 1/2"      | 250 lb      | 1/2"          | 2 3/8"     | Marastar | 46G080   |

## Flat-Free Wheels

Polyurethane foam wheels absorb more shock and provide a more cushioned ride than semipneumatic wheels. Do not require air pressure checks and will not go flat if punctured. Suitable for rolling over rough or uneven terrain in areas with sharp debris.


| Wheel Dia.                              | Wheel Width | Load Rating | For Axle Size | Hub Length | Brand    | Item No. |
|---|-------------|-------------|---------------|------------|----------|----------|
| 8 in                                    | 1 3/4"      | 150 lb      | 1/2"          | 2 3/8"     | Marastar | 46G081   |
|   | 2"          | 100 lb      | 1/2"          | 2 3/8"     | —        | 53CM53   |
|   | 3"          | 200 lb      | 1/2"          | 3"         | —        | 53CM55   |
| 8 1/2 in                                | 3"          | 200 lb      | 3/4"          | 3"         | —        | 53CM47   |
| 8 3/4 in                                | 3"          | 275 lb      | 1/2"          | 3"         | Marastar | 46G083   |
|   | 3"          | 225 lb      | 5/8"          | 3 1/2"     | —        | 53CM57   |
| 10 in                                   | 3"          | 225 lb      | 5/8"          | 4"         | —        | 53CM49   |
|   | 3"          | 225 lb      | 3/4"          | 3 1/2"     | —        | 53CM58   |
|   | 3"          | 225 lb      | 3/4"          | 4"         | —        | 53CM50   |
| 10 3/8 in                               | 1 3/4"      | 300 lb      | 5/8"          | 3 1/2"     | Marastar | 46G085   |
|   | 1 3/4"      | 300 lb      | 3/4"          | 3 1/2"     | Marastar | 46G086   |
| 12 in                                   | 3"          | 325 lb      | 3/4"          | 3"         | —        | 53CM59   |
|   | 1 7/8"      | 400 lb      | 3/4"          | 3"         | Marastar | 46G087   |
| 12 1/8 in                               | 1 7/8"      | 400 lb      | 3/4"          | 4 1/2"     | Marastar | 46G088   |
| 15 1/8 in                               | 3 1/2"      | 675 lb      | 3/4"          | 3"         | —        | 53CM51   |
| <b>Smooth Tread</b>                     |             |             |               |            |          |          |
| 9 3/8 in                                | 1 3/4"      | 300 lb      | 3/4"          | 4"         | Marastar | 46G084   |
| 15 1/2 in                               | 3 3/8"      | 500 lb      | 1"            | 6"         | Marastar | 36LE96   |
|   | 4"          | 425 lb      | 1"            | 6"         | —        | 53CM42   |
| <b>Turf Tread</b>                       |             |             |               |            |          |          |
| 6 3/8 in                                | 2 1/2"      | 400 lb      | 3/4"          | 3"         | Marastar | 46G094   |
| 13 in                                   | 3 1/2"      | 325 lb      | 3/4"          | 3"         | —        | 53CM64   |
| 13 3/8 in                               | 2 1/2"      | 400 lb      | 3/4"          | 3 1/8"     | Marastar | 46G092   |
| 13 1/2 in                               | 2 1/2"      | 400 lb      | 3/4"          | 3 1/8"     | Marastar | 46G093   |
| <b>Offset Plastic Hub Ribbed Tread</b>  |             |             |               |            |          |          |
| 8 in                                    | 2"          | 500 lb      | 5/8"          | 2 1/4"     | Marastar | 16V338   |
| 9 1/8 in                                | 1 1/8"      | 550 lb      | 3/4"          | 2 1/4"     | Marastar | 40N435   |
| 10 in                                   | 2 1/2"      | 450 lb      | 5/8"          | 2 1/4"     | —        | 1NWZ6    |
|   | 2"          | 500 lb      | 5/8"          | 2 1/4"     | —        | 53CM72   |
| <b>Offset Steel Hub Centipede Tread</b> |             |             |               |            |          |          |
| 10 in                                   | 3"          | 440 lb      | 5/8"          | 2 1/4"     | Marastar | 16V341   |
| 10 3/8 in                               | 3"          | 390 lb      | 5/8"          | 2 1/4"     | —        | 53CM77   |
| <b>Ribbed Tread</b>                     |             |             |               |            |          |          |
| 6 in                                    | 3 1/2"      | 200 lb      | 5/8"          | 2 1/4"     | —        | 1NX85    |
|   | 3 1/2"      | 250 lb      | 3/4"          | 2 1/4"     | —        | 1NX87    |
| 8 in                                    | 2"          | 250 lb      | 1/2"          | 2 1/4"     | —        | 53CM83   |
|   | 4 1/2"      | 400 lb      | 5/8"          | 2 1/4"     | —        | 1NWZ5    |
| <b>Sawtooth Tread</b>                   |             |             |               |            |          |          |
| 8 3/8 in                                | 3 1/8"      | 275 lb      | 5/8"          | 2 1/4"     | Marastar | 46G082   |
| 8 1/2 in                                | 3 3/8"      | 300 lb      | 1/2"          | 2 1/4"     | —        | 22NY37   |
|   | 3"          | 225 lb      | 5/8"          | 2 1/4"     | —        | 53CM41   |
| 10 in                                   | 3 3/8"      | 300 lb      | 5/8"          | 2 3/8"     | Marastar | 36LE95   |
|   | 3"          | 350 lb      | 5/8"          | 2 1/4"     | —        | 53CM95   |
| 10 1/4 in                               | 4 1/4"      | 350 lb      | 5/8"          | 2 1/4"     | —        | 22NY38   |
| 10 1/2 in                               | 1 7/8"      | 350 lb      | 5/8"          | 2 1/4"     | —        | 22NY39   |

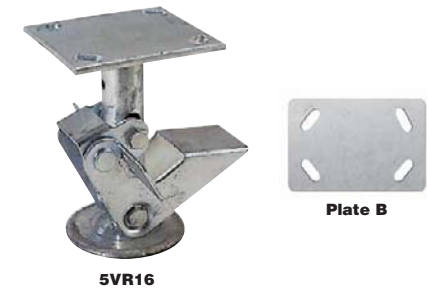

## General Purpose Floor Locks

Locks are made from zinc-plated steel. Mount on carts and other wheeled equipment. Foot pedal engages a spring-loaded brake pad that prevents equipment from moving.

| For Wheel Dia. | Floor Lock Retracted Height | Floor Lock Extended Height | For Caster Mounting Height | Mounting Plate Size | Mounting Plate Bolt Hole Pattern | Item No. |
|----------------|-----------------------------|----------------------------|----------------------------|---------------------|----------------------------------|----------|
| 4 in           | 4 3/8 in                    | 6 in                       | 5 3/8 in                   | 4 in x 4 1/2 in     | B                                | 5VP58    |
|                | 4 7/8 in                    | 6 in                       | 5 5/8 in                   | 4 in x 4 1/2 in     | B                                | 16V371   |
|                | 5 1/2 in                    | 6 1/8 in                   | 6 1/2 in                   | 4 in x 4 1/2 in     | B                                | 5VP59    |
| 5 in           | 5 3/4 in                    | 6 1/4 in                   | 5 3/4 in                   | 4 1/2 in x 4 3/4 in | B                                | 16V372   |
|                | 6 3/8 in                    | 7 1/8 in                   | 7 1/4 in                   | 4 in x 4 1/2 in     | B                                | 5VP60    |
| 6 in           | 6 3/8 in                    | 7 1/8 in                   | 7 1/2 in                   | 4 in x 4 1/2 in     | B                                | 5VR15    |
|                | 8 3/8 in                    | 9 3/4 in                   | 9 1/2 in                   | 4 in x 4 1/2 in     | B                                | 5VP61    |
| 8 in           | 8 3/4 in                    | 9 3/4 in                   | 8 3/4 in                   | 4 1/2 in x 4 3/4 in | B                                | 16V374   |
|                | 9 1/8 in                    | 10 1/2 in                  | 10 1/8 in                  | 4 in x 4 1/2 in     | B                                | 5VR16    |

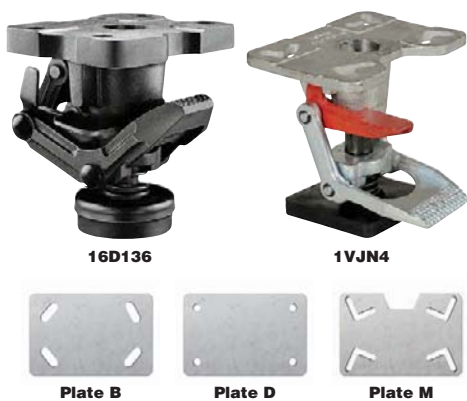

## Heavy-Duty Adjustable-Height and Low-Profile Floor Locks

Locks have cast steel or stainless steel bodies and provide more strength and abrasion resistance than general purpose floor locks. **Adjustable-height** locks allow users to change the height of the locks' friction pads so they can be used with casters in a range of heights. Allows users to compensate for wear on the pads to maintain proper locking and unlocking action. **Low-profile** locks help ensure sufficient clearance when used on low-profile carts.

| For Wheel Dia.                                  | Floor Lock Retracted Height | Floor Lock Extended Height | For Caster Mounting Height | Mounting Plate Size | Mounting Plate Bolt Hole Pattern | Material        | Item No. |
|---|-----------------------------|----------------------------|----------------------------|---------------------|----------------------------------|-----------------|----------|
| <b>Heavy-Duty</b>                               |                             |                            |                            |                     |                                  |                 |          |
| 6 in  | 6 3/8 in                    | 8 3/8 in                   | 7 1/2 in                   | 4 1/2 in x 6 in     | D                                | Steel           | 16D135   |
|   | 6 1/2 in                    | 8 1/2 in                   | 8 in                       | 6 in x 4 1/2 in     | D                                | Steel           | 16D136   |
| <b>Heavy-Duty Adjustable-Height</b>             |                             |                            |                            |                     |                                  |                 |          |
| 4 in, 5 in, 6 in                                | 5 in                        | 6 1/8 in to 8 in           | 6 1/4 in to 8 in           | 4 1/2 in x 6 1/2 in | M                                | Steel           | 1VJN4    |
|   | 5 in                        | 6 1/8 in to 8 in           | 6 1/8 in to 8 in           | 4 1/2 in x 6 1/2 in | B                                | Stainless Steel | 2EMZ8    |
| 6 in, 8 in                                      | 6 1/4 in                    | 11 1/2 in                  | 6 1/4 in to 9 1/2 in       | 4 1/2 in x 6 1/2 in | M                                | Stainless Steel | 2EMZ9    |
|   | 6 3/8 in                    | 11 1/2 in                  | 8 1/4 in to 11 1/2 in      | 4 1/2 in x 6 1/2 in | M                                | Steel           | 1VJN5    |
| <b>Heavy-Duty Low-Profile Adjustable-Height</b> |                             |                            |                            |                     |                                  |                 |          |
| —   | 3 3/8 in                    | 4 3/8 in                   | 4 3/4 in                   | 5 1/2 in x 5 1/2 in | D                                | Steel           | 2GWZ8    |