

1-800-GRAINGER (472-4643)




**Velox**

**Machine Guard System**

■ Includes installation hardware  
Easy-to-assemble barriers protect workers from dangerous machinery, equipment, and robotic cells. 8-ga. panels are welded to a 2" x 2" wire grid pattern. Order panels separately. Use hook fasteners and drive pins (included) to fasten into a 16-ga. 2½" square steel post. Components come with welded footplates and anchor bolts. System installs 50% faster than most other wire guarding products and is easily modified to accommodate field obstructions.

**Hinged Door**

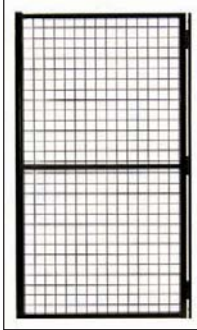

Description	H	W	Item No.
<b>Doors</b>			
Left Open Sliding Door	6 ft	5 ft	48RN11
Right Open Sliding Door	6 ft	5 ft	48RN12
Welded-Wire Machine Guard Door	66 in	2 ft 10 in	6TMK9
Welded-Wire Machine Guard Door	6 ft	3 ft 10 in	6TML0
Machine Guard Cut-Down Panel Kit	—	—	6TML6

H	W	Item No.	Description	H	Item No.	
<b>Machine Guard Panels</b>						
6 ft	10 in	23PC13	<b>Posts</b>	6 ft	6TMK6	
6 ft	22 in	23PC14		Slide Door Post	6 ft	48RN13
6 ft	34 in	23PC15		Swing Door Post	6 ft	6TMK7
6 ft	46 in	23PC16		Adjustable Corner Post	6 ft	6TMK8
6 ft	58 in	23PC17				
6 ft	70 in	23PC18				
6 ft	82 in	23PC19				
6 ft	94 in	23PC20				



**Double 54XU47**


**Steel Folding Dock Gates**

¾" x ¾" 15-ga. U-channels riveted back-to-back construction. Equipped with self-securing center drop-in pin. 12-ga. steel vertical gate rails are 1½" x 1½". Universal mounting on face or in casing. Powder-coated finish. Include brackets, bearing washers, casters, and lock lugs. Padlocks not included.

Opening Width	Folded Height	Folded Width	In Use Height	Item No.	Opening Width	Folded Height	Folded Width	In Use Height	Item No.
<b>Single</b>									
3 to 4 ft	6 ½ ft	7 ft	6 ft	54XU44	10 to 12 ft	6 ½ ft	11 in	6 ft	54XU55
5 to 6 ft	6 ½ ft	7 ft	6 ft	54XU43	12 to 14 ft	7 ½ ft	7 ft	7 ft	54XU54
					14 to 16 ft	6 ½ ft	7 ft	6 ft	54XU53
						11 in	7 ft	7 ft	54XU51
					16 to 18 ft	15 in	7 ft	6 ½ ft	54XU52
						15 in	7 ft	7 ½ ft	54XU50
6 to 7 ft	11 in	7 ft	7 ft	54XU40	18 to 20 ft	15 in	7 ft	6 ½ ft	54XU49
						15 in	7 ft	7 ½ ft	54XU48
					<b>Portable Single</b>				
					6 to 7 ft	6 ½ ft	6 ft 6 in	6 ft	54XU28
					<b>Portable Double</b>				
					1 to 12 ft	6 ½ ft	6 ft 6 in	6 ft	54XU29
<b>Single</b>									
6 to 7 ft	11 in	7 ½ ft	7 ft	54XU35	6 to 7 ft	8 ½ ft	11 in	8 ft	54XU38
					7 to 8 ft	7 ft	15 in	6 ½ ft	54XU32
					8 to 9 ft	8 ft	15 in	7 ½ ft	54XU30
					9 to 10 ft	7 ft	15 in	6 ½ ft	54XU46
						8 ft	15 in	7 ½ ft	54XU45
<b>Double</b>									
6 to 8 ft	6 ½ ft	7 ft	6 ft	54XU47					
8 to 10 ft	11 in	6 ft	6 ft	54XU57					



19N865

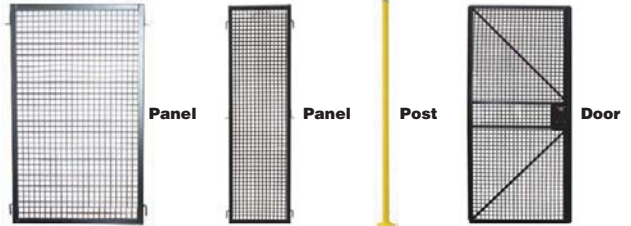

**Machine Guard System**

Up to 12" sweep. Panel system is held in place with pins, brackets, and safety nuts. Can be reconfigured. All-steel, welded-wire post. Lockable hinged doors. Includes safety socket wrench.

H	W	Item No.	H	W	Item No.
<b>Wire Partition Panels</b>			<b>Posts</b>		
5 ft	2 ft	19N873	<b>Line Posts</b>		
	3 ft	19N872	6 ft	2 in	19N876
	4 ft	19N871	8 ft	2 in	19N874
	5 ft	19N870	<b>Offset Post</b>		
	8 ft	19N869	8 ft	2 in	19N875
7 ft	2 ft	19N868	<b>Corner Post</b>		
	3 ft	19N867	6 ft	2 in	19N877
	4 ft	19N866	<b>Doors</b>		
	5 ft	19N865	5 ft	4 ft	19N880
			7 ft	3 ft	19N879
				4 ft	19N878




**Panel 19H220**

**Saf-T-Fence Machine Perimeter Guarding**

- Economical alternative to permanent walls
- Combines security, strength, and flexibility

An all-steel, modular system of panels, posts, and hinged doors protect machinery, employees, and visitors. Easy to assemble with interchangeable panels and posts. 10-ga. welded wire mesh with 1¼" x 2½" grid openings welded to 1½" x 1½" x 14-ga. steel angle frames.



**Post 19H232**



**Hinged Door 19H230**

Overall Height	Overall Width	Item No.	Overall Height	Overall Width	Item No.	
<b>Panels</b>						
58 in	10 in	19H236	<b>Posts</b>	5.3 ft	3 in	19H232
	16 in	19H238		7 ft	2 in	19H234
	19 in	19H240		<b>Hinged Doors</b>		
	22 in	19H220		5 ft	3 ft	19H246
	28 in	19H243				
	34 in	19H221		5 ft	4 ft	19H248
	46 in	19H222		7 ft	3 ft	19H247
	58 in	19H223		7 ft	4 ft	19H249
	70 in	19H245		<b>With Cylinder Lock</b>		
	94 in	19H224		5 ft	4 ft	19H229
82 in	10 in	19H237	7 ft	3 ft	19H230	
	16 in	19H239				
	19 in	19H241	7 ft	4 ft	19H231	
	22 in	19H225				
	28 in	19H244				
	34 in	19H226				
	48 in	19H227				
	58 in	19H228				

Sign in to **Grainger.com**® to see **YOUR Pricing** and **MORE**