

Multisurface Rubberized Coatings

Rubberized Liquid Coatings apply to surfaces and then dry to be waterproof barriers.

Rubberized Tape Adhesives produce leakproof membranes and insulation necessary to cover the entire surface of a pipe. They can be used in conjunction with liquid coatings like epoxies to enhance surface protection. Withstands tear and abrasion.



Color	Coverage Area	Container Size	Container Type	Dry Time	Cure Time	Brand	Item No.
Rubberized Liquid Coatings							
Rubber							
Black	2 sq ft	2 oz	Aerosol	24 to 48 hr	24 to 48 hr	Flex Seal	55KE45
	37.5 sq ft	32 oz	Can	24 to 48 hr	48 hr	Flex Seal	55KE52
Clear	2 sq ft	2 oz	Aerosol	24 to 48 hr	24 to 48 hr	Flex Seal	55KE46
	37.5 sq ft	32 oz	Can	24 to 48 hr	48 hr	Flex Seal	55KE53
Gray	12 sq ft	14 oz	Aerosol	2 to 3 hr	2 to 3 hr	Flex Seal	55KE47
	37.5 sq ft	32 oz	Can	24 to 48 hr	48 hr	Flex Seal	55KE55
White	12 sq ft	14 oz	Aerosol	2 to 3 hr	2 to 3 hr	Flex Seal	55KE50
	37.5 sq ft	32 oz	Can	24 to 48 hr	48 hr	Flex Seal	55KE56
Solvent							
Black	20 sq ft	16 oz	Can	20 to 30 min	30 min	Nu-Calgon	20LP95
Clear	310 sq ft	1 gal	Can	24 hr	24 hr	Zinsser	36RD93
White	20 sq ft	16 oz	Can	20 to 30 min	30 min	Nu-Calgon	1ANJ9

Coverage Area	Tape Shape	Color	Surface Material	Brand	Item No.
Rubberized Tape Adhesives					
10 sq ft	Continuous Roll	Black	Concrete, Metal, Wood	Flex Seal	55KJ96
	Continuous Roll	White	Concrete, Metal, Wood	Flex Seal	55KJ99
24 sq in	Strip	Black	Concrete, Metal, Wood	Flex Seal	55KJ95



Rubberized Liquid Coating
55KE45



Rubberized Tape Adhesive
55KJ96



Cool Rubberized Dip Coatings

These coatings contain an air-dry, specialty rubber formulation that is peelable, flexible, insulating, non-slip, and durable. Metal parts may be dipped into the coating to enhance appearance, provide a soft grip, or protect the part from chemicals or abrasion.


Color	Minimum Application Temperature	Maximum Application Temperature	Container Size	Applic. Method	Dry Time	Dry Time to Recoat	Brand	Item No.
Black	—	—	1 gal	Brush, Spray	24 hr	1 hr	—	3KZK5
Blue	-30 °F	200 °F	14.5 oz	Brush, Dip, Spray	4 hr	4 hr	Loctite	6KVD1
	-30 °F	200 °F	1 gal	Brush, Dip, Spray	4 hr	4 hr	Loctite	6KVD2
Green	—	—	1 gal	Brush, Spray	24 hr	1 hr	—	3KZK7
	-30 °F	200 °F	1 gal	Brush, Dip, Spray	4 hr	4 hr	Loctite	6KVD4
Red	—	—	1 gal	Brush, Spray	24 hr	1 hr	—	3KZL4
	-30 °F	200 °F	14.5 oz	Brush, Dip, Spray	4 hr	4 hr	Loctite	6KVD3



3KZK5



Loctite 6KVD2

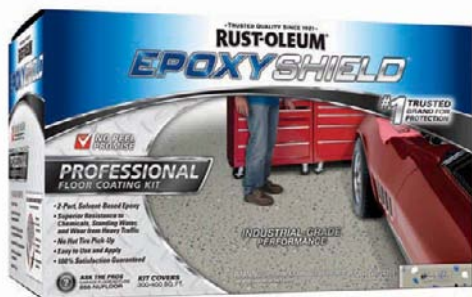

3BU19



Garage Floor Coating Kits

Surfaces: Concrete

EpoxyShield Professional—2-component finish strengthens and protects concrete floors. Resists chemicals and standing water.

EpoxyShield—One coat brightens floor with a clean, glossy, water-based coating. Protect against gasoline, antifreeze, motor oil, salt, hot tire pickup and cracking.

Color	Coverage Area	VOC Content	Dry Time	Container Size	Mfr. Model	Brand	Item No.
EpoxyShield, Professional							
Dark Gray	150 to 200 sq ft/gal	Less Than 250 g/L	4 day	2 gal	238467	Rust-Oleum	1TBG4
Dunes Tan	150 to 200 sq ft/gal	Less Than 250 g/L	4 day	2 gal	238466	Rust-Oleum	1TBG3
Silver Gray	150 to 200 sq ft/gal	Less Than 250 g/L	24 to 96 hr	2 gal	203373	Rust-Oleum	3BU19
Tile Red	150 to 200 sq ft/gal	Less Than 250 g/L	4 day	2 gal	238468	Rust-Oleum	1TBG5
EpoxyShield							
Clear	250 to 500 sq ft/kit	Less Than 75 g/L	24 to 72 hr	1 gal	292514	Rust-Oleum	52JU45
Gray	250 sq ft/pouch	Less Than 50 g/L	72 hr	120 oz	251965	Epoxyshield	6KP68
Tan	250 sq ft/pouch	Less Than 50 g/L	72 hr	120 oz	251966	Epoxyshield	6KP69



Perma-Patch 3ZC17



GreenPatch 39F847

Asphalt Patch Paving Material

Sakrete—21HC47 is a liquid formula used to fill cracks up to 1/2" wide. Accepts traffic after 5 days. 39UV47 has a full cure time of 2 days.

Perma-Patch—Patches potholes, utility cuts, and cracks. Bonds permanently to asphalt, concrete, steel, and wood. Apply in any weather condition. No mixing. Dries immediately; cures faster under greater volumes of traffic. Compaction can be accomplished by hand tamping.

GreenPatch—Ready-to-use VOC-compliant formula contains recycled asphalt and permanently repairs potholes and cracks in pavement. Workable in all weather and can be installed in standing water. Accepts traffic immediately after application.

Rust-Oleum—Concrete Patch and Repair is a 2-part, industrial-strength epoxy that permanently bonds concrete, won't shrink or crack, and creates a surface stronger than concrete. For indoor/outdoor use. Fast curing; paintable in 8 hours. Easy mixing, low odor, no solvents.

Sakrete	Description	Coverage	Container Size	Mfr. Model	Item No.
Blacktop Crack Filler	160 ft @ 1/4 in x 1/4 in	1 gal	120039	21HC47	
	40 ft @ 1/4 in x 1/4 in	1 qt	120041	39UV47	
Perma-Patch					
Permanent Pavement Repair	3 sq ft @ 1 in	30 lb	PP-30-CP	13R450	
	Black Asphalt Paving Compound	6 sq ft @ 1 in	60 lb	PP-60-C	3ZC17
GreenPatch					
Pavement Repair Patch	3 sq ft @ 21 in x 21 in x 1 in	40 lb	GP40P	39F847	
	Cold Patch	4 sq ft @ 2 ft x 2 ft x 1 in	50 lb	GP50	39F846
Rust-Oleum					
Concrete Patch and Repair	14 Linear ft @ 1/2 in x 1/2 in	24 oz	301012	52JU46	