




Accessories



Cab Mount
16V474




Twin Leg
16V473



Single Leg
16V475

Each Nano-Lok SRL has an integrated anchorage loop to let you install anchorage connections such as these and leave the harness dorsal D-ring open for other equipment or rescue.

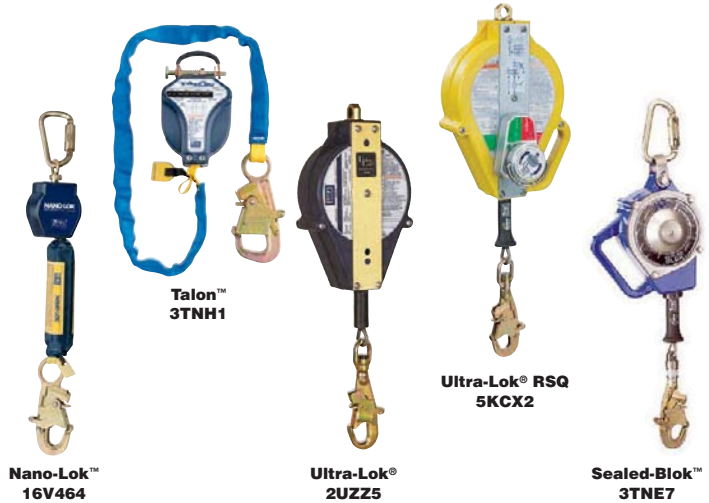

Nano-Lok™
16V464

Ultra-Lok™
2UZZ5

Sealed-Blok™
3TNE7



Self-Retracting Lifelines

NANO-LOK™

- Meet ANSI standards, except Tie-Back

Standard—Light, compact units feature an impact-resistant housing with swiveling anchorage loop and automatic quick-activating arrestor.

45WA80 is designed for welding, grinding, and other high-heat applications. It has flame-resistant Kevlar®/Nomex® fiber webbing and is arc rated APTV 8 cal./cm².

Tie-Back—Units incorporate a 36" tie-back leg, to eliminate the need for a separate anchor connector, tie-off adapter, or scaffold choker. UV-resistant nylon housing.

LE (Leading Edge)—Designed for safety and comfort in foot-level tie-off and sharp-edge applications. Weight-dispersing energy absorber and 360°-rotating connector attach directly to harness, leaving the D-ring open. 2-leg SRLs provide 100% tie-off.

Connectors—Use to secure a Nano-Lok SRL directly to a full-body harness webbing, leaving the back D-ring available.

TALON™

- Meet ANSI and CSA standards (except No. DBI3102100 does not meet ANSI)

Standard—Compact design with quick-connect handle for direct attachment to anchorage or harness.

Tie-Back—Eliminate the need for a separate anchorage connector. Built-in lanyard keepers and hook-and-loop attachment fit most harnesses.

Cab Mount Bracket—Connects directly to the cab for convenient anchorage point.

ULTRA-LOK®

- Meet ANSI standards

Corrosion-resistant stainless steel components with durable polyurethane housing. Antiratcheting, twin disc brake system limits arresting forces.

ULTRA-LOK® RSQ

- Meet ANSI standards

Provide fall arrest with assisted rescue capabilities and automatic self-rescue. Constructed of reinforced plastic and include built-in carrying handle.

SEALED-BLOK™

- Meet ANSI and CSA standards

Fully sealed design protects working components, enhances safety, and extends working life.

SRL Length	No. of Legs	Anchorage Hook Type	Harness Hook Type	Weight Cap.	Mfr. Model	Item No.
Nano-Lok™						
Standard, 2³/₂" Nylon Webbing						
6 ft.	1	—	Snap Hook	420 lb	3101252	16V466
6 ft.	1	Carabiner	Snap Hook	420 lb	3101215	16V464
6 ft.	1	Aluminum Carabiner	Snap Hook	420 lb	3101214	16V465
6 ft.	1	Carabiner	Steel Rebar Hook	420 lb	3101217	16V467
6 ft.	1	Aluminum Carabiner	Aluminum Rebar Hook	420 lb	3101236	16V468
6 ft.	2	Snap Hook	Quick Connect	420 lb	3101279	16V471
6 ft.	2	Snap Hook	Quick Connect	420 lb	3101276	16V469
6 ft.	2	Aluminum Rebar Hook	Quick Connect	420 lb	3101277	16V470
6 ft.	2	Steel Rebar Hook	Quick Connect	420 lb	3101280	16V472
Standard 2³/₂" Kevlar®/Nomex Webbing						
6 ft.	1	Carabiner	Snap Hook	420 lb	3101498	45WA80
Tie-Back, 2³/₂" Nylon Webbing						
9 ft.	1	Snap Hook	Quick Connect	420 lb	3101366	46W460
9 ft.	2	Snap Hook	Quick Connect	420 lb	3101374	46W459
LE (Leading Edge) with 3/16" Galvanized Cable						
8 ft.	1	Carabiner	Quick Connect	420 lb	3500214	19TR91
8 ft.	2	Carabiner	Swivel Snap Hook	420 lb	3500229	19TR85
8 ft.	1	Snap Hook	Quick Connect	420 lb	3500210	19TR89
8 ft.	2	Snap Hook	Quick Connect	420 lb	3500225	19TR83
8 ft.	1	Aluminum Snap Hook	Aluminum Captive Eye Carabiner	420 lb	3500215	19TR92
8 ft.	1	Aluminum Rebar Hook	Quick Connect	420 lb	3500216	19TR93
8 ft.	2	Aluminum Rebar Hook	Quick Connect	420 lb	3500231	19TR81
8 ft.	1	Steel Rebar Hook	Quick Connect	420 lb	3500212	19TR90
8 ft.	2	Steel Rebar Hook	Quick Connect	420 lb	3500227	19TR82
8 ft.	1	Swivel Snap Hook	Snap Hook	420 lb	3500211	19TR87
8 ft.	2	Swivel Snap Hook	Quick Connect	420 lb	3500226	19TR84
LE (Leading Edge) 3/16" Kevlar®/Galvanized Steel Cable						
9 ft.	1	5K® Snap Hook	Tie-Back	420 lb	3500213	19TR88
9 ft.	2	5K® Snap Hook	Tie-Back	420 lb	3500228	19TR80
Nano-Lok™ Connectors						
For Use with Nano-Lok Single Leg Self-Retracting Lanyards						
—	1	—	—	420 lb	3100088	16V475
For Use with Nano-Lok Twin Leg Self-Retracting Lanyards						
—	—	—	—	420 lb	3100087	16V473
For Use with Nano-Lok Single Leg Self-Retracting Lanyards						
—	—	—	—	—	3100089	16V474
Talon™						
Standard, 3/4" Nylon Webbing						
8 ft.	1	Swivel Snap Hook	Steel Rebar Hook	310 lb	3101000	3TNG7
8 ft.	1	Swivel Snap Hook	Carabiner	310 lb	3101001	3TNG8
Tie-Back, 3/4" Nylon Webbing						
9 ft. 6"	1	—	Quick Connect	310 lb	3101300	3TNH1
Tie-Back, 1" Nylon Webbing						
6 ft.	1	Steel Rebar Hook	Quick Connect	310 lb	3102003	3TNG9
7 ft. 6"	2	—	Quick Connect	310 lb	3102100	3TNH2
Cab Mount Bracket						
8 ft.	1	—	Swivel Snap Hook	310 lb	3101009	5KCY3
Ultra-Lok®						
3/16" dia. Galvanized Steel Cable						
20 ft.	1	Snap Hook	Swivel Snap Hook	310 lb	3504433	2UZZ6
30 ft.	1	Snap Hook	Swivel Snap Hook	310 lb	3504430	2UZZ5
50 ft.	1	Snap Hook	Swivel Snap Hook	310 lb	3504450	2UZZ7
85 ft.	1	Carabiner	Swivel Snap Hook	310 lb	3504485	3TNG6
3/16" dia. Stainless Steel Cable						
50 ft.	1	Carabiner	Swivel Snap Hook	310 lb	3504451	3TNG5
20 ft.	1	Carabiner	Swivel Snap Hook	310 lb	3504434	3TNG3
Ultra-Lok® RSQ, 3/16" Galvanized Steel Cable						
50 ft.	1	Carabiner	Swivel Snap Hook	310 lb	3504550	5KCX2
Sealed-Blok™, 3/16" Stainless Steel Cable						
15 ft.	1	Carabiner	Swivel Snap Hook	420 lb	3400827	3TNE7
30 ft.	1	Carabiner	Swivel Snap Hook	420 lb	3400802	3TNF1