



Door Selection Guide

Frame Handing—Select the proper handing.

Right Hand (RH)—Hinges are on the right, door is pushed in.


Left Hand (LH)—Hinges are on the left, door is pushed in.

Right Hand Reverse (RHR)—Hinges are on the right, door is pulled away.

Left Hand Reverse (LHR)—Hinges are on the left, door is pulled away.

- A. Measure from top of door to top of upper hinge.
B. Measure from top of door to top of middle hinge.
C. Measure from top of door to top of bottom hinge.
D. Measure from top of door to top of door edge cutout.
E. Measure from inside edge of header to the floor to determine door height.

Dim. A Top Hinge	Dim. B Middle Hinge	Dim. C Bottom Hinge	Dim. D Cylindrical Lock From Top	Dim. D Lockset From Top	Dim. E Door Height
Type 1					
6 1/2 in	37 3/8 in	68 3/8 in	36 1/2 in	34 1/8 in	80 in
6 1/2 in	39 in	72 1/2 in	40 1/2 in	38 1/8 in	84 in
Type 2					
4 1/2 in	35 1/2 in	65 1/2 in	38 3/4 in	35 1/2 in	80 in
4 1/2 in	37 1/2 in	69 1/2 in	42 3/4 in	39 1/2 in	84 in
Type 3					
7 3/8 in	37 3/8 in	67 1/4 in	38 7/8 in	35 3/8 in	80 in
7 3/8 in	39 3/8 in	71 1/4 in	42 7/8 in	39 3/8 in	84 in

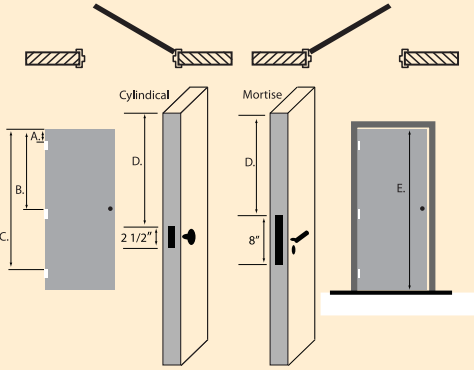


Flush Door Design




Door Designs:




Flush



Vision Lite



Narrow Lite



Half Glass

CecoDoor
ASSA ABLOY

Steel Doors

Steel face sheets are supported by kraft honeycomb core for exceptionally flat surfaces with high structural resistance to impact damage. Core has thermal insulation U-factor of 0.41. 1 3/4"-thick door is nonhanded and comes with a UL fire label. Prime painted and closer reinforced with 3 each of 4 1/2" x 4 1/2" x 0.134" or 0.180" hinge preparations.

Door available with either a Government 161 cylindrical lock prep with 2 3/4" backset, or an 86 edge only mortise lock prep. Doors with glass have a 1/4"-thick clear wire glass with safety film.

Note: Hinges, lockset, and closer are not included.

► Please choose:
Door Type: 1, 2, 3

► Please Choose:
Lock Type: Cylindrical, Mortise

Door Opening Height	Door Opening Width	FLUSH		VISION LITE		NARROW LITE		HALF GLASS	
		16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.
Doors Without Glass									
80 in	30 in	D3523	D3543	D3618	D3627	D3636	D3645	D3654	D3663
84 in	30 in	D3525	D3545	D3619	D3628	D3637	D3646	D3655	D3664
80 in	32 in	D3527	D3547	D3621	D3629	D3638	D3647	D3656	D3665
84 in	32 in	D3529	D3567	D3622	D3631	D3639	D3648	D3657	D3666
80 in	36 in	D3533	D3569	D3623	D3632	D3636	D3649	D3658	D3667
84 in	36 in	D3535	D3579	D3624	D3633	D3642	D3651	D3659	D3668
80 in	36 in					D3641			
80 in	48 in	D3537	D3582	D3625	D3634	D3643	D3652	D3661	D3669
84 in	48 in	D3539	D3584	D3626	D3635	D3644	D3653	D3662	D3671
Doors With Glass									
80 in	30 in	—	—	D3672	D3681	D3689	D3698	D3707	D3716
84 in	30 in	—	—	D3673	D3682	D3691	D3699	D3708	D3717
80 in	32 in	—	—	D3674	D3683	D3692	D3701	D3709	D3718
84 in	32 in	—	—	D3675	D3684	D3693	D3702	D3711	D3719
80 in	36 in	—	—	D3676	D3685	D3694	D3703	D3712	D3721
84 in	36 in	—	—	D3677	D3686	D3695	D3704	D3713	D3722
80 in	48 in	—	—	D3678	D3687	D3696	D3705	D3714	D3723
84 in	48 in	—	—	D3679	D3688	D3697	D3706	D3715	D3724



23Y727

SECURALL®

Quick-Mount
Steel Doors

Constructed of corrosion-resistant, galvanized steel. Prehung on 12 gauge, fully-welded subframes that are ready to install into preexisting steel door frames. All doors include 3 ball bearing hinges, threshold, a door closer, a set of weatherstripping with door sweep, and preinstalled hardware. H-series and R-series include an exit device and a lever trim with mortise cylinder. H-series includes a 22" W x 30" H or 34" H (for 84" H doors) view light with ceramic glass. P-series are full flush doors. R-series includes a 4" W x 25" H view light with ceramic glass.

Lock Type	Hand	Door Opening Height	Door Opening Width	Material	Item No.
H Series, 45 Min Fire Rated Door					
Push Bar Rim Exit Device With Locking Trim	RHR	80 in	36 in	16 Gauge Steel	23Y712
	LHR	80 in	36 in		23Y713
	RHR	84 in	36 in		23Y718
	LHR	84 in	36 in		23Y719
	RHR	80 in	36 in	18 Gauge Steel	23Y724
	LHR	80 in	36 in		23Y725
	RHR	84 in	36 in		23Y730
	LHR	84 in	36 in		23Y731
P Series, 1 ½ Hr. Fire Rated Door					
Mortise	RHR	80 in	36 in	16 Gauge Steel	23Y708
	LHR	80 in	36 in		23Y709
	RHR	84 in	36 in		23Y714
	LHR	84 in	36 in		23Y715
	RHR	80 in	36 in	18 Gauge Steel	23Y720
	LHR	80 in	36 in		23Y721
	RHR	84 in	36 in		23Y726
	LHR	84 in	36 in		23Y727
R Series, 1 ½ Hr. Fire Rated Door					
Push Bar Rim Exit Device With Locking Trim	RHR	80 in	36 in	16 Gauge Steel	23Y710
	LHR	80 in	36 in		23Y711
	RHR	84 in	36 in		23Y716
	LHR	84 in	36 in		23Y717
	RHR	80 in	36 in	18 Gauge Steel	23Y722
	LHR	80 in	36 in		23Y723
	RHR	84 in	36 in		23Y728
	LHR	84 in	36 in		23Y729