



Double Door Weatherstripping

Seals the space between wood and metal double doors.

Nylon Brush Insert—Mesh the insert together to seal a gap.


EPDM Insert—Overlaps to seal the gap. Sold in sets of 2 strips.

Pile Insert—Spring-loaded polypropylene insert adjusts in 1/8" increments for proper fit.

Solid Metal Flat Astragal—Mounts to stationary door. Covers gap between double doors.

Magnetic Insert—Seals gap between 80" to 96" doors with a magnet and detaches when door opens.

Flange Width	Insert Size	Projection	Flange Thickness	Max. Door Gap	8-FT. LENGTH Item No.	7-FT. LENGTH Item No.
Nylon Brush Insert						
Anodized Aluminum Flange						
3/8 in	1/8 in	1/4 in	3/16 in	1/8 in	2RRP4	—
3/8 in	1/8 in	1/4 in	3/16 in	3/4 in	3HRF7	—
Aluminum Flange						
3/8 in	1/8 in	1/4 in	3/16 in	1/8 in	—	2RRP5
EPDM Insert						
Anodized Aluminum Flange						
1 3/16 in	3/8 in	3/8 in	3/16 in	1/4 in	5MUL2	5MUL1
Dark Bronze Aluminum Flange						
1 3/16 in	3/8 in	3/8 in	3/16 in	1/4 in	5MUL4	5MUL3
Pile Insert						
Anodized Aluminum Flange						
7/16 in	1/8 in	9/16 in	1 1/16 in	3/16 in	3HRG2	3HRG1
Solid Metal Flat Astragal						
Primed-Finish Steel						
2 in	—	1/8 in	1/8 in	1/8 in	3HRH3	3HRH2
Primed-Aluminum						
2 in	—	1/8 in	—	1/8 in	2RRR5	—
Magnetic Insert						
Anodized Aluminum						
2 1/4 in	1/4 in	1 1/16 in	5/16 in	1/8 in	5MUK8	5MUK7

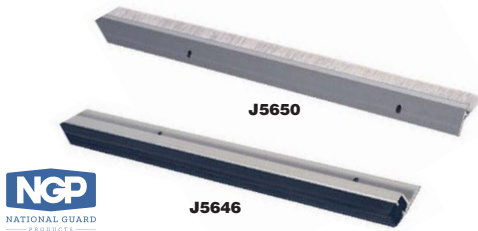

Adjustable Door Frame Weatherstripping

Adjustable door frame weatherstrip creates an interior sound seal on doors that do not sit plumb and square. Use with wood fire doors rated for 90 min. and metal fire doors rated for 3 hr.

Stays Flexible to	Flange Material	Insert Color	Flange Height	Insert Size	Projection	Flange Thickness	►CHOOSE: Overall Length	Item No.
Neoprene								
-20° to 200°F	Aluminum	Black	3/8 in	1/2 in	1 1/16 in	1/16 in	3 ft, 4 ft, 7 ft, 8 ft	J5646
-20° to 200°F	Stainless Steel	Black	1/4 in	1/4 in	3/8 in	1/32 in	3 ft, 4 ft, 7 ft, 8 ft	J5647
-20° to 200°F	Aluminum	Black	5/16 in	1/8 in	5/16 in	3/32 in	3 ft, 4 ft, 7 ft, 8 ft	J5648
-20° to 200°F	Stainless Steel	Black	1/4 in	1/8 in	3/16 in	1/32 in	7 ft, 8 ft	J5649
Nylon								
-70° to 425°F	Aluminum	Gray	5/16 in	1/2 in	5/8 in	1/16 in	3 ft, 4 ft, 7 ft, 8 ft	J5650
-70° to 425°F	Aluminum	Gray	5/16 in	1/2 in	5/8 in	1/16 in	3 ft, 4 ft, 7 ft, 8 ft	J5651
-70° to 425°F	Aluminum	Gray, Black	1/4 in	7/16 in	1/4 in	1/16 in	9 ft, 7 ft, 8 ft	J5652
Silicone								
—	Aluminum	Gray	—	1/4 in	1/2 in	1/16 in	7 ft, 4 ft	J5716
-100°F	Aluminum	Black	5/16 in	1/8 in	5/16 in	3/32 in	3 ft, 4 ft, 7 ft, 8 ft	J5653
-100°F	Aluminum	Gray	1/4 in	3/16 in	3/16 in	1/16 in	3 ft, 4 ft, 7 ft, 8 ft	J5654
-100°F	Aluminum	Black	5/16 in	5/16 in	5/16 in	1/16 in	3 ft x 7 ft, 6 ft x 7 ft, 8 ft x 7 ft, 3 ft, 4 ft, 7 ft, 8 ft	J5654
Vinyl								
0° to 140°F	Aluminum	Gray	1/4 in	1/4 in	1/4 in	1/16 in	3 ft, 4 ft, 7 ft, 8 ft	J5655
0° to 140°F	Aluminum	Gray	1/4 in	1/8 in	1/4 in	1/16 in	7 ft, 8 ft	J5656
0° to 140°F	Aluminum	Gray	5/16 in	3/16 in	3/16 in	1/16 in	3 ft x 7 ft, 6 ft x 7 ft, 7 ft	J5657
0° to 140°F	Aluminum	Gray	1/4 in	3/16 in	3/16 in	1/4 in	3 ft, 4 ft, 6 ft, 7 ft	J5658
0° to 140°F	Aluminum	Gray	1/4 in	3/16 in	3/16 in	1/4 in	3 ft, 4 ft, 6 ft, 7 ft	J5659



Door Frame Weatherstripping

Mounts on top and sides of door frame to seal gaps.

Adjustable—Creates an interior sound seal on doors that do not sit plumb and square. Use with wood fire doors rated for 90 min. and metal fire doors rated for 3 hr.

Corrosion-Resistant—Stainless steel flange holds up to harsh weather.

Flexible Nylon Brush—Dense fibers fill gaps and help keep out insects.

Hollow Bulb Inserts—Compress easily, stay flexible in extremely low temperatures.

Kerf—Conforms to irregular surfaces to create a tight seal. Installs in kerf-in door stop. For use with steel doors.

Magnetic—Flexible, vinyl-covered magnet seals against metal doors.

Sponge Insert—Material provides a dense, abrasion-resistant seal.



Overall Length	Flange Finish	Insert Color	Flange Height	Flange Thickness	Insert Size	Projection	Item No.	Overall Length	Flange Finish	Insert Color	Flange Height	Flange Thickness	Insert Size	Projection	Item No.
Adjustable, Neoprene w/Aluminum Flange															
3 ft	Aluminum	Black	—	—	—	—	5MUH1	4 ft	Clear	Black	—	—	—	—	3EGV9
4 ft	Aluminum	Black	1 1/4 in	1/2 in	1/4 in	1/2 in	5MUH2	7 ft	Clear	Black	3/8 in	3/16 in	3/16 in	3/16 in	3EGW2
6 ft	Dark Bronze	Black	—	—	—	—	5MUH7	8 ft	Clear	Black	—	—	—	—	3EGW3
7 ft	Aluminum	Black	—	—	—	—	5MUH4	Hollow Bulb, Silicone w/Anodized Aluminum Flange							
Corrosion Resistant, Neoprene w/Stainless Steel Flange								Hollow Bulb, Sponge Silicone w/Anodized Aluminum Flange							
3 ft	Brushed Stainless	Black	—	—	—	—	3HRV9	3 ft	Clear	Black	—	—	—	—	3EGW9
4 ft	Brushed Stainless	Black	1 3/4 in	1/2 in	1/2 in	3/8 in	3HRW1	4 ft	Clear	Black	3/4 in	1/16 in	1/4 in	1/4 in	3EGX1
7 ft	Brushed Stainless	Black	—	—	—	—	3HRW3	7 ft	Clear	Black	—	—	—	—	3EGX3
8 ft	Brushed Stainless	Black	—	—	—	—	3HRW4	8 ft	Clear	Black	—	—	—	—	3EGX4
Flexible Nylon Brush, Nylon Brush w/Anodized Aluminum Flange								Hollow Bulb, Vinyl w/Unfinished Aluminum Flange							
3 ft	Aluminum	Gray	—	—	—	—	5MKN5	3 ft	Clear	Gray	—	—	—	—	3EGX5
3 ft	Dark Bronze	Black	3/4 in	1/16 in	7/16 in	3/16 in	5MKN9	4 ft	Clear	Gray	1/2 in	1/16 in	1/4 in	1/4 in	3EGX6
4 ft	Aluminum	Gray	—	—	—	—	5MKN6	7 ft	Clear	Gray	—	—	—	—	3EGX8
4 ft	Dark Bronze	Black	—	—	—	—	5MKN9	8 ft	Clear	Gray	—	—	—	—	3EGX9
4 ft	Aluminum	Gray	—	—	—	—	5MKN6	Kerf, Polyurethane Foam							
4 ft	Dark Bronze	Black	—	—	—	—	5MKN9	81 in	—	White	1/2 in	1/4 in	1/2 in	1 3/16 in	2RRT3
6 ft	Aluminum	Gray	—	—	—	—	5MKN1	81 in	—	Brown	—	—	—	—	2RRT4
6 ft	Dark Bronze	Black	—	—	—	—	5MKN1	Kerf, TPR Vinyl Magnetic							
7 ft	Aluminum	Gray	—	—	—	—	5MKN8	16 1/2 ft	Mill	Beige	3/8 in	1/4 in	1/2 in	3/8 in	2RRP2 *
7 ft	Dark Bronze	Black	—	—	—	—	5MKN2	81 in	—	Brown	—	—	—	—	2RRP1 *
Flexible Nylon Brush, Nylon w/Anodized Aluminum Flange								Magnetic w/Anodized Aluminum Flange							
3 ft	Clear	Gray	—	—	—	—	3EGY6	3 ft	Clear	Black	—	—	—	—	3EGZ7
3 ft	Dark Bronze	Black	1/16 in	1/16 in	3/8 in	3/32 in	3EGZ2	3 ft	Dark Bronze	Black	—	—	—	—	3EGZ2
4 ft	Clear	Gray	—	—	—	—	3EGY7	4 ft	Clear	Black	—	—	—	—	3EGZ3
4 ft	Dark Bronze	Black	—	—	—	—	3EGZ3	4 ft	Dark Bronze	Black	1 1/8 in	1/16 in	3/16 in	3/8 in	3EGZ8
4 ft	Dark Bronze	Black	—	—	—	—	3EGZ5	4 ft	Dark Bronze	Black	—	—	—	—	3EGZ9
7 ft	Dark Bronze	Black	—	—	—	—	3EGZ5	7 ft	Dark Bronze	Black	—	—	—	—	3EGZ9
8 ft	Dark Bronze	Black	—	—	—	—	3EGZ6	8 ft	Dark Bronze	Black	—	—	—	—	3EGZ9
Hollow Bulb, Neoprene w/Anodized Aluminum Flange								Sponge, Polyurethane Foam w/Aluminum Flange							
3 ft	Clear	Black	7/8 in	3/16 in	3/16 in	3/16 in	3EGW4	17 ft	Powder Coated	Brown	1 1/8 in	1/4 in	3/4 in	3/8 in	2RRT2 †
3 ft	Aluminum	Black	—	—	—	—	5MKP3	17 ft	Mill	White	—	—	—	—	2RRT1 †
3 ft	Dark Bronze	Black	1 1/2 in	1/4 in	3/16 in	1/4 in	5MKP7	Sponge, Sponge Neoprene w/Anodized Aluminum Flange							
3 ft	Clear	Black	7/8 in	3/16 in	3/16 in	3/16 in	3EGW5	3 ft	Clear	Black	—	—	—	—	3EGY1
4 ft	Aluminum	Black	—	—	—	—	5MKP4	4 ft	Clear	Black	1 in	1/16 in	3/8 in	1 1/16 in	3EGY2
4 ft	Dark Bronze	Black	1 1/2 in	1/4 in	3/16 in	1/4 in	5MKP8	7 ft	Clear	Black	—	—	—	—	3EGY4
6 ft	Aluminum	Black	—	—	—	—	5MKP5	8 ft	Clear	Black	—	—	—	—	3EGY5
6 ft	Dark Bronze	Black	—	—	—	—	5MKP9	Vinyl w/Unfinished Aluminum Flange							
7 ft	Clear	Black	7/8 in	3/16 in	3/16 in	3/16 in	3EGW6	7 ft	—	Gray	7/8 in	3/16 in	3/32 in	3/32 in	1VZR8 †
7 ft	Aluminum	Black	—	—	—	—	5MKP6								
7 ft	Dark Bronze	Black	—	—	—	—	5MKR0								
8 ft	Clear	Black	7/8 in	3/16 in	3/16 in	3/16 in	3EGW8								

* Set includes two 82" side door strips and one 36" top door strip. † Set includes two 84" side strips and one 36" top strip.