




Exit Devices

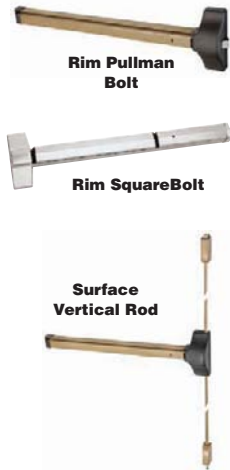

▪ **Nonhanded**
Nonfire-rated devices have a dogging feature that keeps the door unlatched, allowing traffic to enter and exit freely. "A" labeled fire doors. Fit 1 3/4"- and 2 1/4"-thick doors up to 7-ft. high. Include strike and mounting hardware. Heavy-duty devices have a hydraulic noise-dampening feature and a high-quality finish.

Rim Pullman Bolt—
Devices resist vandalism and have a 3/4" throw stainless steel latchbolt for single-point latching. A guardbolt deadlocks the latchbolt when door is closed and latched.

Rim Square Bolt—
Deadbolt-style, 1" throw latchbolt engages the roller strike with a flat surface for increased security. Stainless steel bolt design locks into place; resists shimming and door rattling/shaking.

Surface Vertical Rod—2-point locking exit devices have an automatic deadlocking upper latchbolt with 3/4" throw and lower deadbolt with 5/8" throw. For doors taller than 7 ft., order vertical rod extensions.



| Finish | 2 IN Item No. | 6 IN Item No. | 12 IN Item No. |
|---------------------|---------------|---------------|----------------|
| Stainless Steel 360 | 4AVD4 | 4AVD5 | 4AVE3 |
| Aluminum Painted | 4AVE1 | 4AVE2 | 4AVD6 |
| Bronze Painted | 4AVD7 | 4AVD8 | 4AVD9 |

| Description | Finish | Door W (in.) | FIRE RATED Item No. | NON-FIRE RATED Item No. |
|-----------------------------------|-----------------|--------------|---------------------|-------------------------|
| Heavy-Duty, 7100 Series | | | | |
| Rim Pullman Bolt | | 30 to 36 | 5T796 | 5T794 |
| Rim Square Bolt | Stainless Steel | 30 to 36 | 3ZV64 | 3ZV63 |
| Surface Vertical Rod | | 30 to 36 | 5T797 | 5T795 |
| Standard-Duty, 2100 Series | | | | |
| Rim Pullman Bolt | Stainless Steel | 30 to 36 | 1ABK4 | 1ABK3 |
| | Lacquer | 30 to 36 | 1ABK5 | — |
| | Aluminum | 30 to 36 | — | 1H820 |
| Rim Square Bolt | Painted | 30 to 36 | 1ABK6 | 1H819 |
| | Stainless Steel | 30 to 36 | 1ABL3 | 1ABL2 |
| | Lacquer | 30 to 36 | 1ABL5 | 1ABL4 |
| Surface Vertical Rod | Painted | 30 to 36 | 1ABL7 | 1ABL6 |
| | Stainless Steel | 30 to 36 | 1ABL1 | 1H818 |
| | Lacquer | 30 to 36 | 1ABK9 | 1H817 |
| Standard-Duty, 1800 Series | | | | |
| Rim Pullman Bolt | Lacquer | 30 to 36 | 5VRW9 | 5VRV7 |
| | | 36 to 42 | 5VRX0 | 5VRV8 |
| | | 42 to 48 | 5VRX1 | 5VRV9 |
| | Bronze | 30 to 36 | 5VRX2 | 5VRW0 |
| | | 36 to 42 | 5VRX3 | 5VRW1 |
| | | 42 to 48 | 5VRX4 | 5VRW2 |
| | Lacquer | 30 to 36 | 5VRX5 | 5VRW3 |
| | | 36 to 42 | 5VRX6 | 5VRW4 |
| | | 42 to 48 | 5VRX7 | 5VRW5 |
| Surface Vertical Rod | Bronze | 30 to 36 | 5VRX8 | 5VRW6 |
| | | 36 to 42 | 5VRX9 | 5VRW7 |
| | | 42 to 48 | 5VRY0 | 5VRW8 |




Exit Devices and Trim

- Thru-bolt trim design for increased security and durability
- For doors 32" to 36"W

Use in school, healthcare, industrial, office, and multifamily housing facilities. Hex dogging and cylinder dogging lock down the device bar so the latch remains retracted and the door can swing freely. Hex dogging locks down the bar with the use of a hex key. Cylinder dogging uses a keyed cylinder for increased access control.

Standard-duty devices tested to over 500,000 cycles and exceed requirements for Grade 1 certification.

| Description | Finish | Item No. |
|---|----------|----------|
| Exit Devices | | |
| Rim Exit Device, Cylinder Dogging | Aluminum | 2WHH9 |
| Standard Rim | Aluminum | 2WHH5 |
| Standard Rim, Fire Rated | Aluminum | 2WHH4 |
| Standard Surface Vertical Rod | Aluminum | 2WHH3 |
| Standard Surface Vertical Rod, Fire Rated | Aluminum | 2WHH2 |
| Surface Vertical Rod, Cylinder Dogging | Aluminum | 2WHH8 |
| Exit Device Trim | | |
| Passage Lever | Aluminum | 2WHG8 |
| Entry Lever | Aluminum | 2WHG9 |
| Nightlatch Lever | Aluminum | 2WHH1 |
| Gull Wing Pull | Aluminum | 2WHH6 |
| Rose Lever, Classroom | Aluminum | 5PHH0 |
| Rose Lever, Classroom, SFIC | Aluminum | 5PHH1 |
| Rose Lever, Storeroom | Aluminum | 5PHH2 |
| Rose Lever, Storeroom, SFIC | Aluminum | 5PHH4 |

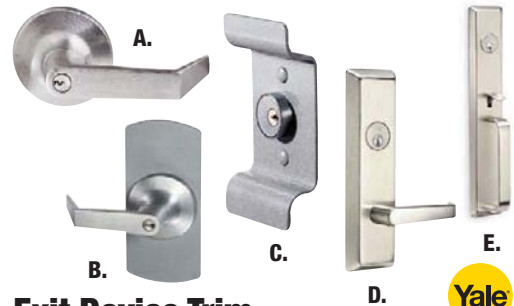

Exit Device Trim

Prepped to fit Yale 7100, 2100, and 1800 Series exit devices. When exit device is unlocked, the 6-pin cylinder retracts the latchbolt. Lever is Augusta-style and freewheeling to resist vandalism. 4UB37 is a bored lock prep that locks the exit device unless unlocked with a key.

| Key | Description | Finish | Item No. |
|-----|-------------------------------------|--------------------|----------|
| A | Cylindrical by Lever | Satin Chrome | 1H813 |
| A | Cylindrical by Lever | Baked Aluminum 689 | 3ZV42 |
| B | Cylindrical by Lever with Plate | Baked Aluminum 689 | 4UB37 |
| C | Pull Plate | Baked Aluminum 689 | 1H816 |
| D | Escutcheon by Lever, Right Hand | Stainless Steel | 5T804 |
| D | Escutcheon by Lever, Left Hand | Stainless Steel | 5T805 |
| D | Escutcheon by Handle | Stainless Steel | 5T799 |
| E | Escutcheon by Thumbpiece and Handle | Stainless Steel | 5T801 |



Heavy-Duty Exit Devices



Chassis are constructed from investment cast steel. Universal mounting holes provide an easy retrofit installation. Designed for single and double door applications. 2100 Series devices are nonhanded.

| Description | Finish | Door Height | Door Width | Fits Stile Width | For Door Thickness | Fire Rated | Item No. |
|-------------------------|-----------------------|--------------|------------|------------------|----------------------|------------|----------|
| Rod, 2200 Series | | | | | | | |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR63 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR64 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR65 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR66 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | No | 35GR68 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | No | 35GR69 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | No | 35GR70 |

| Description | Finish | Door Height | Door Width | Fits Stile Width | For Door Thickness | Fire Rated | Item No. |
|-------------------------|-----------------------|--------------|------------|------------------|----------------------|------------|----------|
| Rim, 2100 Series | | | | | | | |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR71 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR72 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR73 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | Yes | 35GR74 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 48 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | No | 35GR76 |
| Exit Device | Satin Stainless Steel | Up to 120 in | 36 in | 4 1/8 in | 1 3/4 in to 2 1/4 in | No | 35GR77 |



Exit Devices and Trim, Grade 1

- Fit 1 3/4"-thick doors
- 19 Series

Suitable for all doors where there is no projection on the face. Can be sized down to fit the required width of the door and used with a variety of exit device trims. Include sheet metal and machine screws.

| Description | Finish | Door Width | Item No. |
|-------------------------|-----------------|----------------|----------|
| Exits | | | |
| Touchbar Rim | Aluminum | 37 in to 48 in | 5TUN1 |
| Touchbar Rim | Aluminum | 36 in | 5TUN2 |
| Exit Trim | | | |
| Lever w/Lock | Aluminum | — | 5TUN3 |
| Knob w/Lock | Stainless Steel | — | 5TUN4 |
| Night Latch Pull w/Lock | Aluminum | — | 5TUN5 |