


1-800-GRAINGER (472-4643)

Door Selection Guide

Frame Handing - Select the proper handing.
Right Hand (RH) - Hinges are on the right, door is pushed in.
Left Hand (LH) - Hinges are on the left, door is pushed in.

Right Hand Reverse (RHR) - Hinges are on the right, door is pulled away.
Left Hand Reverse (LHR) - Hinges are on the left, door is pulled away.

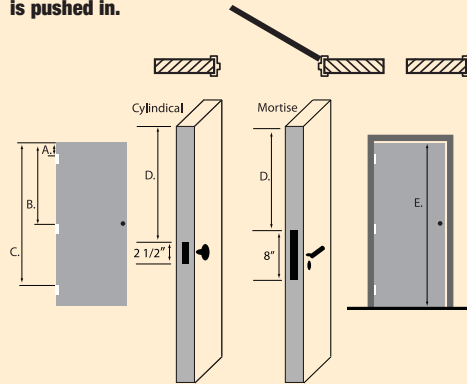

- A. Measure from top of door to top of upper hinge.
- B. Measure from top of door to top of middle hinge.
- C. Measure from top of door to top of bottom hinge.
- D. Measure from top of door to top of door edge cutout.
- E. Measure from inside edge of header to the floor to determine door height.

Door Frames

- 5-3/4" overall jamb depth with a 4 7/8" throat opening
 - Shipped unassembled
- 16-ga. cold-rolled steel frame has a 2" face and die-cut mitered corners. Prepped for 3 each of 4 1/2" x 4 1/2" x 0.134" or 0.180" hinges and a 4 7/8" ASA universal strike and closer reinforcement. Identify door swing by standing with door swinging forward; if the hinges are on the left, the model is a left-hand door.

Door Designs:

Dim. A Top Hinge (in.)	Dim. B Middle Hinge (in.)	Dim. C Bottom Hinge (in.)	Dim. D Cylindrical Lock From Top (in.)	Dim. D Lockset From Top (in.)	Dim. E Door Height (in.)
Type 1					
6 5/8"	37%	68%	36 1/16"	34 1/16"	80
6 5/8"	39%	72%	40 1/16"	38 1/16"	84
Type 2					
4 1/2"	35 1/2"	65 1/2"	38 3/4"	35 3/8"	80
4 1/2"	37 1/2"	69 1/2"	42 3/4"	39 3/8"	84
Type 3					
7 1/2"	37 5/16"	67 1/4"	38 1/16"	35 5/16"	80
7 1/2"	39 5/16"	71 1/4"	42 1/16"	39 5/16"	84

Steel Doors



Steel face sheets are supported by kraft honeycomb core for exceptionally flat surfaces with high structural resistance to impact damage. Core has thermal insulation U-factor of 0.41. 1 3/4"-thick door is nonhanded and comes with a UL fire label. Prime painted and closer reinforced with 3 each of 4 1/2" x 4 1/2" x 0.134" or 0.180" hinge preparations.

Door available with either a Government 161 cylindrical lock prep with 2 3/4" backset, or an 86 edge only mortise lock prep. Doors with glass have a 1/4"-thick clear wire glass with safety film.


Note: Hinges, lockset, and closer are not included.

► Please Choose: Door Type: 1, 2, 3


► Please Choose: Lock Type: Cylindrical, Mortise



Flush Door Design



Flush Vision Lite



Narrow Lite Half Glass

Door Opening Width	Door Opening Height	FLUSH		VISION LITE		NARROW LITE		HALF GLASS	
		16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.	16 GA. Item No.	18 GA. Item No.
Doors Without Glass									
30 in	80 in	D3523	D3543	D3618	D3627	D3636	D3645	D3654	D3663
30 in	84 in	D3525	D3545	D3619	D3628	D3637	D3646	D3655	D3664
32 in	80 in	D3527	D3547	D3621	D3629	D3638	D3647	D3656	D3665
32 in	84 in	D3529	D3549	D3622	D3631	D3639	D3648	D3657	D3666
36 in	80 in	D3533	D3569	D3623	D3632	D3636	D3649	D3658	D3667
36 in	84 in	D3535	D3579	D3624	D3633	D3642	D3651	D3659	D3668
36 in	80 in	—	—	—	—	D3641	—	—	—
48 in	80 in	D3537	D3582	D3625	D3634	D3643	D3652	D3661	D3669
48 in	84 in	D3539	D3584	D3626	D3635	D3644	D3653	D3662	D3671
Doors With Glass									
30 in	80 in	—	—	D3672	D3681	D3689	D3698	D3707	D3716
30 in	84 in	—	—	D3673	D3682	D3691	D3699	D3708	D3717
32 in	80 in	—	—	D3674	D3683	D3692	D3701	D3709	D3718
32 in	84 in	—	—	D3675	D3684	D3693	D3702	D3711	D3719
36 in	80 in	—	—	D3676	D3685	D3694	D3703	D3712	D3721
36 in	84 in	—	—	D3677	D3686	D3695	D3704	D3713	D3722
48 in	80 in	—	—	D3678	D3687	D3696	D3705	D3714	D3723
48 in	84 in	—	—	D3679	D3688	D3697	D3706	D3715	D3724

SECURALL®

Quick-Mount Steel Doors

Constructed of corrosion-resistant, galvanized steel. Prehung on 12 gauge, fully-welded subframes that are ready to install into preexisting steel door frames. All doors include 3 ball bearing hinges, threshold, a door closer, a set of weatherstripping with door sweep, and preinstalled hardware. H-series and R-series include an exit device and a lever trim with mortise cylinder. H-series includes a 22" W x 30" H or 34" H (for 84" H doors) view light with ceramic glass.

R-series includes a 4" W x 25" H view light with ceramic glass. P-series are full flush doors.



23Y727

Lock Type	Hand	Door Opening Height	Door Opening Width	Material	Item No.
H Series, 45 Min Fire Rated Door					
Push Bar Rim Exit	RHR	80 in	36 in	16 Gauge Steel	23Y712
	LHR	80 in	36 in		23Y713
	RHR	84 in	36 in		23Y718
	LHR	84 in	36 in		23Y719
Device With Locking Trim	RHR	80 in	36 in	18 Gauge Steel	23Y724
	LHR	80 in	36 in		23Y725
	RHR	84 in	36 in		23Y730
	LHR	84 in	36 in		23Y731
P Series, 1 1/2 Hr. Fire Rated Door					
Mortise	RHR	80 in	36 in	16 Gauge Steel	23Y708
	LHR	80 in	36 in		23Y709
	RHR	84 in	36 in		23Y714
	LHR	84 in	36 in		23Y715
Mortise	RHR	80 in	36 in	18 Gauge Steel	23Y720
	LHR	80 in	36 in		23Y721
	RHR	84 in	36 in		23Y726
	LHR	84 in	36 in		23Y727
R Series, 1 1/2 Hr. Fire Rated Door					
Push Bar Rim Exit Device With Locking Trim	RHR	80 in	36 in	16 Gauge Steel	23Y710
	LHR	80 in	36 in		23Y711
	RHR	84 in	36 in		23Y716
	LHR	84 in	36 in		23Y717
Device With Locking Trim	RHR	80 in	36 in	18 Gauge Steel	23Y722
	LHR	80 in	36 in		23Y723
	RHR	84 in	36 in		23Y728
	LHR	84 in	36 in		23Y729

Steel Doors with Louvers

■ 1 3/4"-thick doors

Doors help to improve ventilation and heat transfer in and out of storage areas while maintaining privacy. Suitable for use in boiler rooms, cleaning closets, restrooms, and storage closets where heat or fumes can accumulate.



Door Opening Width	Door Opening Height	► CHOOSE: Door Type	► CHOOSE: Lock Type	12 X 12 IN LOUVERS Item No.	24 X 12 IN LOUVERS Item No.	24 X 24 IN LOUVERS Item No.	24 X 60 IN LOUVERS Item No.
36 in	80 in	1, 2, 3	Cylindrical, Mortise	D2855	D2861	D2863	D2865
36 in	84 in	1, 2, 3	Cylindrical, Mortise	D2856	D2862	D2864	D2866
48 in	80 in	1, 2, 3	Cylindrical, Mortise	D4276	D4278	D4281	D4283
48 in	84 in	1, 2, 3	Cylindrical, Mortise	D4277	D4279	D4282	D4284



D2855