



Face-Mount Overhead Door Seals

Mount to overhead doors and docks to help keep out dust and drafts. Neoprene inserts.

Flat Insert—Mount on bottom or edge of door. Seals require min. 3/4" space between door and floor.

Looped Insert—Mount on bottom of door.

L (ft.)	Flange Height (in.)	Flange Material	Insert Size	Projection (in.)	Mr. Model	Item No.
Neoprene Flat Insert						
6	7/8	Steel	1 1/2 in	1/4	197NA-6	3HRV3
8	7/8	Steel	1 1/2 in	1/4	197NA-8	3HRV4
10	7/8	Steel	1 1/2 in	1/4	197NA-10	3HRV5
12	7/8	Steel	1 1/2 in	1/4	197NA-12	3HRV6
Neoprene Looped Insert						
10	1 1/8	Aluminum	1 3/8 in	1 1/8	81369N-10	3HRV7
15	1 1/8	Aluminum	1 3/8 in	1 1/8	81369N-15	3HRV8



Base-Mount Overhead Door Seals

Mount to overhead door bottoms to seal gaps up to 3/4" between door and floor. Seals remain flexible to -20°F. 3CEX9 includes two 4 1/2-ft. aluminum flanges and one 9-ft. long rubber insert.

3CEY1 includes four 4 1/2-ft. aluminum flanges and one 18-ft. long rubber insert.

L (ft.)	Flange Width (in.)	Flange Height (in.)	Insert Size	Insert Material	Includes	Item No.
Aluminum Flange						
9	1 3/8	1/4	3/4 in	TPE Rubber	(2) 4 1/2 ft Metal Flanges, #6 x 3/4 in Stainless Steel Sheet Metal Screws, 9 ft Long Neoprene Insert	3CEX9
18	1 3/8	1/4	3/4 in	TPE Rubber	(4) 4 1/2 ft Metal Flanges, #6 x 3/4 in Stainless Steel Sheet Metal Screws, 18 ft Long Neoprene Insert	3CEY1
No Flange						
9	2	1	1 1/4 in	TPE Rubber	(1) Black Plastic Cap, (18) 1 in Nails	2RR9
16	2	1	1 1/4 in	TPE Rubber	(36) 1 in Nails, 1 in Black Plastic Cap	2RR1
100	2	1	1 1/4 in	TPE Rubber	—	2RR2

Door Sweeps

Fill the gap below the door and help keep out drafts, light, dust, and weather. Mounting holes included. For inside or outside applications on residential and commercial doors.

A. Single-Fin—Seal door and threshold gaps up to 3/4". Neoprene and EPDM material resist weather

and remain flexible in cold temperatures.


B. Triple-Fin—Multiple layers provide a positive seal for uneven floors. Seal gaps up to 3/4".

C. Nylon Brush Insert—Fibers fill gaps and sweep dirt, insects, and snow away from door. Oak flange can be painted or stained.

D. Reinforced Neoprene Insert, Looped—Create dead air space to insulate against drafts and hold sweep tightly against floor.

E. Drip Cap—Divert rain and debris away from door.

F. Spring-Loaded Door Bottom—Spring lowers door sweep automatically when door is closed. For use on swing-in doors.

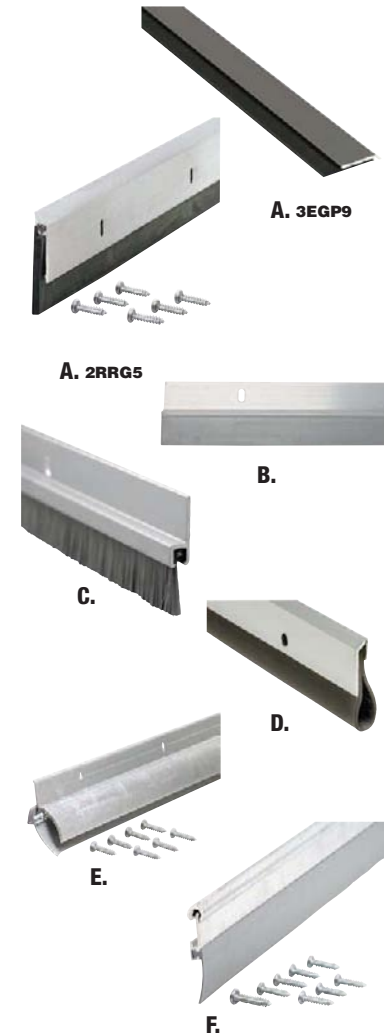

Key	Flange Material	Flange Height (in.)	Insert Size	Projection (in.)	3-FT. LENGTH Item No.	4-FT. LENGTH Item No.
Single-Fin, Vinyl Insert						
A	Aluminum	3/4	7/8 in	1/4	—	3EGU3
A	Aluminum	1 3/16	1 3/32 in	1/4	—	2RRG4
Single-Fin, Neoprene Insert						
A	Anodized Aluminum	1 1/4	7/16 in	1/4	3EGP9	3EGR1
A	Anodized Aluminum	1	2 in	3/8	5MUK1	5MUK2
A	Dark Bronze Aluminum	1 1/4	7/16 in	1/4	3EGR2	3EGR3
A	Dark Bronze Aluminum	1	2 in	3/8	5MUK3	5MUK4
A	Stainless Steel	1 1/4	5/16 in	3/16	3EGT5	3EGT6
Single-Fin, EPDM Rubber Insert						
A	Aluminum	1 3/16	1 9/16 in	1 5/16	2RRG5 *	—
A	Dark Brown Aluminum	1 3/16	1 5/16 in	1 5/16	2RRG7 *	2RRG8 *
Triple-Fin, Vinyl Insert						
B	Aluminum	2 3/32	7/8 in	1 5/16	1VZT1	—
B	White Aluminum	2 3/32	3/8 in	1 5/16	1VZT2	—
B	Hardwood	1 1/4	1 in	1/4	2RRH1	—
B	Bronze	2 3/32	7/8 in	1 5/16	1VZT3	—
Nylon Brush Insert						
C	Anodized Aluminum	3/4	5/8 in	1/4	3EGR6	3EGR7
C	Dark Bronze Aluminum	3/4	5/8 in	1/4	3EGT7	3EGT8
C	Anodized Aluminum	7/8	5/8 in	1/4	3EGT1	3EGT2
C	Unfinished Oak Wood	1	9/16 in	3/8	3EGT4	—
C	Unfinished Oak Wood	—	1 5/16 in	3/8	3EGT3	—
C	Aluminum	5/8	7/16 in	3/16	—	2RRH3 *
Reinforced Neoprene Insert, Looped						
D	Anodized Aluminum	3/4	1 in	1/4	3HRH8	3HRH9
Drip Cap, Vinyl Insert						
E	Aluminum	1 1/2	1 1 5/16 in	3/8	2RRH6 *	—
Drip Cap, Nylon Brush Insert						
E	Aluminum	1 1/2	7/16 in	3/16	—	3EGR5
E	Bronze	1 3/8	9/16 in	1 5/16	2RRH9	—
Spring-Loaded Door Bottom, Vinyl Insert						
F	Aluminum	1 1/2	7/8 in	1 1/2	2RRJ1	—
Key	Flange Material	Flange Height (in.)	Insert Size	Projection (in.)	7-FT. LENGTH Item No.	8-FT. LENGTH Item No.
Nylon Brush Insert, Looped						
C	Anodized Aluminum	3/4	5/8 in	1/4	3EGR8	3EGR9
Rubber Insert, Looped						
D	Anodized Aluminum	3/4	1 in	1/4	3HRJ1	3HRJ2

* UL Classified.



Door Sweeps

Keep out drafts, dust and debris from below doors. Anodized aluminum construction.

Insert Size	Flange Height	Projection	3 ft LENGTH Item No.	4 ft LENGTH Item No.
Single Fin Neoprene				
7/16 in	1 1/4 in	3/8 in	44ZZ69	45AA68
1/2 in	1 1/8 in	1/4 in	45AD19	45AE23
1 in	7/8 in	3/8 in	—	45AC46
1 3/8 in	1 1/4 in	3/8 in	45AD72	—
Single Fin Vinyl				
3/4 in	1 1/8 in	1/4 in	45AA15	45AD78