


1-800-GRAINGER (472-4643)



I-Shaped

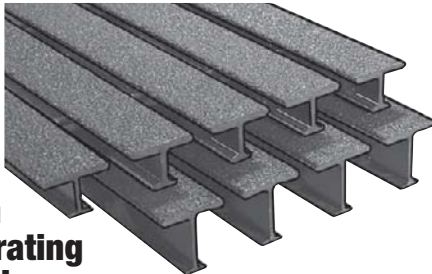

T-Shaped




Safe-T-Span Pultruded Grating & Stair Tread

- Grit top

Nonconductive, lightweight grating is manufactured from a fire-retardant isophthalic polyester resin system (ISOFR). Corrosion- and slip-resistant material replaces steel bar grating. A high percentage of glass provides durability and high unidirectional strength and stiffness, making this the ideal solution for applications where longer support spans are required. Supports loads in the span direction only.

| Span | Bearing Bar Width | Spacing Center-to-Center | 2 FT W Item No. | 3 FT W Item No. | 4 FT W Item No. | | |
|---|-------------------|--------------------------|--------------------|-----------------|-----------------|--------------------------|----------|
| Industrial Pultruded Grating | | | | | | | |
| I4010, 1 in Depth, Dark Gray | | | | | | | |
| 12 ft. | 0.6 in | 1 in | — | 49AL23 | — | | |
| I4010, 1 in Depth, Yellow | | | | | | | |
| 10 ft. | 0.6 in | 1 in | — | 49AL04 | 49AL07 | | |
| 12 ft. | 0.6 in | 1 in | — | — | 49AL08 | | |
| I4015, 1 1/2 in Depth, Yellow | | | | | | | |
| 8 ft. | 0.6 in | 1 in | — | — | 49AL15 | | |
| I6010, 1 in Depth, Dark Gray | | | | | | | |
| 8 ft. | 0.6 in | 1 1/2 in | — | 49AK84 | — | | |
| 10 ft. | 0.6 in | 1 1/2 in | — | — | 49AK88 | | |
| 12 ft. | 0.6 in | 1 1/2 in | — | 49AK86 | — | | |
| I6010, 1 in Depth, Yellow | | | | | | | |
| 3 ft. | 0.6 in | 1 1/2 in | 4AU9 | 4AU8 | 4AUD1 | | |
| 4 ft. | 0.6 in | 1 1/2 in | 4AUC4 | 4AU3 | 4AUC5 | | |
| 5 ft. | 0.6 in | 1 1/2 in | 4AUC7 | 4AUC2 | 4AUC8 | | |
| 6 ft. | 0.6 in | 1 1/2 in | 4AUC3 | 4AUC6 | 4AUC9 | | |
| 8 ft. | 0.6 in | 1 1/2 in | 4UA6 | 4AUC1 | 4UA4 | | |
| 10 ft. | 0.6 in | 1 1/2 in | — | 4UA2 | 4UA5 | | |
| I6015, 1 1/2 in Depth, Dark Gray | | | | | | | |
| 8 ft. | 0.6 in | 1 1/2 in | — | 49AK93 | — | | |
| 12 ft. | 0.6 in | 1 1/2 in | — | 49AK95 | — | | |
| I6015, 1 1/2 in Depth, Yellow | | | | | | | |
| 3 ft. | 0.6 in | 1 1/2 in | 4AUE4 | 4AUD8 | 4AUE9 | | |
| 4 ft. | 0.6 in | 1 1/2 in | 4AUD9 | 4AUD3 | 4AUE1 | | |
| 5 ft. | 0.6 in | 1 1/2 in | 4AUE6 | 4AUE8 | 4AUF1 | | |
| 6 ft. | 0.6 in | 1 1/2 in | 4AUD4 | 4AUD6 | 4AUE7 | | |
| 8 ft. | 0.6 in | 1 1/2 in | — | 4AUE3 | 4AUE2 | | |
| 10 ft. | 0.6 in | 1 1/2 in | — | 4AUD2 | 4AUD7 | | |
| T5020, 2 in Depth, Dark Gray | | | | | | | |
| 8 ft. | 1 in | 2 in | — | — | 49AL42 | | |
| T5020, 2 in Depth, Yellow | | | | | | | |
| 3 ft. | 1 in | 2 in | 4AUH3 | 4AUF8 | 4AUH8 | | |
| 4 ft. | 1 in | 2 in | 4AUH5 | 4AUJ1 | 4AUF2 | | |
| 5 ft. | 1 in | 2 in | 4AUF5 | 4AUF6 | 4AUF7 | | |
| 6 ft. | 1 in | 2 in | 4AUF9 | 4AUH9 | 4AUF4 | | |
| 8 ft. | 1 in | 2 in | — | 4AUH1 | 4AUF3 | | |
| 10 ft. | 1 in | 2 in | — | 4AUF6 | 4AUH2 | | |
| Pedestrian Pultruded Grating | | | | | | | |
| T2510, 1 in Depth, Dark Gray | | | | | | | |
| 3 ft. | 1.5 in | 2 in | 4AUJ3 | 4AUJ5 | 4AUK9 | | |
| 4 ft. | 1.5 in | 2 in | 4AUJ2 | 4AUK5 | 4AUJ8 | | |
| 5 ft. | 1.5 in | 2 in | 4AUK7 | 4AUK3 | 4AUK8 | | |
| 6 ft. | 1.5 in | 2 in | 4AUK4 | 4AUK6 | 4AUJ7 | | |
| 8 ft. | 1.5 in | 2 in | — | 4AUJ4 | 4AUK2 | | |
| 10 ft. | 1.5 in | 2 in | — | 4AUJ9 | 4AUK1 | | |
| T2515, 1 1/2 in Depth, Dark Gray | | | | | | | |
| 3 ft. | 1.5 in | 2 in | 4AUN8 | 4AUL3 | 4AUN9 | | |
| 4 ft. | 1.5 in | 2 in | 4AUN1 | 4AUL7 | 4AUN2 | | |
| 5 ft. | 1.5 in | 2 in | 4AUL4 | 4AUN3 | 4AUN7 | | |
| 6 ft. | 1.5 in | 2 in | 4AUN6 | 4AUN4 | 4AUN1 | | |
| 8 ft. | 1.5 in | 2 in | — | 4AUL5 | 4AUL9 | | |
| 10 ft. | 1.5 in | 2 in | — | 4AUL2 | 4AUN5 | | |
| W | D | Bearing Bar Width | Bearing Bar Height | Mesh | Mesh Size | Color | Item No. |
| Safe-T-Span® Stair Tread | | | | | | | |
| 2 ft | 10 1/2 in | 0.6 in | 1 in | Rectangular | 1 1/2 x 6 in | Yellow With Black Nosing | 4AUP2 |
| 2 ft | 10 1/2 in | 0.6 in | 1 1/2 in | | | | 4AUP5 |
| 2 1/2 ft | 10 1/2 in | 0.6 in | 1 in | | | | 4AUP3 |
| 2 1/2 ft | 10 1/2 in | 0.6 in | 1 1/2 in | | | | 4AUP4 |
| 3 ft | 10 1/2 in | 0.6 in | 1 1/2 in | | | | 4AUP6 |
| 3 ft | 10 1/2 in | 0.6 in | 1 1/2 in | | | | 4AUP6 |

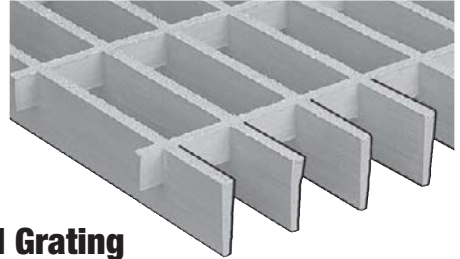


Rigidex Moltruded Grating

- Convex polyester resin
- 1 1/2" thick
- Light gray

Light-duty grating has large openings that allow greater airflow. For walkways and platforms.

| Mesh Size | Clear Span (in.) | 50 | 65 | 100 | 200 | Max Recommended Load (psf) | Ultimate Capacity (psf) |
|-----------------------|-------------------|--------------------------|----------|----------|-----------------|----------------------------|-------------------------|
| 1 1/2 x 4" | 36 | 0.08 | 0.11 | 0.17 | 0.34 | 845 | 1690 |
| Span | Bearing Bar Width | Spacing Center-to-Center | | | 2 FT W Item No. | 3 FT W Item No. | 4 FT W Item No. |
| 1 1/2 in Depth | | | | | | | |
| 3 ft. | 0.27 in | 1 1/2 in | 1 1/2 in | 1 1/2 in | 4AUP7 | 4AUR1 | 4AUR4 |
| 4 ft. | 0.27 in | 1 1/2 in | 1 1/2 in | 1 1/2 in | 4AUP8 | 4AUR2 | 4AUR5 |
| 6 ft. | 0.27 in | 1 1/2 in | 1 1/2 in | 1 1/2 in | 4AUP9 | 4AUR3 | 4AUR6 |
| 8 ft. | 0.27 in | 1 1/2 in | 1 1/2 in | 1 1/2 in | — | — | 4AUR7 |

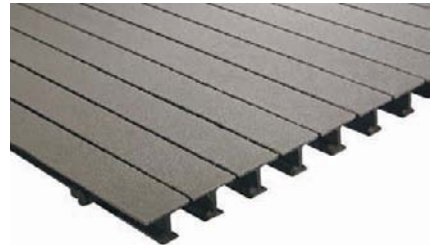


Aqua Grate

- Light gray

Lightweight, pultruded pedestrian grating withstands corrosion. Helps provide safety and comfort for walking with bare feet in high-traffic, public recreational areas. Fine grit surface provides a high level of slip resistance. Protection against long-term UV exposure is provided by a synthetic surfacing veil and UV inhibitors in the resin formulation. Features nominal 1/4" space between the 1 1/2" wide bearing bars.

| W | Span | Spacing Ctr.-to-Ctr. | Item No. |
|----------------------------|--------|----------------------|----------|
| T1210, 1" Depth | | | |
| 3 ft | 10 ft. | 1 23/32 in | 49AK67 |
| 4 ft | 8 ft. | 1 23/32 in | 49AK69 |
| 5 ft | 10 ft. | 1 23/32 in | 49AK73 |
| T1215, 1 1/2" Depth | | | |
| 3 ft | 8 ft. | 1 23/32 in | 49AK75 |

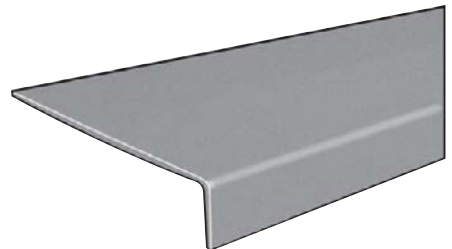

Molded Stair Tread Covers

- A/O grit surface
- 1/8" thick
- Convex

Can be fabricated and installed over existing steps to provide a slip-resistant walking surface. Corrosion resistant. OSHA approved with yellow nosing.

| W | D | Item No. | W | D | Item No. |
|-------------------------------------|-------|----------|--------|-------|----------|
| Dark Gray | | | | | |
| 3 ft | 12 in | 16U527 | 3 ft | 12 in | 16U530 |
| 4 ft | 12 in | 16U526 | 4 ft | 12 in | 16U529 |
| 12 ft | 12 in | 16U525 | 12 ft | 12 in | 16U528 |
| Dark Gray with Yellow Nosing | | | | | |
| 36 in | 12 in | 4ATZ2 | 144 in | 10 in | 4ATZ6 |
| 48 in | 12 in | 4ATZ3 | 144 in | 12 in | 4ATZ7 |
| Light Gray | | | | | |
| Yellow | | | | | |
| 10 in | 10 in | 4ATY8 | 3 ft | 12 in | 16U533 |
| 11 in | 11 in | 4ATY9 | 4 ft | 12 in | 16U532 |
| 12 in | 12 in | 4ATZ1 | 12 ft | 12 in | 16U531 |