


Find Back-Up Pads on page 2259







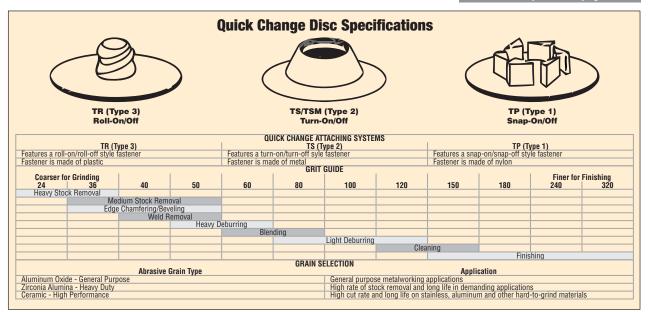



MERIT 3M ARC (1)

General Purpose Quick-Change Cloth Discs

 Aluminum oxide abrasive Quick-change attachment system helps minimize downtime and improve productivity.


Norton Neon R766—Discs feature Y-weight polyester cloth backing and are excellent for stock removal, leveling, and blending applications on both contoured and flat metal surfaces.


Norton Metalite R228-X-weight cloth backing. Use for general purpose applications.

Merit-For general use, including blending light welds, breaking edges, and removing parting lines and machine marks. Abrasive surface is laminated to a tough backing for exceptional durability.

3M 361F—For deburring, blending, leveling, and finishing all types of materials. Lock securely and unlock easily with just a half twist. Resin bonded for heat resistance. Heavy-duty cloth backing.

ARC Abrasives, Inc. A0 Series-Y-weight backing. Use for general purpose grinding.





J0701

Disc	►CHOOSE:		Disc Attachment	Item	Pkg.
Diameter	Grit	Max. RPM	Туре	No.	Qty.
TR System, F	Roll-On/Off		- 1		
Merit					
1 ½ in	36, 50, 60, 80, 120, 180	30,000 RPM	Type 3	J0760	100
1 in	80, 120	40,000 RPM	Type 3	J0757	100
2 in —	24	30,000 RPM	Type 3	1EDL4	100
	180	30,000 RPM	Type 3	J0767	100
3 in	240	20,000 RPM	Type 3	1EDU8	50
ARC AO Serie					
2 in	36, 50, 60, 80, 100, 120, 180	30,000 RPM	Type 3	J0701	25
3 in	36, 50, 60, 80, 100, 120, 180	20,000 RPM	Type 3	J0704	25
3M 361F					
1 in	36, 50, 80, 100, 120	30,000 RPM	Type 3	J0685	50
1 ½ in	36, 60, 80, 100, 120	30,000 RPM	Type 3	J0686	50
2 in	24, 36, 50, 60, 80, 100,	25.000 RPM	Type 3	J0690	50
	120, 150, 180, 240	-,			
	4, 36, 50, 60, 100, 120, 150, 240	20,000 RPM	Type 3	J0694	50
TR Roll-On/O					
Approved Ve					
1 ½ in —	60	30,000 RPM	Type 3	447T20	1
	180	30,000 RPM	Type 3	447T21	1
2 in	80	30,000 RPM	Type 3	435Z13	1
	220	30,000 RPM	Type 3	435Z15	1
	400	30,000 RPM	Type 3	447T17	1
3 in _	40	20,000 RPM	Type 3	435Z14	1
	80	20,000 RPM	Type 3	435Z16	1
	220	20,000 RPM	Type 3	435Z17	1
	400	20,000 RPM	Type 3	447T18	1
4 in —	60	15,000 RPM	Type 3	447T26	1
	80	15,000 RPM	Type 3	447T25	1
TP System, S	Snap-On/Off				
Merit	100	10.000.0011			
1 in	100	40,000 RPM	Type 1	J0756	100
1 ½ in	240	30,000 RPM	Type 1	J0761	100
2 in	24, 150, 320	30,000 RPM	Type 1	J0769	100
3 in _	180	20,000 RPM	Type 1	1YFV1	50
	240	20,000 RPM	Type 1	1YFV3	50
	320	20,000 RPM	Type 1	1YFV5	50
Thread Size	Shank Dia. Pilot Dia.	Pilot Length	Brand	Item No.	Pkg. Qty.
Quick Chang					
Quick Chang					
#8-32	1/4 in 1/4 in		Merit	464P98	1
1/4 in- 20	1/4 in —		Merit	464P94	1
1/4 in-20	1/4 in 1/4 in		Merit	464P99	1
	r Extension Mandrel				
Bore Polishe					
1/4 in-20	1/4 in 1/4 in	_	Merit	464P95	1

2256