



2VLU1				2VLR8		
No. of Connec.	AC Contact Rating	Terminals	НР	Contact Form	Item No.	
Toggle Switches, 0.50 in dia Mounting Hole						
Momen	tary On/Off					
2	15A @ 277V AC, 20A @ 125V AC	Quick Connect	1 ½ hp	SPST	2LMZ1	
Momentary On/Off/Momentary On						
3	15A @ 277V AC, 20A @ 125V AC	Screw	1 ½ hp	SPDT	2VLT2	

Panel-Mount Switches

■ Bat toggle: 11/16"L on 2VLN2, and 2VLU1; 34"L on all others

Toggle switch stem is 1/2" dia. x 1/2"L

Applications include appliances, equipment, power tools, lighting control, and other switching functions. Toggle switches include mounting nut. Tabs are 1/4" quick-connect. UL Listed.

No. of		AC Contact			Contact	Item	
Connec.		Rating	Terminals	HP	Form	No.	
On/Off		_					
2		/ AC, 6A @ 125V AC	Screw	_	SPST	2VLN2	
2		/ AC, 20A @ 125V AC		2 hp	SPST	2VLN5	
2	15A @ 277\	/ AC, 20A @ 125V AC	Quick Connect	2 hp	SPST	2VLT7	
4		/ AC, 20A @ 125V AC		2 hp	DPST	2VLU1	
6	15A @ 277\	/ AC, 20A @ 125V AC	Screw	2 hp	3PST	2VLT3	
On/Off/O							
3	15A @ 277\	/ AC, 20A @ 125V AC	Screw	2 hp	SPDT	2VLN7	
On/On							
9	15A @ 277\	/ AC, 20A @ 125V AC	Screw	2 hp	3PDT	2VLP6	
		AC Con	tact	Contact		Item	
Desc	ription	Ratir	q	Form	Terminals	No.	
Miniatur	e Push Butto	n Switches, ½" Mou					
	n/Off	3A @ 250V AC, 6		SPST	Screw	2VLN3	
		10A @ 250V AC, 1	6A @ 125V AC	SPST	Screw	2VLP7	
Rotary Switches, ½" Mounting Hole							
	n/0n/0n	13A @ 125V, 6		SP3T	Solder Lug	2VLR8	
Off/On/	On/On/On	13A @ 125V, 6	.5A @ 250V	SP4T	Solder Lug	2VLT6	


TL Series Toggle Switches

Rated 10A up to 277V

■ Temp. range: -85° to 160°F

■ 1/2" dia. hole mounting

Feature thermoset phenolic case and silver cadmium oxide contacts. UL Listed and CSA Certified.

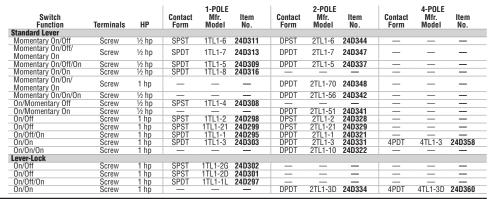





Lighted Rocker **3JC04**



Push Button 3HZ97



Lighted Toggle 3HZ81



Panel-Mount DC Toggle and Rocker Switches



Honeywell

Popular replacement switches for marine applications. 12VDC rated, 5A lamp load, 15A inductive load. Toggle switches fit panels to 3/16" thick with provided backup nut, to 1/4" thick without that nut. Toggle switches require a $\frac{1}{2}$ " mounting hole. Rocker switches require a 11/2" x 7/8" rectangular opening.

Description	Contact Form	Switch Function	Mfr. Model	ltem No.
Rocker	SPST	On/Off	MR11SP	3JC02
Rocker	SPST	Momentary On/Off	MR11MSP	3JC01
Rocker	SPDT	On/Off/On	MR123SP	3JC07
Rocker	SPDT	Momentary On/Off/On	MR123MSP	3JC06
Rocker	SPDT		MR123MMSP	3JC05
Rocker	DPST	On/Off	MR21SP	3JC08
Rocker	DPDT	On/Off/On	MR223SP	3JC11
Rocker	DPDT	Momentary On/Off/Momentary On	MR223MMSP	3JC10
Lighted Rocker (Red)	SPST	On/Off	MR11LRSP	3HZ99
Lighted Rocker (Red)	SPDT	On/Off/On	MR123LRSP	3JC04
Toggle	SPST	Momentary On/Off	M11MSP	3HZ85
Toggle	SPDT	On/Off/On	M123SP	3HZ92
Toggle	SPDT	Momentary On/Off/On	M123MSP	3HZ91
Toggle	SPDT	Momentary On/Off/Momentary On	M123MMSP	3HZ90
Toggle	DPST	On/Off	M21SP	3HZ93
Toggle	DPDT	On/Off/On	M223SP	3HZ96
Toggle	DPDT	On/Off/On	M223JSP	3HZ94
Toggle	DPDT	Momentary On/Off/Momentary On	M223MMSP	3HZ95
Lighted Toggle (Green)	SPST	On/Off	M11LRGSP	3HZ81
Lighted Toggle (Red)	SPST	On/Off	M11LRSP	3HZ82
Lighted-Tip Toggle (Red)	SPST	On/Off	M11LTR	3HZ83
Push Button	SPST	Off/Momentary On	MH11	3HZ97
	Mfr.	Item		
	Model	No.		
Black Silicone Rubber Boo	ot Bonded to	Brass Nut, Fits Any Nonlighted Toggle Switch	MSB1	3JC12
Black Push Button (Horn)	MHB11	3HZ98		