



Enclosed Air or Water Spring-Return Hose Reels

Compact and durable reels are for use in limited spaces. **Enclosed lightweight air or water reels** are designed for continuous use. Polypropylene case houses the brass swivel and fluid path, the steel main shaft, and the steel spring. Case resists most acids, alkalis, and UV rays, and protects and keeps the hose clean. Lightweight reels mount on a wall, ceiling, or the floor. Commonly used with pneumatic tools and for water service. **Enclosed controlled-retraction air or water reel** reduce retraction speed to a safe, steady pace to prevent injuries and hose whipping. 90° full-flow NPT swivel inlet is machined from solid brass with nitrile swivel seals.

Powder-coated, heavy-gauge steel enclosed casing shields out any contaminants and protects and extends the life of the reel, the hose, and the components inside. Reel mounts to the floor, wall, ceiling, or on a bench, and include adjustable guide arms and adjustable hose roller guides. Used with air or water hoses in grocery stores, restaurants, and commercial kitchens. **Enclosed air or water reels** have a full-flow shaft and swivel to assure product delivery. Reels mount to the floor, wall, or on the ceiling and include an adjustable guide arm. Used with air or water hoses in food and chemical plants, automotive service centers, and with pneumatic tools.




Hose Cap.	Hose End Configuration	Max. Operating Pressure	Overall Dim.	Swivel Material	Reel Color	Brand	Item No.
Enclosed Lightweight Air or Water Spring-Return Hose Reels							
Hose Included							
20 ft (¾ in I.D.)	¼ in MNPT	200 psi	8 ¾ in L x 2 ¾ in W x 7 ¾ in H	Brass	Green	Speedaire	2CUD6
50 ft (¾ in I.D.)	¾ in MNPT	232 psi	22 in L x 9 ½ in W x 19 ¾ in H	Brass	Black	Reelcraft	263D78
Enclosed Controlled-Retraction Air or Water Spring-Return Hose Reel							
Hose Included							
50 ft (½ in I.D.)	½ in MNPT	300 psi	21 ⅞ in L x 8 ½ in W x 21 ¾ in H	Brass	Blue	Coxreels	29PY57
Enclosed Air or Water Spring-Return Hose Reels							
Hose Included							
25 ft (¾ in I.D.)	¼ in MNPT	300 psi	16 ¼ in L x 7 in W x 15 in H	Brass	Red	Reelcraft	4NB11
40 ft (½ in I.D.)	½ in MNPT	300 psi	17 11/16 in L x 8 11/16 in W x 17 ½ in H	Aluminum	Green	Speedaire	2CUC9
50 ft (¾ in I.D.)	¾ in MNPT	300 psi	17 11/16 in L x 8 11/16 in W x 17 ½ in H	Aluminum	Green	Speedaire	2CUC7
50 ft (½ in I.D.)	¾ in MNPT	300 psi	21 ½ in L x 7 ¾ in W x 20 ¾ in H	Nickel Plated Steel	Red	Reelcraft	4NB13
Hose Not Included							
50 ft (½ in I.D.)	—	300 psi	21 ⅞ in L x 8 ½ in W x 21 ¾ in H	Brass	Blue	Coxreels	29PY09



Dual-Arm Air or Water Spring-Return Hose Reels

- Mount on a wall, ceiling, or in a truck
- Include a field adjustable guide arm

Feature an all-steel, reinforced dual-pedestal base and arms for increased stability. Reels are powder-coated for corrosion resistance. Hold air or water hoses and are commonly used in manufacturing facilities, auto or fleet service centers, and with food and chemical processing.

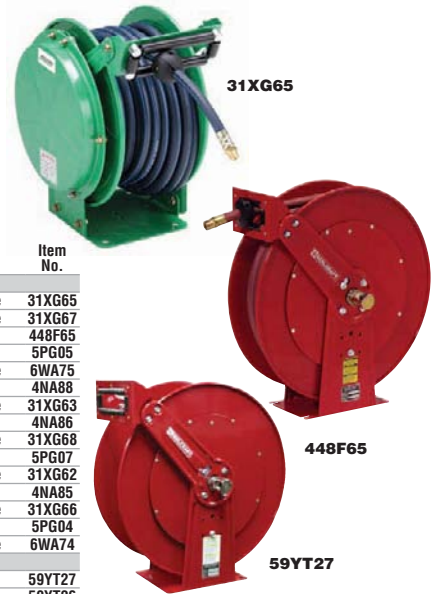

Hose Cap.	Hose End Configuration	Max. Operating Pressure	Overall Dim.	Swivel Material	Reel Color	Brand	Item No.
Hose Included							
50 ft (¾ in I.D.)	¾ in MNPT	300 psi	14 in L x 11 ¼ in W x 15 ¾ in H	Steel	Green	Speedaire	31XG65
50 ft (¾ in I.D.)	¾ in MNPT	300 psi	19 ¾ in L x 16 ½ in W x 20 ¾ in H	Brass	Green	Speedaire	31XG67
50 ft (¾ in I.D.)	¾ in MNPT	250 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	448F65
50 ft (¾ in I.D.)	¾ in MNPT	250 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	5PG05
50 ft (¾ in I.D.)	¾ in MNPT	250 psi	26 ¾ in L x 12 in W x 27 in H	Brass	Green	Speedaire	6WA75
50 ft (1 in I.D.)	¾ in MNPT	250 psi	24 in L x 15 ¾ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	4NA88
75 ft (¾ in I.D.)	½ in MNPT	300 psi	20 ¾ in L x 12 ½ in W x 21 ¾ in H	Brass	Green	Speedaire	31XG63
75 ft (½ in I.D.)	½ in MNPT	300 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	4NA86
75 ft (¾ in I.D.)	¾ in MNPT	300 psi	22 ⅞ in L x 16 ½ in W x 23 ¾ in H	Steel	Green	Speedaire	31XG68
75 ft (¾ in I.D.)	¾ in MNPT	250 psi	24 in L x 13 in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	5PG07
100 ft (¾ in I.D.)	¾ in MNPT	300 psi	20 ¾ in L x 12 ½ in W x 16 ½ in H	Brass	Green	Speedaire	31XG62
100 ft (¾ in I.D.)	¾ in MNPT	300 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	4NA85
100 ft (½ in I.D.)	½ in MNPT	300 psi	20 ¾ in L x 12 ½ in W x 21 ¾ in H	Steel	Green	Speedaire	31XG66
100 ft (½ in I.D.)	½ in MNPT	300 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	5PG04
100 ft (½ in I.D.)	½ in MNPT x ¾ in MNPT	300 psi	26 ¾ in L x 12 in W x 27 in H	Brass	Green	Speedaire	6WA74
Hose Not Included							
50 ft (¾ in I.D.)	—	500 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	59YT27
100 ft (½ in I.D.)	—	500 psi	24 in L x 10 ½ in W x 25 ¾ in H	Nickel Plated Steel	Red	Reelcraft	59YT26



Side-Mount Air or Water Spring-Return Hose Reels

- Hose Included
- Max. operating pressure: 300 psi
- Brass swivel
- Red reel color

Side-mount reels mount with their right or left side against a column, a wall, or wherever space is limited. The guide arm on these low-pressure reels adjusts to right hand (top wind) or left hand (bottom mount). Steel bases are robotically welded for maximum strength, all steel components are powder-coated for corrosion resistance, and full-flow shafts and swivels deliver air or water. Compact reels with air or water hoses are used with pneumatic tools, in automotive service centers, and for paint spraying.



Hose Cap.	Hose End Configuration	Overall Dim.	Item No.
50 ft (¾ in I.D.)	¼ in MNPT	16 ½ in L x 5 13/16 in W x 17 ¾ in H	12U320