


1-800-GRAINGER (472-4643)

# Acoustical Ceiling Tiles

■ White color

A variety of edge types and surface textures to help you create the look you want. All tiles are durable, sag resistant, and have a Flame Spread Index 25 or less. Smoke Developed Index 50 or less. Include a 30-yr. limited system warranty against visible sag, mold/mildew, and bacterial growth (excludes Fissured, Cortega, and Designer products). Mineral fiber construction, except 32WN11 is ceramic, mineral fiber and 6EJL6 and 5UTN3 are fiberglass. All tiles have Class A Fire resistance, according to ASTM E84 and CAN/ULC S102 surface burning characteristics.

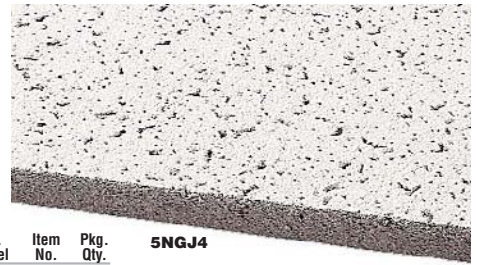

L	W	Thick.	Edge Type	Coverage	Noise Reduction Coefficient	Resistant To	Recycled Content	Mfr. Model	Item No.	Pkg. Qty.
<b>Fine Fissured</b>										
12 in	12 in	3/4 in	Concealed	40 sq ft	0.55	Bacteria, Mildew, Mold, Sag	56%	746	36N476	40
		3/4 in	Angled Tegular	48 sq ft	0.7	Bacteria, Mildew, Mold, Sag, Scratch-Resistant	55%	1820A	13Z992	12
24 in		3/4 in	Angled Tegular	64 sq ft	0.55	Bacteria, Mildew, Mold, Sag	55%	1732	6YLP9	16
		3/4 in	Beveled Tegular	64 sq ft	0.55	Bacteria, Mildew, Mold, Sag	55%	1734	6YLR4	16
	24 in	3/4 in	Square Lay-In	64 sq ft	0.55	Bacteria, Mildew, Mold, Sag	43%	1728A	5NGK0	16
		3/4 in	Square Lay-In	64 sq ft	0.55	Bacteria, Fire Guard, Mildew, Mold, Sag, Scratch-Resistant	55%	1830	13Z993	8
48 in		3/4 in	Square Lay-In	64 sq ft	0.7	Bacteria, Mildew, Mold, Sag	55%	1811	31LC02	8
		3/4 in	Square Lay-In	96 sq ft	0.55	Bacteria, Mildew, Mold, Sag	43%	1729A	5NGJ3	12
<b>Fine Fissured Second Look</b>										
48 in	24 in	3/4 in	Angled Tegular	80 sq ft	0.55	Class A Fire Retardant	32%	1761C	22XJ42	10
<b>Fissured</b>										
24 in		3/4 in	Angled Tegular	64 sq ft	0.55	Class A Fire Retardant	34%	705A	5NGK3	16
		3/4 in	Square Lay-In	64 sq ft	0.55	Class A Fire Retardant	34%	756A	5NGJ7	16
	24 in	3/4 in	Square Lay-In	64 sq ft	0.55	Fire Guard	41%	896	19H050	16
		3/4 in	Square Lay-In	48 sq ft	0.55	Fire Guard	41%	895A	34CY63	8
48 in		3/4 in	Square Lay-In	96 sq ft	0.55	Class A Fire Retardant	34%	755B	5NGJ2	12
<b>Dune and Dune Second Look</b>										
24 in		3/4 in	Angled Tegular	64 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant, Soil	43%	1774	6YLP7	16
		3/4 in	Beveled Tegular	64 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant, Soil	36%	1775	6YLP8	16
	24 in	3/4 in	Square Lay-In	64 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant	43%	1772	13Z990	16
		3/4 in	Angled Tegular	64 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant	38%	1776A	34CY63	8
48 in		3/4 in	Angled Tegular	80 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant	51%	2712A	36N474	10
		3/4 in	Square Lay-In	64 sq ft	0.5	Bacteria, Mildew, Mold, Sag, Scratch-Resistant	38%	1773A	34CY62	8
<b>Cirrus</b>										
24 in	24 in	3/4 in	Angled Tegular	48 sq ft	0.7	Bacteria, Mildew, Mold, Sag	63%	5848N	5UTN5	12
		3/4 in	Beveled Tegular	48 sq ft	0.7	Bacteria, Mildew, Mold, Sag	63%	5898N	5NGK4	12
		3/4 in	Square Lay-In	48 sq ft	0.7	Bacteria, Mildew, Mold, Sag	63%	574B	6YLR6	12
<b>Cirrus Second Look</b>										
48 in	24 in	3/4 in	Beveled Tegular	48 sq ft	0.65	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	62%	513A	32WM80	6
<b>Cirrus Profiles - Classic Step</b>										
24 in	24 in	3/4 in	Beveled Tegular	48 sq ft	0.65	Impact Resistant, Mold/Mildew, Sag, Scratch-Resistant, Soil	62%	591B	22XJ44	12
<b>Ultima</b>										
24 in		3/4 in	Beveled Tegular	48 sq ft	0.8	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	77%	1911A	5NGK1	12
		3/4 in	Beveled Tegular	48 sq ft	0.8	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	77%	1912A	5UTN6	12
	24 in	3/4 in	Beveled Tegular	48 sq ft	0.8	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Scrub, Soil, Wash	76%	1936A	42EM55	12
		3/4 in	Square Lay-In	48 sq ft	0.75	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	77%	1910A	13Z995	12
		3/4 in	Square Lay-In	48 sq ft	0.75	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	77%	1935A	48WC07	12
48 in		3/4 in	Square Lay-In	48 sq ft	0.75	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	77%	1913A	13Z996	6
<b>Georgian High Washability</b>										
48 in	24 in	3/4 in	Square Lay-In	96 sq ft	—	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	36%	793	5NGJ6	12
<b>Georgian</b>										
24 in		3/4 in	Square Lay-In	64 sq ft	0.55	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	36%	764C	6YLR2	16
	24 in	3/4 in	Square Lay-In	96 sq ft	0.55	Bacteria, Impact Resistant, Mildew, Mold, Sag, Scratch-Resistant, Soil	36%	763D	6EJL5	12
<b>Ceramaguard</b>										
48 in	24 in	3/4 in	Square Lay-In	48 sq ft	—	Bacteria, Mildew, Mold, Sag	37%	605C	13Z998	6
		3/4 in	Square Lay-In	48 sq ft	0.55	Bacteria, Mildew, Mold, Sag, Soil	37%	608A	32WN11	6
<b>Clean Room VL (Unperforated) - Fire Guard</b>										
24 in	24 in	3/4 in	Square Lay-In	48 sq ft	0.55	Bacteria, Fire Guard, Mildew, Mold, Sag, Soil	41%	868B	5NGK2	12
48 in		3/4 in	Square Lay-In	64 sq ft	0.55	Bacteria, Fire Guard, Mildew, Mold, Sag, Soil	41%	870B	5UTN4	8
<b>Clean Room FL</b>										
24 in	24 in	3/4 in	Square Lay-In	48 sq ft	0.55	Bacteria, Mildew, Mold, Sag, Soil	77%	1715B	6YLR5	12
48 in		3/4 in	Square Lay-In	64 sq ft	0.55	Bacteria, Mildew, Mold, Sag, Scratch-Resistant, Soil	39%	1721B	36N475	8
<b>Cortega Fire Guard</b>										
24 in	24 in	3/4 in	Angled Tegular	48 sq ft	0.55	Fire Guard	41%	816A	36N477	12
		3/4 in	Square Lay-In	64 sq ft	0.55	Fire Guard	41%	824	6YLR3	16
48 in		3/4 in	Square Lay-In	48 sq ft	0.5	Fire Guard	41%	823A	34CY60	6
<b>Cortega &amp; Cortega Second Look</b>										
24 in		3/4 in	Angled Tegular	64 sq ft	0.55	Class A Fire Retardant	25%	704A	5NGJ8	16
		3/4 in	Beveled Tegular	64 sq ft	0.55	Class A Fire Retardant	41%	2195	13Z997	16
		3/4 in	Square Lay-In	64 sq ft	0.55	Class A Fire Retardant	36%	770	5NGJ4	16
	24 in	3/4 in	Angled Tegular	80 sq ft	0.55	Class A Fire Retardant	34%	2767D	5NGJ9	10
		3/4 in	Angled Tegular	80 sq ft	0.55	Class A Fire Retardant	34%	703B	6YLR1	10
48 in		3/4 in	Angled Tegular	80 sq ft	0.55	Class A Fire Retardant	34%	2776B	32WM10	10
		3/4 in	Angled Tegular	80 sq ft	0.55	Class A Fire Retardant	34%	2765D	13A867	10
		3/4 in	Square Lay-In	96 sq ft	0.55	Class A Fire Retardant	34%	769A	5NGJ1	12
<b>Shasta</b>										
48 in	24 in	3/4 in	Square Lay-In	128 sq ft	0.7	Bacteria, Mildew, Mold, Sag	82%	2906	6EJL6	16
<b>Random Fissured</b>										
48 in	24 in	3/4 in	Square Lay-In	128 sq ft	0.55	Bacteria, Mildew, Mold, Sag	71%	2911A	5UTN3	16
<b>Kitchen Zone</b>										
24 in		3/4 in	Square Lay-In	64 sq ft	—	Bacteria, Mildew, Mold, Sag, Scratch-Resistant, Soil	51%	673	20CA77	16
48 in	24 in	3/4 in	Square Lay-In	96 sq ft	—	Bacteria, Mildew, Mold, Sag, Scratch-Resistant, Soil	51%	672	20CA76	12

**5NGJ4**  
**Fine Fissured**—Provide excellent sag resistance.

**Fine Fissured Second Look**—Feature an innovative look where the panel is scored to look like a 2 ft. x 2 ft. panel. Compatible with standard suspension systems.

**Fissured**—Economic panels come with a directional, fissured visual offers standard acoustics.

**Dune and Dune Second Look**—Nondirectional appearance helps reduce installation time. Durable, scratch-resistant surface.

**Cirrus**—Offer a medium-textured appearance with excellent noise reduction, sag resistance, high light reflectance, antimicrobial treatment, and no added formaldehyde.

**Cirrus Profiles - Classic Step**—Medium-textured appearance with edge details carved into the panels. Compatible with standard suspension systems.

**Ultima**—Offer excellent noise reduction, sag resistance, high light reflectance, antimicrobial treatment, and no added formaldehyde, in a high-impact, scratch-resistant, washable, and scrubbable tile.

**Georgian High Washability and Clean Room VL**—Unperforated Class 5 (Class 100) tiles offer high wash and scrubability, and soil resistance. Impact and scratch resistant. Meet USDA/FSIS guidelines for food processing areas.

**Ceramaguard**—Nondirectional, smooth texture and resistant to chemical fumes. For high-moisture locations including shower areas and indoor parking garages.

**Clean Room FL**—Unperforated Class 5 (Class 100) tiles feature high scrubability and washability plus impact, scratch, and soil resistance. Meet USDA/FSIS guidelines in food processing areas.

**Kitchen Zone**—Easy-to-clean panels feature up to 20% more light reflectance than vinyl-covered gypsum. The smooth surface meets USDA/FSIS guidelines in food processing areas.

**Suspension Systems**—SuperLock clips allow fast and secure connections with accurate alignment. Rotary stitching adds strength. PeakForm profile increases strength and grid stability. Meet seismic requirements when installed according to ICC ESR-1308.

Type	Load Carrying (lb. per Linear ft.)	L	W	H	Mfr. Model	Item No.
<b>Suspension Systems</b>						
Prelude Wall Molding, 144 in L	—	144 in	3/4 in	3/4 in	7800RWH	5NHE4
Prelude Cross Tee, 24 in L	40.45 lb	24 in	1 3/8 in	1 3/8 in	XL7328RW	5NHE3
Prelude Cross Tee, 48 in L	9 lb	48 in	1 3/8 in	1 1/2 in	XL7342	6EJL8
Prelude Cross Tee, 48 in L	8.31 lb	48 in	1 3/8 in	1 3/8 in	XL7348RW	5NHE2
Prelude Main Beam, 144 in L	12.8 lb	144 in	1 3/8 in	1 1/8 in	7300XRWH	5NHE1

Description	Item No.
<b>SuperCoat Touch-Up Paint</b>	
Ceiling Tile Touch-Up Paint, Brush in Cap, 8 oz., White	5NTW4