

Disconnect
Switch
4B983

Flange-Mounted Disconnect Switches

Complete kit requires a disconnect switch, handle, and door-closing mechanism.

NONFUSIBLE AND FUSIBLE MECHANISMS

- Include disconnect switch and operating mechanism; handle sold separately

UL 98 Listed and suitable as the main disconnect switch for a control panel. Ship assembled for right-hand operation, but can be easily converted to left-hand with no additional parts.

DOOR-CLOSING MECHANISMS

- Operating mechanism only; disconnect switch and handle sold separately
- Primarily for flange-mounted disconnect switches and circuit breaker operating mechanisms, but can be used independently. For small- and medium-size single-door control enclosures.


30 AA		60 AA		100 AA		200 AA	
Mfr. Model	Item No.	Mfr. Model	Item No.	Mfr. Model	Item No.	Mfr. Model	Item No.
Nonfusible Mechanisms							
9422TCN30	3KK34	9422TDN60	2ETH7	9422TEN10	2ETH8	9422TF1	4B983
Fusible Mechanisms (Class H, K, J, R Fuses)							
9422TCF30	2VRN5	9422TDF63	3KK37	9422TEF10	3KK38	9422TF2	4B982
Description						Mfr. Model	Item No.
6" Handles For Use With All NEMA Enclosures							
For Use With NEMA Steel Enclosures						9422A1	4B989
For Use With NEMA SS Enclosures						9422A2	4B988
Door Closing Mechanisms Hinged Left							
For Use With NEMA 4, 12						9423M4	4B980
For Use With 6 in Door Latch Handle						9423M9	4B979
Optional 3 Point Locking for Nos. 4B980 and 4B979 Door Latches						9423M3	4B981

PANDUIT®

Adhesive-Lined Grommet Edging

- Sold in 100-ft. lengths

Pressure-sensitive adhesive secures edging in place to protect wires and cables against chafing. Slotted-wall items are for irregularly shaped and round panel holes. Solid-wall items are for straight edges. Natural color.



1LLJ8

		SLOTTED		SOLID	
Min. Panel Thickness	Max. Panel Thickness	Mfr. Model	Item No.	Mfr. Model	Item No.
0.04 in	0.062"	GEE62F-A-C	1LLJ8	GES62F-A-C	1LLJ9
0.06 in	0.099"	GEE99F-A-C	1LLK1	GES99F-A-C	1LLK2

N Series NEMA 4X Nonmetallic Control Enclosures

- Fiberglass
- NEMA 4X, 12
- Stainless steel hinge
- Latch down cover

Designed to accommodate electrical, electronic, instrumentation, and mechanical controls indoors and outdoors to provide protection against windblown dust and rain, splashing and hose directed water.


Nominal Enclosure Height	Nominal Enclosure Width	Nominal Enclosure Depth	Interior Panel	OPAQUE COVER Item No.	CLEAR COVER Item No.
20 in	16 in	8 in	52XD93 or 52XD94	52XC75	—
20 in	16 in	10 in	52XD93 or 52XD94	52XC76	52XC77
24 in	20 in	8 in	52XD95 or 52XD96	52XC78	52XC79
30 in	20 in	8 in	52XD97 or 52XD98	52XC80	—
30 in	20 in	10 in	52XD97 or 52XD98	52XC81	52XC82
36 in	30 in	10 in	52XD99 or 52XE01	52XC83	—
36 in	30 in	12 in	52XD99 or 52XE01	52XC84	52XC85
48 in	36 in	12 in	52XE02 or 52XE03	52XC86	52XC87



Door-Mount, Nonfusible Load Break Switches

- 3-pole

For applications where motor branch circuit protection is provided upstream of the switch. UL 508 nonfusible load break switches; UL 508 Listed as manual motor controllers. Complete with mounting handle operator, 13" shaft, door interlock plate, and line terminal shroud.

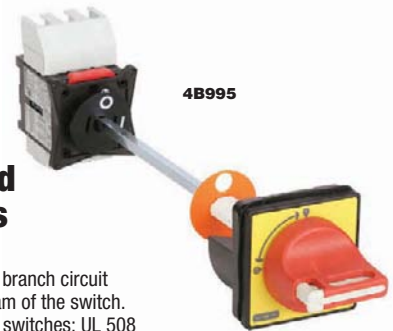

4B995

Amps AC	HP @ 240V	HP @ 480V	HP @ 600V	Mfr. Model	Item No.
Mechanisms					
20 A	5 hp	10 hp	10 hp	VCCF1	4B996
25 A	5 hp	10 hp	15 hp	VCCF2	4B995
45 A	15 ½ hp	30 hp	40 hp	VCCF3	4B994
Description		For Use With		Mfr. Model	Item No.
Add-On Contact Modules					
Main Pole		Tesys Vario Series		VZ1	4B993
Main Pole		Tesys Vario Series		VZ2	4B992
Auxiliary Contact, 1NO/1NC		Tesys Vario Series		VZ7	4B990



Hoffman

Oiltight Hole Seals

Provide a seal for unused push-button or conduit holes. Carbon steel have a gray powder-coat finish. Rated NEMA 12.

6UUJ9



Conduit Size	Hole Dia.	Item No.	Conduit Size	Hole Dia.	Item No.
Steel					
Hoffman					
0.5 in	0.87 in	32FF56	1.25 in	1.68 in	6UUK4
0.75 in	1.06 in	32FF58	1.5 in	2 in	6UUK5
0.87 in	0.87 in	32FF73	2 in	2.5 in	6UUK6
1 in	1.37 in	32FF60	2.5 in	3 in	6UUK7
1.18 in	1.25 in	32FF72	3 in	3.62 in	6UUK8
1.25 in	1.68 in	32FF62	3.5 in	4.12 in	6UUK9
1.5 in	2 in	32FF64	4 in	4.62 in	6UUL0
2 in	2.5 in	32FF66	Stainless Steel		
2.5 in	3 in	32FF68	Hoffman		
3 in	3.62 in	32FF69	0.5 in	0.87 in	32FF57
3.5 in	4.12 in	32FF70	0.75 in	1.06 in	32FF59
4 in	4.62 in	32FF71	0.87 in	0.87 in	32FF74
Rittal					
0.5 in	0.87 in	6UUK0	1 in	1.37 in	32FF61
0.75 in	1.06 in	6UUK1	1.18 in	1.25 in	32FF75
0.87 in	0.87 in	6UUK9	1.25 in	1.68 in	32FF63
1 in	1.37 in	6UUK3	1.5 in	2 in	32FF65
1.18 in	1.25 in	6UUK2	2 in	2.5 in	32FF67
Carbon Steel					
Rittal					
		Condensate Drain		6UUL1	

STAHLIN
www.stahlin.com

52XC75



52XC77