
ELECTRICAL Cable Protection

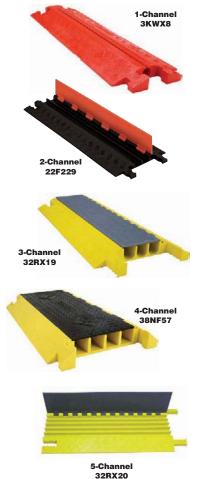

Lay-In Cable Ramps

Polyurethane material

Ramps have one or more channels to hold cable and hose, keeping them off the floor and protecting them from wear and tear. They have an interlocking design which allows for reconfigurations, repairs, or replacements without moving cable or hose.

Connection Style	Max. Cable Dia.	Length	w	н	Load Capacity	Color	Brand	ltem No.
-Channel Spl	it-Top Cable Ra	amps						
Dog Bone	3⁄4 in	38 ½ in	11 in	1 ¼ in	26,000 lb/Axle	Black/Orange	Checkers	22F231
T Shaped	1 ¼ in	38 1/4 in	11 ½ in	1 5⁄8 in	17.000 lb/Axle	Yellow	Linebacker	39AM93
	1 ¼ in	38 ¼ in	11 ½ in	1 5% in	17.000 lb/Axle	Orange	Linebacker	3KWX8
	2 1/4 in	38 ½ in	14 ¼ in	3 in	23,400 lb/Axle	Yellow	Linebacker	39AM94
	2 1/4 in	38 ½ in	14 1/4 in	3 in	23,400 lb/Axle	Orange	Linebacker	5MKH4
-Channel Hin	ged-Cover Cab					e g e		-
Dog Bone	3/4 in	38 ½ in	12 in	1 ¼ in	26,000 lb/Axle	Black/Orange	Checkers	22F229
T Shaped	3 1/4 in	38 ½ in	21 ³ ⁄ ₄ in	4 ¼ in	21,760 lb/Axle		Checkers	32RX24
	ged-Cover Cab		21 / 111		21,100 10,7000	orange, renem	0110011010	02110121
- onamer min	3/4 in	38 ¾ in	13 ¾ in	1 ¼ in	34,000 lb/Axle	Black/Orange	Checkers	22F227
	2 1/8 in	18 % in	18 % ft	2 % in	28.420 lb/Axle	Yellow	Yellow Jacket	22F221
'	2 1/8 in	23 ½ in	18 ¾ in	2 % in	28,420 lb/Axle		Yellow Jacket	22F222
Dog Bone	2 ½ in	23 ½ in	18 ¾ in	2 % in	28,420 lb/Axle		Yellow Jacket	22F223
	2 1/8 in	36 in	18 ½ in	2 % in	28,420 lb/Axle		Yellow Jacket	22F220
	2 1/4 in	38 % in	20 in	3 in	28,420 lb/Axle		Checkers	5MKK3
Gripper	2 1/4 in	36 in	18 ¼ in	2 3/4 in	10,000 lb/Axle		Power First	32RX19
anppoi	2 1/4 in	19 3/4 in	14 ½ in	3 in	28,420 lb/Axle	Orange	Checkers	32RX26
T Shaped	2 1/4 in	24 ³ ⁄ ₄ in	23 ¹ / ₄ in	3 in	28,420 lb/Axle		Checkers	32RX27
	2 1/4 in	24 3/4 in	23 1/4 in	3 in	28,420 lb/Axle		Checkers	32RX28
	2 1/4 in	38 % in	19 3/4 in	3 in	28,420 lb/Axle		Checkers	32RX25
Channal Hin	ged-Cover Cab		19 74 111	3 111	20,420 ID/AXIE	Orange/ renow	GHECKEIS	JZNAZJ
	3 in	24 in	8 ¾ in	4 in	12,000 lb/Axle	Yellow	Bumble Bee	38NF58
	3 in	24 in	24 in	4 in	12,000 lb/Axle		Bumble Bee	38NF59
Dog Bone	3 in	24 in	24 in	4 in	12,000 lb/Axle		Bumble Bee	38NF60
	3 in	24 in 36 in	24 in	4 in	20.200 lb/Axle		Bumble Bee	38NF57
Channal Ilin	ged-Cover Cab		24 111	4 111	20,200 ID/AXIE	DIACK/ YEIIOW	DUITIDIE DEE	3011-37
-unannei hin	3/4 in	38 % in	16 % in	1 ¼ in	48.000 lb/Axle	Plack/Orange	Checkers	22F225
	1 13/40 in	19 3/4 in	8 3/4 in	1 % in	21.000 lb/Axle		Checkers	5MKJ9
	1 13/40 III 1 in	24 in	19 3/4 in	1 % in	32,600 lb/Axle		Yellow Jacket	22F218
-				1 % in				
	1 in 1 13/40 in	24 in 24 ½ in	19 ¾ in 21 % in	2 in	32,600 lb/Axle		Yellow Jacket Checkers	22F219 5MKK0
Dog Bone		24 1/2 In 24 in	21 % in 21 ¾ in	2 In 2 ½ in	21,000 lb/Axle			
-	1 13/40 in			2 ½ In 1 % in	21,000 lb/Axle		Checkers	5MKK1
	1 13/40 in	28 ½ in	28 1/4 in		21,000 lb/Axle		Checkers Vallaw lasket	5MKK2
	1 in	36 in	19 ¾ in	1 % in	32,600 lb/Axle		Yellow Jacket	22F216
0-1	1 13/40 in	39 ½ in	19 ½ in	2 1/8 in	21,000 lb/Axle		Checkers	5MKJ8
Gripper	1 1/4 in	36 in	16 ½ in	1 5% in	10,000 lb/Axle		Power First	32RX20
T Shaped	1 3/8 in	20 in	19 % in	2 1/4 in	40,300 lb/Axle	Orange	Checkers	32RX30
	1 3% in	24 in	22 ¾ in	2 ¾ in	40,300 lb/Axle		Checkers	32RX31
	1 3% in	24 in	22 ¾ in	2 ¾ in	40,300 lb/Axle		Checkers	32RX32
	1 ¾ in	38 ¾ in	19 ¾ in	2 ¼ in	40,300 lb/Axle	Orange/Yellow	Checkers	32RX29
			over Cable Ram					
Dog Bone	1 ½ in	36 in	14 1/8 in	2 1⁄4 in	21.000 lb/Axle	Orange	Checkers	5MKK4

ADA Accessibility Cable Ramps



ADA accessibility ramps cover cable and hose while complying with ADA requirements. They provide a

more gradual slope than other cable ramps and are slip-resistant to ensure smooth crossover for wheelchairs and pedestrians with disabilities.

CHECKERS

			-				
Channel Height	Length	w	Н	Load Capacity	Color	Brand	ltem No.
ps with Hinged Cover							
3⁄4 in	39 ¾ in	28 1/2 in	1 1⁄4 in	46,000 lb/Axle	Black/Orange	Checkers	22F230
3⁄4 in	39 ¾ in	28 1/2 in	1 1⁄4 in	46,000 lb/Axle	Black/Orange	Checkers	22F228
				· · · · · ·			
3⁄4 in	39 ¾ in	30 ¾ in	1 ¼ in	54,000 lb/Axle	Black/Orange	Checkers	22F226
				· · · · ·			
3⁄4 in	39 1/8 in	33 ¾ in	1 1⁄4 in	68,000 lb/Axle	Black/Orange	Checkers	22F224
1 ¾ in	20 in	50 in	1 1 % in	21,000 lb/Axle	Black/Orange	Checkers	32RX15
1 ¾ in	20 in	50 in	1 1 % in	21,000 lb/Axle	Black	Checkers	32RX16
1 % in	20 in	50 in	1 % in	21,000 lb/Axle	Blue/Orange	Checkers	32RX17
r Cable Ramps					Ŭ		
•							
1 1/4 in	47 1/2 in	3 in	2 in	40,300 lb/Axle	Yellow	_	3KWU7
1 1/4 in	38 ½ in	21 ¾ in	2 1/4 in	40,300 lb/Axle	Blue	_	3KWU5
1 ¼ in	38 5% in	35 in	3 1/4 in	40.300 lb/Axle	Blue	Checkers	32RX33
	Height ps with Hinged Cover 34 in 34 in 34 in 34 in 34 in 34 in 136 in	Height Length ps with Hinged Cover 39 ¾ in ¾ in 20 ⅓ in ¾ in 20 in 1 ⅛ in 20 in 1 ⅛ in 20 in 1 ⅛ in 20 in r Cable Ramps 1 ¼ in 47 ½ in 1 ¼ in 38 ½ in	Height Length W ps with Hinged Cover 39 ¾ in 28 ½ in ¾ in 39 ¾ in 30 ¾ in ¾ in 39 ¾ in 30 ¾ in ¾ in 39 ¾ in 30 ¾ in ¾ in 20 in 50 in 1 ¼ in 47 ½ in 3 in 1 ¼ in 38 ½ in 21 ¾ in	Height Length W H ps with Hinged Cover 4 1 4 <td< td=""><td>Height Length W H Capacity ps with Hinged Cover 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 54,000 lb/Axle ¾ in 39 ¾ in 30 ¾ in 1 ¼ in 54,000 lb/Axle ¾ in 39 ¾ in 30 ¾ in 1 ¼ in 68,000 lb/Axle ¾ in 20 in 50 in 1 ¼ in 68,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 47 ½ in 3 in 2 in 40,300 lb/Axle 1 ¼ in 38 ½ in 21 ¾ in 2 ¼ in 40,300 lb/Axle</td><td>Height Length W H Capacity Color 36 with Hinged Cover </td><td>Height pas with Hinged CoverLength MWHCapacity CapacityColorBrand34 in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in30 ¾ in1 ¼ in54,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in30 ¾ in1 ¼ in68,000 lb/AxleBlack/OrangeCheckers¾ in20 in50 in1 ¼ in68,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlue/OrangeCheckers1 ¼ in47 ½ in3 in2 in40,300 lb/AxleYellow—1 ¼ in38 ½ in21 ¾ in2 ¼ in40,300 lb/AxleBlue—</td></td<>	Height Length W H Capacity ps with Hinged Cover 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 46,000 lb/Axle ¾ in 39 ¾ in 28 ½ in 1 ¼ in 54,000 lb/Axle ¾ in 39 ¾ in 30 ¾ in 1 ¼ in 54,000 lb/Axle ¾ in 39 ¾ in 30 ¾ in 1 ¼ in 68,000 lb/Axle ¾ in 20 in 50 in 1 ¼ in 68,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 20 in 50 in 1 ¼ in 21,000 lb/Axle 1 ¼ in 47 ½ in 3 in 2 in 40,300 lb/Axle 1 ¼ in 38 ½ in 21 ¾ in 2 ¼ in 40,300 lb/Axle	Height Length W H Capacity Color 36 with Hinged Cover	Height pas with Hinged CoverLength MWHCapacity CapacityColorBrand34 in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in28 ½ in1 ¼ in46,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in30 ¾ in1 ¼ in54,000 lb/AxleBlack/OrangeCheckers¾ in39 ¾ in30 ¾ in1 ¼ in68,000 lb/AxleBlack/OrangeCheckers¾ in20 in50 in1 ¼ in68,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlack/OrangeCheckers1 ¼ in20 in50 in1 ¼ in21,000 lb/AxleBlue/OrangeCheckers1 ¼ in47 ½ in3 in2 in40,300 lb/AxleYellow—1 ¼ in38 ½ in21 ¾ in2 ¼ in40,300 lb/AxleBlue—



Cable and Hose Bridges

Polyurethane material

32RX17

Cable and hose bridges safeguard against vehicle traffic. They drop over cable and hose lines to protect them against pressure from heavy vehicles and help reduce maintenance and replacement costs.

Connection Style	Max. Cable Dia.	Length	w	н	Load Capacity	Color	ltem No.
1-Channel Ca	adie & Hose	Briages					
Dog Bone	3 ½ in	30 in	18 ¼ in	6 in	8,000 lb/Axle	Yellow	3KUR8
Modular Interlocking	3 in	27 in	17 ½ in	3 1 in	23,700 lb/Axle	Yellow	4UDZ9
	4 ½ in	31 in	15 % in	5 ½ in	19,300 lb/Axle	Yellow	4UEA1
	6 ½ in	63 in	17 ½ in	8 1/8 in	17,100 lb/Axle	Yellow	4UEA2



Find even MORE on Grainger.com®

1-800-GRAINGER (472-4643)



Scan. Order. Done.

CHECKERS LINEBACKER

Details on page A1.