
## ELECTRICAL **Cable Protection**

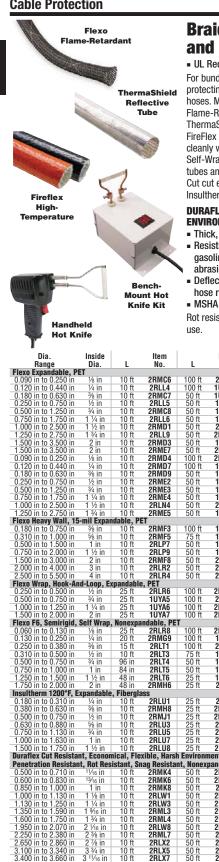

# **Braided Sleeving for Wire** and Cable Management

#### UL Recognized

For bundling, managing, and protecting wires, cables, and hoses. Most are black (Flexo Flame-Retardant has white tracer). ThermaShield are silver and FireFlex are red. Most types cut cleanly with a hot knife. Flexo F6 Self-Wrap, DuraFlex, ThermaShield tubes and wrap, and Flexo Clean-Cut cut easily with scissors or knife. Insultherm cuts with scissors only.

#### DURAFLEX HARSH **ENVIRONMENT**

- Thick, tightly woven nylon
- Resists UV, chemicals, gasoline, salt, snags, cuts, abrasion, and penetration
- Deflects high-pressure hose ruptures
- Rot resistant for continuous outdoor

Item

No.

2RLL3 1UXW6

1UXW8 1UXY1

**111XY3** 

1UXY5 2RLL7

2RMD2 1UXY7 2RME8

2RMD5 2RMD5 1UXY8 1UXY9 1UXZ1

1UXZ2 1UXZ3

2RLN5

111X74

1UYA1

1UYA2 1UYA3

**1UYA4** 

2RLR1 2RLR3

2RLR5

2RMG3

2RMG3 2RLR7 2RMG4 2RMG5

2RMG7 1UYA8 2RLR9

1UYA9 1UYB1 1UYB2

1UYB3 2RLT7

2RLT9 2RMH7 2RMH9

2RLU2 2RLU4

2RLU6 2RMJ3

ent. Hea

2BMK5

2RMK7

2RLV9

2RML1 2RLW4 2RLW5

2RLW5 2RLW7 2RML6 2RLX1 2RLX3

2RLX6 2RLX8

250 ft 250 ft 200 ft 200 ft 200 ft 200 ft

200 ft 500 ft 500 ft 500 ft 250 ft 250 ft 250 ft 200 ft

200 ft

500 ft 250 ft 250 ft 250 ft 200 ft 100 ft 100 ft

400 ft 200 ft 150 ft 150 ft 100 ft 75 ft 50 ft

100 ft 100 ft 100 ft 100 ft 100 ft

100 ft 50 ft

Duty, andable, Nylon

100 ft 100 ft

100

100 100 ft 100 ft

100 ft 100 ft 100 ft 100 ft 100 ft 100 ft

Item

No.

2RLL2

1UXW5 1UXW7 1UXW9

11**1**XY2 1UXY2 1UXY4 2RMC9 2RLL8 2RME9 1UXY6

2RMD6 2RMD6 2RMD8 2RME1 2RLN1

2RLN2 2RLN3

2RLN6

2BMF6

2RMF4

2RMF6 2RLP8

2RMF7

2RMF9 2RMG1

2RMG2

\_ Ξ

2RMG6 2RMG8 2RMH1

2RI T2 2RMH2 2RMH3

2RMH4 2RMH5

2RLT8 1UYB4

1UYB5 1UYB6 1UYB7

1UYB8 2RMJ2

2**BI V**7

2RLV7 2RLV8 2RMK9 2RLW2 2RML2 2RML2

2RML5

2RLW9

2RML8 2RLX4 2RML9 2RLX9

2RMT9 2RMC5

# WELD WRAP

- Coated fiberglass
- Withstands temps. to 1000°F
- Resists abrasion and punctures FED 191/5093
- Protects hoses and wiring from

molten welding splatter and sparks.

### THERMASHIELD REFLECTIVE

 Withstands temps. to 500°F Resists gasoline, engine

chemicals, cuts, and abrasion Aluminized heat shield is bonded to tightly braided, insulating fiberglass. Wrap uses a high-temp. adhesive.

#### **DURAWRAP HARSH** ENVIRONMENT

- Tightly woven ballistic nylon
- Hook-and-loop closure

- Resists UV, abrasion, gasoline, engine chemicals, and salt water
- Deflects high-pressure hose ruptures

Overlarge sleeving can be used over chain as a scuff preventive.

#### **FIREFLEX HIGH-TEMPERATURE**

- Silicone-jacketed fiberglass
- Nonconductive
- Stable to 500°F
- Resists abrasion and punctures

0.08"-thick sleeving bends to follow tight curves. For racing vehicles and similarly demanding industries.

#### **GORILLA SLEEVE**

- Flat-filament nylon
- Resists UV. gasoline, engine chemicals, and salt water

0.046" thick for extreme abrasion and cut resistance.

Dia. Range		Inside Dia.		L	ltem No.
Weld Wrap with Hook-an	d-Loop, 1000°F,	Nonexpandabl	e, Fiberglass		
0.500 in to 1.000	in	1 in 1 ½ in		25 ft	2RMT2
1.000 in to 1.500 1.500 in to 2.000	in	2 in		25 ft 25 ft	2RMT3 2RMT4
2.500 in to 3.000	in	3 in		25 ft	2RMT5
ThermaShield Tubes, Nor	nexpandable, Fi	berglass			
0.250 in to 0.500	in	1/2 in		50 ft 50 ft	2RMP7
0.380 in to 0.630 0.500 in to 0.750	in	5% in 3⁄4 in		50 ft	2RMP8 2RMP9
0.630 in to 0.880		7% in		50 ft	2RMR1
0.750 in to 1.000	in	1 in	5	50 ft	2RMR2
1.000 in to 1.250	in	1 1/4 in		50 ft	2RMR3
1.250 in to 1.500 1.500 in to 1.750		1 ½ in 1 ¾ in		50 ft 25 ft	2RMR4 2RMR5
1.750 in to 2.000	in	2 in		25 ft	2RLZ7
2 250 in to 2 500	in	2 1/2 in	2	25 ft	2RLZ8
Thermachield Wrap, Nonexpandable, Fiberglass, Adhesive Seal 0.130 in to 0.250 in 1/4 in 48 in 2RLZ9					
0.130 in to 0.250 0.250 in to 0.380	in	1/4 in 3% in		18 in 18 in	2RLZ9 2RMR6
0.380 in to 0.500		1/2 in		48 in	2RMR7
0.500 in to 0.750	in	3/4 in		18 in	2RMA1
0.750 in to 1.000		1 in		18 in	2RMR8
1.000 in to 1.250 1.250 in to 1.500	in	1 1/4 in		18 in	2RMA2
1.750 in to 2.000	lll in	1 ½ in 2 in		18 in 18 in	2RMR9 2RMA3
Dia.	Inside	2 111	Item	10 111	Item
Range	Dia.	L	No.	L	No.
DuraWrap Harsh Environment, Heavy Duty, Retro Fit Installation,					
Hook-And-Loop, Nonexpa		10.4	001415	05.4	0.0014
0.750 in to 1.000 in 1.250 in to 1.500 in	1 in 1 ½ in	10 ft 10 ft	2RMJ5 2RMJ7	25 ft 25 ft	2RMJ4 2RMJ6
1.750 in to 2.000 in	2 in	10 ft	2RMJ8	25 ft	2RLU9
1.250 in to 1.500 in 1.750 in to 2.000 in 2.250 in to 2.500 in 2.750 in to 3.000 in 3.250 in to 3.500 in	2 1/2 in	10 ft	2RMJ9	25 ft	2RLV1
2.750 in to 3.000 in	3 in 3 ½ in	10 ft	2RMK1	25 ft	2RLV2
3.750 in to 4.000 in	4 in	10 ft 10 ft	2RMK2 2RMK3	25 ft	2RLV4
4 250 in to 4 500 in	4 1/2 in	10 ft	2BI V6	25 ft	2RLV5
DuraWrap Harsh Environn	nent, Heavy Du	y, Retro Fit Ins	tallation,		
Hook-and-Loop, Nonexpa 3.250 in to 3.500 in	ndable, Nylon			25 ft	2RLV3
Fireflex Extreme Tempera	3 ½ in ature Resistant.	Moisture Resi	stant. Nonexna		
Fireflex Extreme Tempera 0.130 in to 0.250 in	1⁄4 in	60 in	2RLY2		2RLY1
0.250 in to 0.380 in	3/8 in	60 in	2RMN1	50 ft	2RLY3
0.380 in to 0.500 in 0.500 in to 0.630 in	1⁄2 in 5⁄8 in	60 in 60 in	2RMN3 2RMN5	50 ft 50 ft	2RMN2 2RMN4
0.630 in to 0.750 in	3/4 in	60 in	2RLY4	50 ft	2RMN6
0.750 in to 0.880 in	7∕≋ in	60 in	2RMN7	50 ft	2RLY5
0.880 in to 1.000 in 1.000 in to 1.250 in	1 in	60 in	2RLY7	50 ft	2RLY6
1.000 in to 1.250 in	1 ¼ in 1 ½ in	60 in 60 in	2RMN8 2RMN9	50 ft	2RLY8 2RLY9
1.200 in to 1.200 in	1 3/4 in	60 in	2RMP1	50 ft 25 ft	2RLT9 2RLZ1
1.750 in to 2.000 in	2 in 2 ¼ in	60 in	2RLZ2	25 ft	2RMP2
2.000 in to 2.250 in	2 ¼ in	60 in	2RLZ3	25 ft	2RMP3
2.250 in to 2.500 in	2 1/2 in 2 3/4 in	60 in	2RMP5	25 ft	2RMP4
1.200 in to 1.500 in 1.250 in to 1.500 in 1.500 in to 1.750 in 2.000 in to 2.250 in 2.250 in to 2.500 in 2.500 in to 2.500 in 2.500 in to 3.000 in 2.500 in to 3.000 in	2 % In 3 in	60 in 60 in	2RLZ5 2RMP6	25 ft 25 ft	2RLZ4 2RLZ6
Flexo Clean-Cut, Expanda		00111	2111110	2011	211220
0.120 in to 0.250 in	1⁄8 in	100 ft	2RLN7	500 ft	2RLN8
0.150 in to 0.440 in	1/4 in	100 ft	1UXZ5	500 ft	2RMF1
0.180 in to 0.630 in 0.250 in to 0.750 in	3/8 in 1/2 in	50 ft 50 ft	1UXZ6 1UXZ7	500 ft 500 ft	2RLN9 2RLP1
0.630 in to 1.000 in	3/4 in	50 ft	1UXZ8	250 ft	2RLP2
0.750 in to 1.190 in	1 in	50 ft	2RLP3	250 ft	2RLP4
1.000 in to 1.500 in	1 1/4 in	50 ft	1UXZ9	250 ft	2RMF2
1.250 in to 2.000 in Gorilla Sleeve, Expandab	1 1/2 in	50 ft	2RLP5	250 ft	2RLP6
0.380 in to 0.630 in	1/2 in	10 ft	2RMA4	100 ft	2RPD2
0.630 in to 1.000 in	3⁄4 in	10 ft	2RPD3	50 ft	2RMA5
0.750 in to 1.250 in	1 in	10 ft	2RMA6	50 ft	2RPD4
1.000 in to 1.500 in	1 1/4 in	10 ft	2RPD5	50 ft	2RMT1
1.500 in to 2.000 in 1.750 in to 2.250 in	1 ¾ in 2 in	60 in 60 in	2RPD6 2RMA8	25 ft 25 ft	2RMA7 2RPD7
1.7 00 111 10 2.200 111	2 111	00 111	LIIIIAU	2011	2111 07

408 **GRAINGER**®

10 ft 10 ft 10 ft 10 ft 10 ft

10 ft 10 ft

2RML4 2RLW8

2RML7 2RLX2

2RLX5 2RLX7

1 3/4 in

2 1/16 in 2 3/8 in 2 7/6 in

3 3/4 in 3 11/16 in

in

1.350 in to 1.590 in 1.600 in to 1.750 in 1.950 in to 2.070 in 2.250 in to 2.380 in 2.650 in to 2.860 in

3.100 in to 3.340 in 3.400 in to 3.660 in

Hot Knives Bench-Mount Handheld

# Find even MORE on Grainger.com®

1-800-GRAINGER (472-4643)



# 🏼 🇱 TECHFLEX