



Ring/Stud
Mount
45EX57



Band Mount
4MB96




**Permanent Split Capacitor
Room Air Conditioner Motors**


- Enclosure: open air-over
- Thermal protection: auto
- Service factor: 1.0
- Bearings: sleeve, except 45EX57 to 45EX60, 4MB88 are ball/sleeve
- Duty: continuous

For room air conditioners, evaporative coolers, remote fan coil units, and other shaft-mounted fan and blower applications.

Ring Mount
4ME15

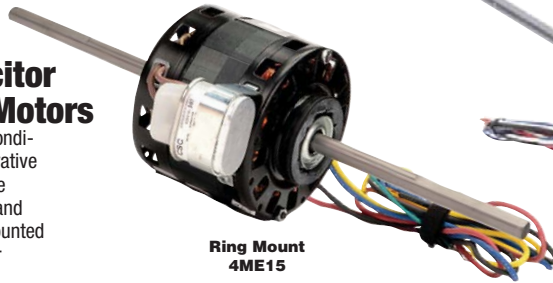

Cradle-Base
Mount
4UU33

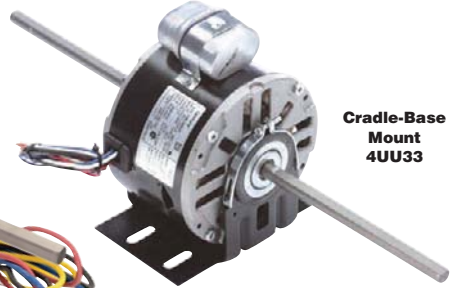

HP	Nameplate RPM	Rotation	Voltage	Full Load Amps	Mounting	Ring to Ring Center	Resilient Ring Dia.	Shaft Dia.	Shaft Length	Length Less Shaft	Max. Ambient Temp.	Mfr. Model	Brand	Item No.	Capacitor Req.
42Y Frame, 4 3/8 in Body Dia., 4 Speed															
1/10	1,075	CW/CCW	115V AC	1.70	Cradle Base	5 in	2 1/2 in	1/2 in	10 in	5 3/8 in	60 °C	5WJC1	Dayton	5WJC1	Included
42Y Frame, 4 1/8 in Body Dia., 3 Speed															
1/10	1,550	CW/CCW	115V AC	1.43	Ring/Stud	4 9/16 in	2 1/2 in	1/2 in	6 3/4 in	4 15/16 in	40 °C	45EX57	Dayton	45EX57	Included
	1,550	CW/CCW	115V AC	1.50	Ring/Stud	4 1/2 in	2 1/2 in	3/8 in	6 3/4 in	4 29/32 in	40 °C	45EX60	Dayton	45EX60	Included
42Y Frame, 4 1/8 in Body Dia., 4 Speed															
1/8	1,550	CW/CCW	115V AC	2.5	Ring/Stud	5 in	2 1/2 in	1/2 in	6 3/4 in	5 7/16 in	40 °C	45EX59	Dayton	45EX59	Included
1/8	1,550	CW/CCW	115V AC	1.90	Ring/Stud	4 7/8 in	2 1/2 in	1/2 in	6 3/4 in	4 15/16 in	40 °C	45EX58	Dayton	45EX58	Included
42Y Frame, 5 in Body Dia., 1 Speed															
1/8	1,075	CCWLE	208-230V AC	1.40	Band	—	—	1/2 in	6 1/4 in	3 11/16 in	40 °C	OYK6518	Century	4MB96	2MDV4
1/10	1,500	CCWLE	208-230V AC	0.70	Cradle Base	4 1/4 in	2 1/2 in	1/2 in	9 5/16 in	4 11/16 in	40 °C	9652	Century	4UU18	Included
42Y Frame, 5 in Body Dia., 3 Speed															
1/8	1,550	CCWLE	208-230V AC	1.80	Ring	—	—	1/2 in	6 3/8 in	3 13/16 in	40 °C	DCA4522	Century	4ME15	Included
1/8, 1/8, 1/10	1,625	CCWLE	208-230V AC	1.00, 0.76, 0.61	Cradle Base	5 in	2 1/2 in	1/2 in	9 3/16 in	4 15/16 in	40 °C	467A	Century	4UU24	Included
1/8	1,075	CCWLE	115V AC	2.00	Cradle Base	4 3/16 in	2 1/2 in	1/2 in	9 13/16 in	4 5/16 in	40 °C	DBL6503	Century	4UU21	Included
1/8	1,075	CCWLE	277V AC	0.83	Ring	4 in	2 1/2 in	1/2 in	8 1/2 in	4 7/16 in	40 °C	596	Century	4UB79	2MDV4
1/8, 1/12, 1/14	1,075	CCWLE	115V AC	1.62	Cradle Base	4 1/2 in	2 1/2 in	1/2 in	9 5/16 in	4 15/16 in	40 °C	945A	Century	4UU20	Included
1/10, 1/20, 1/30	1,500	CCWLE	115V AC	1.20, 0.70, 0.40	Cradle Base	4 1/2 in	2 1/2 in	1/2 in	9 5/16 in	4 15/16 in	40 °C	945A	Century	4UU20	Included
1/10, 1/12, 1/15	1,625	CCWLE	115V AC	1.30/1.00/0.70	Cradle Base	4 1/8 in	2 1/2 in	1/2 in	9 3/16 in	4 1/16 in	40 °C	DBL4500V1	Century	4UU16	Included
42Y Frame, 5 in Body Dia., 4 Speed															
1/8	1,625	CW/CCW	115V AC	2.7	Cradle Base	4 11/16 in	2 1/2 in	1/2 in	10 in	5 1/8 in	60 °C	5WJC3	Dayton	5WJC3	Included
1/8, 1/8, 1/10, 1/15	1,625	CCWLE	115V AC	2.2, 1.60, 1.10, 0.90	Cradle Base	5 in	2 1/2 in	1/2 in	9 5/16 in	5 7/16 in	40 °C	9476A	Century	4UU22	Included
1/8	1,075	CW/CCW	277V AC	0.72	Cradle Base	4 11/16 in	2 1/2 in	1/2 in	8 1/2 in	5 1/8 in	60 °C	5WJC2	Dayton	5WJC2	Included
1/10	1,075	CCWLE	115V AC	1.70	Cradle Base	4 in	—	1/2 in	10 3/8 in	3 9/16 in	40 °C	362A	Century	4MB94	2MDV4
1/10	1,050	CW/CCW	115V AC	1.62	Cradle Base	4 1/4 in	2 1/2 in	3/8 in	10 1/2 in	4 5/8 in	60 °C	5WJCO	Dayton	5WJCO	Included
1/10	1,050	CW/CCW	277V AC	0.70	Ring	4 1/4 in	2 1/2 in	1/2 in	8 1/2 in	4 5/8 in	60 °C	5WJA9	Dayton	5WJA9	Included
1/10, 1/12, 1/15, 1/20	1,075	CCWLE	115V AC	1.70, 1.60, 0.90, 0.80	Cradle Base	4 1/8 in	2 1/2 in	1/2 in	9 3/16 in	4 3/8 in	40 °C	DBL6501V1	Century	4UU17	Included
1/10, 1/15, 1/20, 1/25	1,075	CCWLE	208-230V AC	0.70, 0.50, 0.40, 0.30	Cradle Base	4 1/8 in	2 1/2 in	1/2 in	9 3/16 in	4 1/16 in	40 °C	DB6502V1	Century	4UU19	Included
1/15	1,050	CW/CCW	115V AC	1.40	Cradle Base	4 3/4 in	2 1/2 in	1/2 in	10 1/2 in	5 5/8 in	60 °C	5WJA8	Dayton	5WJA8	Included
1/15, 1/20, 1/25, 1/35	1,075	CCWLE	115V AC	1.20, 0.80, 0.70, 0.60	Cradle Base	4 1/4 in	2 1/2 in	1/2 in	11 in	4 3/4 in	40 °C	9474	Century	4MA85	2MDV4
1/20	1,075	CW/CCW	115V AC	0.90	Cradle Base	4 15/16 in	2 1/2 in	1/2 in	10 1/16 in	5 3/8 in	60 °C	5WJA7	Dayton	5WJA7	Included
48Y Frame, 5 1/2 in Body Dia., 2 Speed															
1/4	1,625	CCWLE	115V AC	2.00	Cradle Base	4 3/8 in	2 1/2 in	1/2 in	7 1/2 in	4 9/16 in	40 °C	DSB1024	Century	4UU28	Included
1/4	1,625	CCWLE	230V AC	1.00	Cradle Base	4 3/8 in	2 1/2 in	1/2 in	7 1/2 in	4 11/16 in	40 °C	DSB1024H	Century	4UU29	Included
1/4	1,625	CW/CCW	115V AC	2.00	Cradle Base	4 11/16 in	2 1/2 in	1/2 in	7 1/2 in	4 11/16 in	40 °C	DSB1016R	Century	4UU30	Included
48Y Frame, 5 1/2 in Body Dia., 3 Speed															
1/2	1,075	CCWLE	115V AC	5.0	Ring/Stud	—	2 1/4 in	1/2 in	7 25/64 in	5 7/8 in	40 °C	RAL1056	Century	4MA77	* 2MDV7
	1,625	CCWLE	115V AC	6.0	Ring/Stud	—	2 1/4 in	1/2 in	7 19/32 in	5 5/8 in	40 °C	RAL1054	Century	4MB15	2MDV4
	1,075	CCWLE	208-230V AC	2.1	Ring/Stud	—	2 1/4 in	1/2 in	7 19/32 in	5 5/8 in	60 °C	RAL1056	Century	4MA65	2MDV6
	1,625	CCWLE	208-230V AC	3.0	Ring/Stud	—	2 1/4 in	1/2 in	7 19/32 in	5 5/8 in	40 °C	RAL1054	Century	4MA67	* 2MDV4
	1,075	CCWLE	115V AC	5.0	Ring/Stud	—	2 1/4 in	1/2 in	7 57/64 in	5 5/8 in	40 °C	RAL1036	Century	4MA59	2MDV4
1/8	1,075	CCWLE	208-230V AC	1.09	Ring/Stud	—	2 1/4 in	1/2 in	8 3/16 in	5 1/2 in	60 °C	RAL1036	Century	4MA61	2MDV4
	1,625	CCWLE	208-230V AC	2.00	Ring/Stud	—	2 1/4 in	1/2 in	7 25/64 in	5 1/2 in	50 °C	RAL1034	Century	4MA63	2MDV4
	1,075	CCWLE	115V AC	5.0	Ring/Stud	—	2 1/4 in	1/2 in	9 7/8 in	4 3/4 in	40 °C	RAL1026A	Century	4MA79	2MDV4
1/4	1,625	CCWLE	115V AC	3.0	Ring/Stud	—	2 1/4 in	1/2 in	7 19/32 in	4 3/8 in	40 °C	RAL1024	Century	4MA99	2MDV4
	1,075	CCWLE	208-230V AC	1.05	Ring/Stud	—	2 1/4 in	1/2 in	7 19/32 in	4 3/8 in	60 °C	RAL1026	Century	4MA57	2MDV4
	1,075	CCWLE	115V AC	2.0	Ring/Stud	—	2 1/4 in	1/2 in	8 3/32 in	4 3/8 in	40 °C	RAL1016	Century	4MA53	* 2MDV4
	1,075	CCWLE	115V AC	3.0	Cradle Base	4 3/8 in	2 1/2 in	1/2 in	7 1/2 in	4 7/16 in	40 °C	DSB1016	Century	4UU33	Included
	1,075	CCWLE	208-230V AC	0.96	Ring/Stud	—	2 1/4 in	1/2 in	8 19/64 in	4 1/4 in	40 °C	RAL1016	Century	4MA55	2MDV4
1/8	1,075	CCWLE	115V AC	2.00	Ring/Stud	—	2 1/4 in	1/2 in	8 19/64 in	4 1/4 in	60 °C	RAL1006	Century	4MA51	2MDV4
1/15	1,075	CCWLE	115V AC	0.63	Ring	4 3/8 in	2 1/2 in	1/2 in	5 57/64 in	4 5/8 in	40 °C	RAL10156	Century	4UB73	† 2MDV4
3/4	1,075	CCWLE	208-230V AC	3.1	Ring/Stud	—	2 1/4 in	1/2 in	7 25/64 in	5 7/8 in	40 °C	RAL076	Century	4MA69	2MDV6
48Y Frame, 5 1/2 in Body Dia., 4 Speed															
1/2	1,075	CW/CCW	115V AC	6.5	Cradle Base	5 1/2 in	2 1/2 in	1/2 in	8 1/2 in	5 1/8 in	60 °C	5WJC5	Dayton	5WJC5	Included
1/4	1,625	CW/CCW	115V AC	3.4	Cradle Base	5 in	2 1/2 in	1/2 in	8 1/2 in	3 3/8 in	60 °C	5WJC4	Dayton	5WJC4	Included
48YZ Frame, 5 1/2 in Body Dia., 2 Speed															
1/4	1,075	CCWLE	115V AC	4.0	Cradle Base	4 1/2 in	2 1/2 in	1/2 in	7 1/2 in	4 7/16 in	40 °C	DSB1026	Century	4UU26	Included
56Y Frame, 6.5 in Body Dia., 1 Speed															
3/4	1,075	CCW	208-230V AC	6.0	Cradle Base	—	—	3/4 in	7 1/2 in	9 1/2 in	40 °C	C024	Century	4MB88	2MDV7

* 60/50 Hz. † Capacitor selection: single blower wheel/2MDV2, double blower wheel/2MDV3, triple blower wheel/2MDV4.