Heavy-Duty High Flow (Oil, ATF) Pumps ARO WESTWARD

ARO Thunder Pumps—Stall-free, ice-free air motor design. 85dB. Include 2" bung adapter. 1/4" FNPT air inlet.

Westward Pumps—Oil pumps come complete with bung nut. 3APF2 features all-metal, industrial-quality construction. With spigot and piping connectors. 3APE7 composite construction allows the pump to operate without using a lubricator unit in the air supply.

Pump Packages-4ZT12 and 5TCU6 include pump, control handle, meter (pts.), drum cover, and 6-ft. hose. 4TZ12 also has a band dolly.

45CT51's 3:1 pump transfers oils up to SAE 130 up to 30m; with 3.5m hose. 45CT52's 5:1 pump dispenses oils up to SAE 240 up to 50m; with hose reel. Both include steel trolley, air-operated oil pump, digital oil control gun, and miniature filter-regulator/lubricator combo with gauge.

_Pump Ratio	Air Motor Size (in.)	Container Size	Working Flow Max. (gpm)	Max. Air Inlet PSI	Outlet Pressure Max. (psi)	Fluid Outlet Thread (in.)	Brand	ltem No.
Pumps								
	2	Stub	6	150	450	1/2 FNPT	ARO	4KK55
3:1	2	55 gal.	6	150	450	1/2 FNPT	ARO	4KK57
3.1	2 ½ in	Stub	3.7 gpm	115 psi	345 psi	1/2 FNPT	Westward	3APF2
	21/2	275 gal.	7.5	115	345	1/2 MNPT	Westward	5TCU1
	3	Stub	6	150	750	1/2 FNPT	ARO	4KK59
	3	16 gal.	6	150	750	1/2 FNPT	ARO	4KK60
	3	55 gal.	6	150	750	1/2 FNPT	ARO	4KK61
5:1	3	275 gal.	6	150	750	1/2 FNPT	ARO	4KK62
J.1	—	Stub	4 gpm	145 psi	725 psi	1/2 in FNPT	Westward	3APE7
	21/2	2.8 gal.	6.6	115	580	3/4 MNPT	Westward	5TCU2
	21/2	55 gal.	6.6	115	580	3/4 MNPT	Westward	5TCU4
	21/2	275 gal.	6.6	115	580	3/4 MNPT	Westward	5TCU5
Pump Package	s							
	2	16 gal.	6	150	450	_	ARO	4ZT12
3:1	2 1/2 in	16 gal	7.5 gpm	115 psi	345 psi	3/4 MNPT	Legacy	5TCU6
	2 1/2 in	55 gal	3.7 gpm	145 psi	435 psi	1/2	Westward	45CT51
5:1	2 ½ in	56 gal	4.7 gpm	145 psi	725 psi	1/2	Westward	45CT52



5NUD6

LINCOLN Fluid Transf Pumps	fer	
Transfer oil, diesel, kerosene, coolants, petroleum-based fluids, hydraulic oils, and automatic transmission fluid. Fit 16- and 55-gal. containers with 2" bung opening. 14U106 is FM Certified for gasoline transfer.	V	14U105
Includes	Max Outp	
Drum Pump 6 Ft Hose		
U FL HUSE	4 gpi	III 1000 OWD2

WESTWARD

Fluid Transfer Pumps

Lever-Action-5NUD4 is for dispensing oils and antifreeze from 15- to 55-gal. drums

5NUD5 is for dispensing heavy oils from 5-gal, pails. Handle has 3 settings for use with oils of different viscosities.

Rotary-Come complete with 2" cast-iron bung nut and 3-pc. threaded suction tube for use on 15- to 55-gal. drums. 5NUD6 works in both directions, to empty and refill drums.

Includes	Туре	Output	ltem No.
Lever Action Barrel Pump			
11/2" and 2" Drum Bung, Steel Discharge Spout, and Telescopic Suction Tube	Lever Action	10 oz. per Stroke	5NUD4
Lever Action Bucket Pump			
18" Pump with 12" Drum Cover, and 4-ft PVC Hose with Steel Discharge Spout	Oil	Up to 4 oz per Stroke	5NUD5
Rotary Transfer Pump			
Cast Iron Pump and Handle with Steel Discharge Spout	Oil	8.5 oz. Per Rotation	5NUD6
Aluminum Die Cast Pump and Handle with Security Locking Latch and Steel Discharge Spout	Oil and Fuel	7 oz. Per Rotation	5NUD7
Aluminum Die Cast Pump and Handle with Security Locking Latch and Steel Discharge with 8-ft. Discharge Hose	Oil and Fuel	1 Pint Per Rotation	5NUD8



1385-H

1387

10 gpm

10 gpm

6WB29

14U105

14U106

Westward

Digital Oil Control Gun

WESTWARD


Rotary Pump 8 ft Hose, Aluminum Nozzle and Hanger 8 Ft Hose, Flame Arrestor And

Vacuumbreaker, Non-sparking Dispensenozzle And Hose Holder

In-Line Grease/Oil Meters

Measure the flow rate in grease/oil filling systems.

Item	Operating Pressure (psi)	Dial/Digit Totals	Dial Graduation	ltem No.
Digital Grease Meter	8,000 psi	9999 lbs.	_	30RZ31
Digital Oil Meter	1,000 psi	99999.9 Units	0.001 Units	15F217
Mechanical Oil Meter	1,000 psi	99999.9 qt	0.10 qt	15F216

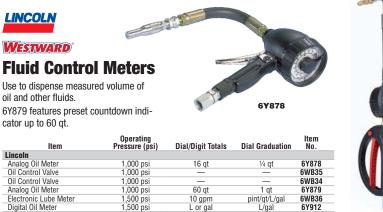

999,999.9 Units

0.001 Units

33RL88



6WB36

Sign in to Grainger.com[®] to see YOUR Pricing and MORE

1,000 psi