
FLEET & VEHICLE MAINTENANCE Vehicle Lighting


Scan. Order. Done.







Work Light 1,100 lm 12V 12 W — 5 in — — — BZ501-5 412A32 J.W. Speaker 1,200 lm 12 to 30V 15 W Hardwired 3 ¼ in 2 ¾ in — — — BZ551-5 412A34 J.W. Speaker 675 lm 12 to 48V DC 1 A DT04-2P Connector 6 ¼ in 1 ½ in Clear Polycarbonate Polycarbonate 783XD 45RJ27 Maxxima 675 lm 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 3 ½ in Clear Polycarbonate Polycarbonate 783XD 45RJ27 Mod Light 12 to 24V DC 0.5 A @24V DC Pigtail 5 ¼ in 3 ¼ in Clear Polycarbonate Polycarbonate MWL-04 8PMH4 Hood Light 1,400 lm 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 5 ¼ in Clear Polycarbonate Aluminum MWL-26A 347676 1,400 lm 12 to 24V DC 0.5 A #adfwired 6 in 5 ¼ in <th></th> <th>700 IM</th> <th>24 V</th> <th>U.7 A</th> <th>Hardwired</th> <th>5 %4 IN</th> <th>3 IN</th> <th>_</th> <th>_</th> <th>_</th> <th>63741-5</th> <th>411240</th>		700 IM	24 V	U.7 A	Hardwired	5 %4 IN	3 IN	_	_	_	63741-5	411240
J.W. Speaker Flood Light 675 lm 12 to 48V DC 1 A DT04-2P Connector 6 ½ in 1 ½ in Clear Polycarbonate Polycarbonate 783XD 45RJ27 Maxxima 400 lm 12 to 48V DC 1 A DT04-2P Connector 6 ½ in 1 ½ in Clear Polycarbonate Polycarbonate 783XD 45RJ27 Maxxima 400 lm 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 3 ½ in Clear Polycarbonate Polycarbonate 783XD 45RJ28 Flood Light 675 lm 12 to 24V DC 0.5 A @24V DC Pigtail 5 ½ in 3 ¼ in Clear Polycarbonate Aluminum MWL-26-A 34T692 Flood Light 1,400 lm 12 to 24V DC 0.5 A @26V DC Pigtail 6 ¼ in 3 ¼ in Clear Polycarbonate Aluminum MWL-26-A 34T692 1,400 lm 12 to 24V DC 0.5 A @26V DC Pigtail 6 ¼ in 3 ¼ in Clear Polycarbonate Aluminum MWL-26-A 34T692 1,000	Work Light	1,100 lm	12V	12 W		5 in	5 in	_	_	_	BZ501-5	412A32
Flood Light 675 lm 675 lm 675 lm 470 lm 12 to 48V DC 12 to 48V DC 1A 14 DT04-2P Connector DT04-2P Connector 6 ½ in 6 ½ in 1 ½ in Clear Clear Polycarbonate Polycarbonate Polycarbonate Polycarbonate 783XD 45FJ27 45FJ28 Maxxima 400 lm 12 to 48V DC 0.5 A @24V DC Pigtali 6 in 5 ½ in 3 ½ in Clear Polycarbonate Polycarbonate 783XD 45FJ27 Maxxima 400 lm 12 to 24V DC 0.5 A @24V DC Pigtali 6 in 3 ½ in Clear Polycarbonate Polycarbonate NUL-26A 8PMH4 Hood Light 675 lm 12 to 24V DC 0.5 A @24V DC Pigtali 6 in 5 ½ in Clear Polycarbonate Polycarbonate NUL-26A 8FMH4 Hood Light 1.400 lm 12 to 24V DC 0.5 A @24V DC Pigtali 6 in 5 ½ in Clear Polycarbonate Aluminum MWL-26A 8FMH4 Hood Light 1.400 lm 12 to 24V DC 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate Aluminum <th< td=""><td>-</td><td>1,200 lm</td><td>12 to 30V</td><td>15 W</td><td>Hardwired</td><td>3 ¾ in</td><td>2 ¾ in</td><td>_</td><td>—</td><td>—</td><td>BZ551-5</td><td>412A34</td></th<>	-	1,200 lm	12 to 30V	15 W	Hardwired	3 ¾ in	2 ¾ in	_	—	—	BZ551-5	412A34
Flood Light 675 lm 12 to 48V DC 1 A DT04-2P Connector 6 ¼ in 1 ½ in Clear Polýcarbonate Polýcarbonate 783XD 45RJ28 Maxxima 400 lm 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 3 ½ in Clear Polýcarbonate Polýcarbonate MWL-04 8PMH4 Flood Light 12 to 24V DC 280 mA @24V DC Pigtail 5 % in 3 % in Clear Polycarbonate Aluminum MWL-04 8PMH4 Hood Light 1,400 lm 12 to 24V DC 280 mA @24V DC Pigtail 6 in 5 % in 3 % in Clear Polycarbonate Aluminum MWL-264 34TG92 36X076 1,400 lm 12 to 24V DC 0.5 A @36V DC Pigtail 6 % in 3 % in Clear Polycarbonate Aluminum MWL-293 36X076 1,500 lm 12 to 24V DC 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate MWL-393 440A21 Work Light 2,100 lm 12 to 24V DC	J.W. Speaker											
Maxxima of 5 int 1 2 to 400 DC TA D104-2P Collinector 6 % int 1 9 2 int Clear Polycarbonate Aluminum MWL-04 8PMH4 Flood Light 675 int 12 to 24V DC 0.5 A @24V DC Pigtail 6 % int 3 ½ in Clear Polycarbonate Aluminum MWL-04 8PMH4 Flood Light 675 int 12 to 24V DC 0.5 A @24V DC Pigtail 6 % int 3 ½ in Clear Polycarbonate NUL-26A 84TG92 1,400 Im 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 5 % in 3 % in Clear Polycarbonate Aluminum MWL-26A 36XD76 1,500 Im 12 to 24V DC 0.5 A @24V DC Pigtail 6 % in 3 % in Clear Polycarbonate Aluminum MWL-26A 36XD76 1,000 Im 12 to 24V DC 0.5 A @36V DC Pigtail 6 % in 1 % in Clear Polycarbonate Aluminum MWL-26X 36XD76 Work Light 2,100 Im 12 to 24V DC 0.5 A	Flood Light		12 to 48V DC	1 A	DT04-2P Connector	6 1⁄8 in	1 ½ in	Clear	Polycarbonate	Polycarbonate		
Hood Light 400 Im 12 to 24V DC 0.5 A @24V DC Pigtail 6 in 3 ½ in Clear Polycarbonate Aluminum MWL-04 8PMH4 Flood Light 675 Im 12 to 24V DC 280 mA @24V DC Pigtail 5 % in 3 % in Clear Polycarbonate Aluminum MWL-04 8PMH4 1,400 Im 12 to 24V DC 0.9 A @24V DC Pigtail 6 in 5 % in Clear Polycarbonate Aluminum MWL-04 8PMH4 1,550 Im 12 to 36V DC 0.9 A @24V DC Pigtail 6 % in 3 % in Clear Polycarbonate Aluminum MWL-29 36KD76 1,000 Im 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate Aluminum MWL-39 440A20 Work Light 2,100 Im 12 to 36V DC 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate MWL-39 440A20 Stool SA Hardwired 6 in 1 ½ in Clear Polycarbonate		675 lm	12 to 48V DC	1 A	DT04-2P Connector	6 1⁄8 in	1 ½ in	Clear	Polycarbonate	Polycarbonate	783XD	45RJ28
Flood Light 675 lm 12 to 24V DC 280 mA @24V DC Pigtail 5 % in 3 % in Clear Polycarbonate Polycarbonate MWL-26-A 347692 1,400 lm 12 to 24V DC 0.9 A @24V DC Pigtail 6 in 5 % in 3 % in Clear Polycarbonate Polycarbonate Aluminum MWL-29 36XD76 1,550 lm 12 to 24V DC 0.5 A @36V DC Pigtail 6 ¼ in 3 % in Clear Polycarbonate Aluminum MWL-29 36XD76 1,000 lm 12 to 24V DC 0.5 A Bardwired 6 in 1 ½ in Clear Polycarbonate Aluminum MWL-30SP 36XD76 Vork Light 2,100 lm 12 to 24V DC 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate MWL-30SP 440A20 Work Light 2,100 lm 12 to 36V DC 1.6 A @36V, 4.5 A @12V Hardwired 10 % in 2 % in Clear Polycarbonate Aluminum MWL-42 440A17 2,000 lm 12 to 36V D	Maxxima											
Produ Light 1.400 lm 12 to 24V DC 0.9 A @24V DC Pigtail 6 in 5 ½ in Clear Polycarbonate Aluminum MWL-29 36XD76 1.550 lm 12 to 24V DC 0.5 A @36V DC Pigtail 6 ¼ in 3 % in Clear Polycarbonate Aluminum MWL-29 36XD76 1.000 lm 12 to 24V DC 0.5 A @36V DC Pigtail 6 ¼ in 3 % in Clear Polycarbonate Aluminum MWL-50SP 36XD76 Work Light 2.100 lm 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate Aluminum MWL-39 440A20 Work Light 2.100 lm 12 to 24V DC 0.8 to 0.5 A Hardwired 10 % in 1 ½ in Clear Polycarbonate Aluminum MWL-44 440A17 5_000 lm 12 to 24V DC 1.6 A @36V, 4.5 A @12V Hardwired 10 % in 2 ¼ in Clear Polycarbonate Aluminum MWL-44 440A17 6 ant 1.9 1.6 0 6 4V DC 1.6 A @36V, 4.5 A @12V <td rowspan="4">Flood Light</td> <td>400 lm</td> <td>12 to 24V DC</td> <td>0.5 A @24V DC</td> <td>Pigtail</td> <td></td> <td></td> <td>Clear</td> <td>Polycarbonate</td> <td>Aluminum</td> <td>MWL-04</td> <td>8PMH4</td>	Flood Light	400 lm	12 to 24V DC	0.5 A @24V DC	Pigtail			Clear	Polycarbonate	Aluminum	MWL-04	8PMH4
1,400 Im 12 to 24V DC 0.9 A @24V DC Pigtal 6 ¼ in 3 ½ in Clear Polycarbonate Aluminum MWL-50SP SokD76 1,550 Im 12 to 36V DC 0.5 A @36V DC Pigtal 6 ¼ in 3 ½ in Clear Polycarbonate Aluminum MWL-50SP SokD76 Vork Light 2,100 Im 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1½ in Clear Polycarbonate Aluminum MWL-39 440A20 Work Light 2,100 Im 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1½ in Clear Polycarbonate Aluminum MWL-39 440A20 Railhead Gear 5,000 Im 12 to 36V DC 1.6 A @36V, 4.5 A @12V Hardwired 10 % in 2 ¼ in Clear Polycarbonate Aluminum MWL-42 440A17 Railhead Gear Cont Light 2,900 Im 9 to 64V DC 1.75 A @12V DC Hardwired 6 ¾ in 2 ¾ in Clear Polycarbonate Aluminum MWL-42 440A17 <					Pigtail	5 1 in		Clear	Polycarbonate	Polycarbonate		
1.000 lm 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1½ in Clear Polycarbonate Polycarbonate MWL-39 440A20 Work Light 2,100 lm 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1½ in Clear Polycarbonate Aluminum MWL-42 440A17 5,000 lm 12 to 36V DC 1.6 A@36V, 4.5 A@12V Hardwired 10 % in 2 % in Clear Polycarbonate Aluminum MWL-42 440A17 Railhead Gear Could light 2,900 lm 9 to 64V DC 1.75 A@12V DC Hardwired 6 ¾ in 2 ¾ in Clear Polycarbonate Aluminum KE-HDWL-30 20HJ60				0.9 A @24V DC	Pigtail			Clear	Polycarbonate	Aluminum	MWL-29	
Work Light 2,100 Im 12 to 24V DC 0.8 to 0.5 A Hardwired 6 in 1 ½ in Clear Polycarbonate Aluminum MWL-42 440A17 5,000 Im 12 to 36V DC 1.6 A @36V, 4.5 A @12V Hardwired 10 % in 2 % in Clear Polycarbonate Aluminum MWL-42 440A17 Railhead Gear Cost Light 2,900 Im 9 to 64V DC 1.75 A @12V DC Hardwired 6 % in 2 % in Clear Polycarbonate Aluminum MWL-81 494P45 Reset Light 2,900 Im 9 to 64V DC 1.75 A @12V DC Hardwired 6 % in 2 % in Clear Polycarbonate Aluminum KE-HDWL-30 20HJ60				0.5 A @36V DC	Piğtail	6 ¼ in		Clear	Polycarbonate	Aluminum		
5,000 Im 12 to 36V DC 1.6 A @36V, 4.5 A @12V Hardwired 10 % in 2 % in Clear Polycarbonate Aluminum MWL-61 494P45 Railhead Gear Coast Light 2,900 Im 9 to 64V DC 1.75 A @12V DC Hardwired 6 % in 2 % in Clear Polycarbonate Aluminum KE-HDWL-30 20HJ60	Work Light	1,000 lm	12 to 24V DC	0.8 to 0.5 A	Hardwired	6 in	1 ½ in	Clear	Polycarbonate	Polycarbonate	MWL-39	440A20
Railhead Gear Sport Light 2,900 lm 9 to 64V DC 1.75 A @12V DC Hardwired 6 ¾ in 2 ¾ in Clear Polycarbonate Aluminum KE-HDWL-30 20HJ60				0.8 to 0.5 A	Hardwired	6 in		Clear	Polycarbonate	Aluminum	MWL-42	440A17
Sonat Light 2,900 lm 9 to 64V DC 1.75 A @12V DC Hardwired 6 ¾ in 2 ¾ in Clear Polycarbonate Aluminum KE-HDWL-30 20HJ60		5,000 lm	12 to 36V DC	1.6 A @36V, 4.5 A @12V	Hardwired	10 % in	2 1/16 in	Clear	Polycarbonate	Aluminum	MWL-61	494P45
	Railhead Gear											
Spor Light 5,100 lm 9 to 64V DC 3.2 A Hardwired 8 ½ in 2 ½ in Clear Polycarbonate Aluminum KE-HDWL-60 20HJ61	Spot Light		9 to 64V DC	1.75 A @12V DC	Hardwired	6 ¾ in	2 3⁄4 in	Clear	Polycarbonate	Aluminum		
		5,100 lm	9 to 64V DC	3.2 A	Hardwired	8 ½ in	2 1/2 in	Clear	Polycarbonate	Aluminum	KE-HDWL-60	20HJ61

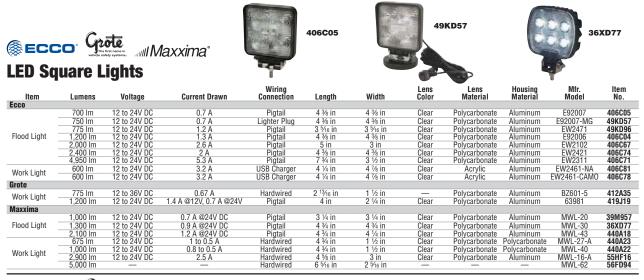

ECCO	vehicle safety systems.	Maxxima®	55NP89	55NP92		411Z70	55HF	17
Item	Lumens	Voltage	Current Drawn	Wiring Connection	Length	Width	Mfr. Model	ltem No.
Ecco		•						
	875	12 to 24V DC	0.7 A	Hardwired	9 in	2 in	EW3109	55NP88
	2,175	12 to 24V DC	1.7 A	Hardwired	20 in	2 in	EW3120	55NP89
Work Light Bar	2,800	12 to 24V DC	2.7 A	Hardwired	14 in	2 5⁄8 in	EW3214	55NP92
Ū.	3,475	12 to 24V DC	3.0 A	Hardwired	32 in	2 in	EW3132	55NP90
	4,750	12 to 24V DC	4.3 A	Hardwired	25 in	2 5⁄8 in	EW3225	55NP93
Grote								
	2,708 lm	12 to 24V DC	1.5 A @24V, 3.5 A @12V	Pigtail	14 in	3 ½ in	64J11	411Z68
Work Light Bar	5.416 lm	12/24V	3 A @24 V. 7 A @12 V	Pigtail	24 in	3 ½ in	64J21	411Z69
	8,124 lm	12 to 24V DC	10.5 A @12V, 5.25 A @24V	Pigtail	30 in	3 ½ in	64J31	411Z70
Maxxima								
Work Light	850 lm			Wire Leads	13 in	1 1/16 in	M84420-E	55YF01
	3,000 lm	12.8V DC	3.4 A	2-Pin Connector	30 in	2 in	MTBL-10-A	55HF17
	3,000 lm		_	Wire Leads	24 5/16 in	1 5⁄16 in	MWBL-1-A	55YE97

904 **GRAINGER**® Find even MORE on Grainger.com®

1-800-GRAINGER (472-4643)