



**WESTWARD**  
**In-Line Grease/Oil Meters**

Measure the flow rate in grease/oil filling systems.

Item	Operating Pressure (psi)	Dial/Digit Totals	Dial Graduation	Item No.
Digital Grease Meter	8,000 psi	9999 lbs.	—	30RZ31
Digital Oil Meter	1,000 psi	99999.9 Units	0.001 Units	15F217
Mechanical Oil Meter	1,000 psi	99999.9 qt	0.10 qt	15F216



**Hose Reel Kits**

Reels consist of heavy-gauge steel with corrosion-resistant components. Mount in a variety of positions.

**Grease Hose Reel Kit**—Comes complete with booster gun, 3-ft. lead-in hose with swivel, and 50-ft. grease hose.

**Oil Hose Reel Kit**—Includes electronic metered oil control gun with 14" flexible extension, 3-ft. lead-in hose with swivel, and 50-ft. oil hose.

Item	Max. Pressure (psi)	Mfr. Model	Item No.
Grease Hose Reel Kit	5,000 psi	L8515K	4ZT51
Oil Hose Reel Kit	2,000 psi	L8525K	4ZT52




**Multi-Pressure Bucket Pump**

Three-position adjustable lever adapts pump to lubricant type and operating conditions.



Cap.	Outlet Pressure Max. (psi)	Outlet Size	Output	Includes	Item No.
5 gal.	5000	3/8" NPTF	0.33 oz. per Stroke	Button Head Fitting, Hose and Coupler Assembly, Plug Button	48WC51

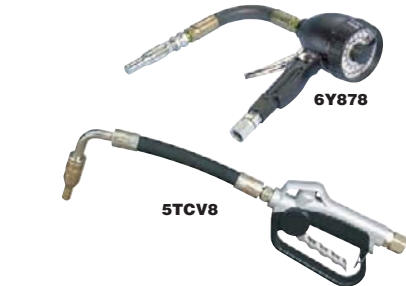

**Fluid Control Meters**

Use to dispense measured volume of oil and other fluids. 6Y879 features preset countdown indicator up to 60 qt.



Item	Operating Pressure (psi)	Dial/Digit Totals	Dial Graduation	Mfr. Model	Item No.
<b>Lincoln</b>					
Analog Oil Meter	1,000 psi	16 qt	1/4 qt	877	6Y878
Oil Control Valve	1,000 psi	—	—	758F	6WB35
Oil Control Valve	1,000 psi	—	—	776	6WB34
Analog Oil Meter	1,000 psi	60 qt	1 qt	3867	6Y879
Electronic Lube Meter	1,500 psi	10 gpm	pint/qt/L/gal	980	6WB36
Digital Oil Meter	1,500 psi	L or gal	L/gal	967	6Y912
<b>Westward</b>					
Oil Control Gun	—	—	—	—	5TCV8
Digital Oil Control Gun	1,000 psi	999,999.9 Units	0.001 Units	33RL88	33RL88

**High Flow Transfer Pumps**

LINCOLN

**Single-Acting Oil Pumps**—Self-priming. 1XGN6 is designed for placement in 25- to 275-gal. bulk tanks with supplied bung bushing.

**Bare Stub Oil Pumps**—1XGP1 self-priming pump develops a suction head up to 25 ft. of oil after priming.

LEGACY

**Stub Design**—Pumps are nonicing and have muffled exhaust. Each includes 2" bung adapter. Optional Telescopic Suction Tube 4ZT43 is available to fit bulk tank containers. (Not for use with waste oil.)

Note: Choose the pump ratio for your particular application:

1:1 High Volume for transfer through short runs with small pressure drops. 3:1 Medium Volume for use in portable and stationary oil distribution systems composed of pipelines and/or hose reels and fluid meters. 5:1 Heavy-Duty High Volume for use in oil distribution systems with long pipelines and/or hose reels and fluid meters. Pump to multiple bays simultaneously.

Pump Ratio	Consumption @ 100 psi	Min. Air Inlet Pressure	Air Inlet psi	Max. Air Inlet psi	Max. Output	Air Inlet (in.)	Fluid Inlet Thread (in.)	Fluid Outlet Thread (in.)	Pump for Multiple Outlets	Mfr. Model	Item No.
<b>Lincoln</b>											
<b>Single-Acting</b>											
1:1	5 cfm	40	150	3.1 gpm	1/4-18	2"	Bung	1/2"	Yes	4475	1XGP4
3.5:1	7 cfm	40	120	6.0 gpm	1/4-18	2"	Bung	1/2"	Yes	4491	1XGN6
<b>Bare Stub</b>											
3:1	10 cfm	40	200	6.0 gpm	1/4"	1 1/8"	1.5"	1/2"	Yes	282396	1XGP1
5:1	10 cfm	40	200	6.0 gpm	1/4"	1 1/8"	1.5"	1/2"	Yes	84933	1XGN9
<b>Legacy</b>											
<b>Stub Design</b>											
1:1	7 cfm	40	140	14 gpm	1/4"	1"	3/4"	3/4"	No	L3510	4ZT44
3:1	5 cfm	40	140	9.25 gpm	1/4"	3/4"	3/4"	3/4"	Yes	L3530	4ZT45
<b>Optional Accessory</b>											
Telescopic Suction Tube										L3503	4ZT43



**Gear Oil Pump**

Includes pump, 5-gal. container, cover, 5-ft. hose, and discharge spout.



Description	Item No.
Lever-Action Handle	5TCU8



**Air-Operated Oil Transfer Pump Systems**

- Min. psi Inlet: 40
- Max. psi outlet: 200
- Max. flow: 6 gpm

Pump Ratio	Container Size	Includes	Mfr. Model	Item No.
3:1	55 gal.	Air Coupler, Air Nipple, Bung Bushing, Lubricant Hose and Air Hose, Volume Union Elbow	2424	2DPL2
3:1	250/275 gal.	Air/Lubricant Hose and Bung Bushing, Universal Suction Tube Kit	284168	2DPL4
5:1	16 gal.	Roll Around Base, Shut Off Valve	2535	2DPN3

