



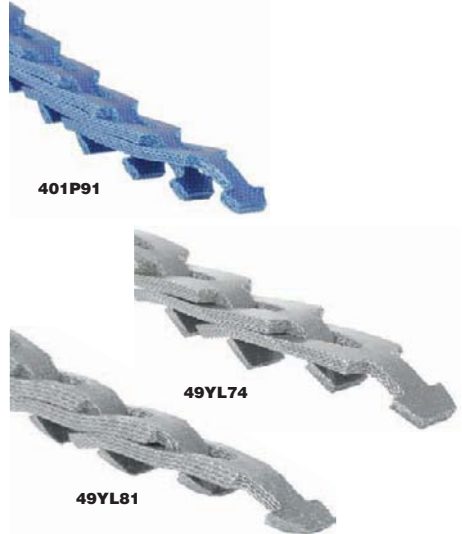

48ZY73

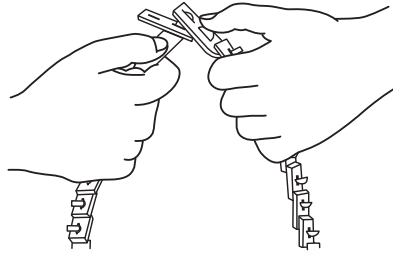

Premium Link Belts

- Composite polyurethane/polyester construction
- Superior resistance to oil, water, and chemicals
- Temp. range: -40° to 240°F

Belts can be easily installed without dismantling drives.

PowerTwist Drive V-Belts—This long-lasting, permanent upgrade for V-belt drives offers reduced drive vibration and fit-and-forget installation with no need to re-tension. The belts assemble to any length so you need not stock multiple belt sizes.

PowerTwist Wedge Belts—Heavy-duty abrasive-resistant belts are a drop-in upgrade for your rubber wedge belts in big shock-loaded applications with multi-belt drives. Easily adjust to any length within seconds.

PowerTwist Standard V-Belts—Quick replacement for failed rubber V-belts can be assembled to any length so you always have the right belt on hand.

PowerTwist Roller Drive Belts—Quickly and permanently replace belts on live roller conveyors. Drop-in replacement for B section V-belts on any live roller conveyor or 3/16" round profile belts on Rapistan Conveyor Systems.

Outside L	V-Belt Section	Top Width	Color	Mfr. Model	Item No.
PowerTwist Drive V-Belts					
25 ft	3L	3/8 in	Red	0405010	48ZY71
	4L, A	1/2 in	Red	0405030	48ZY73
	5L, B	5/8 in	Red	0405050	48ZY75
	C	7/8 in	Red	0405070	48ZY77
100 ft	3L	3/8 in	Red	0408010	48ZY72
	4L, A	1/2 in	Red	0408030	48ZY74
	5L, B	5/8 in	Red	0408050	48ZY76
	C	7/8 in	Red	0408070	48ZY78
PowerTwist Wedge Belts					
25 ft	3V	3/8 in	Blue	0460025	401P89
	5V	5/8 in	Blue	0460125	401P91
100 ft	3V	3/8 in	Blue	0460000	401P90
	5V	5/8 in	Blue	0460100	401P92

PowerTwist Standard Round Belts—Round-profile belts drop right into your existing equipment and are extremely flexible, making them ideally suited for use with small pulley/idler diameters. Replace round rubber or urethane belts.

Outside L	V-Belt Section	Top Width	Color	Mfr. Model	Item No.
PowerTwist Standard V-Belts					
5 ft	4L, A	1/2 in	Gray	0428035	49YL73
6 ft	5L, B	5/8 in	Gray	0428056	49YL76
25 ft	3L	3/8 in	Gray	0450025	49YL71
	4L, A	1/2 in	Gray	0450125	49YL74
	5L, B	5/8 in	Gray	0450225	49YL77
	C	7/8 in	Gray	0450325	49YL79
100 ft	3L	3/8 in	Gray	0450000	49YL72
	4L, A	1/2 in	Gray	0450100	49YL75
	5L, B	5/8 in	Gray	0450200	49YL78
	C	7/8 in	Gray	0450300	49YL80
PowerTwist Roller Drive V-Belts					
25 ft	B	5/8 in	Red	0410300-25	19RU04
100 ft	B	5/8 in	Red	0410300	19RU05
Overall Length					
25 ft	9/16 in	5 3/8 in	Gray	0451225	49YL81
100 ft	9/16 in	5 3/8 in	Gray	0451200	49YL82



3PEA7



3PEA8



ContiTech

Electronic Alignment and Tension Diagnostic Tools

Laser Alignment Tool—Confirms horizontal and vertical sheave alignment. Designed for sheaves 60mm dia. or greater. CE Certified.

TensionRite Belt Frequency Meter—Optical sensor indicates belt tension. Use on all rubber compound belts. CE Certified.

Description	Includes	Item No.
Laser Alignment Tool	(2) Magnet Targets, AA Battery	3PEA7
TensionRite® Belt Frequency Meter	(4) AA Batteries, Calibration Tuning Fork, Protective Case	3PEA8



31CD50



Tension Meter

Tension Master measures the vibration frequency of the actual belt, not the air around the belt, for a more accurate reading than competitive systems. The free downloadable app includes all the required belt parameters, requiring much less data input by the end user than other systems require. Can also be used to measure vibration frequency in any type of equipment. Includes tension meter, batteries, sensor, and adhesive pads.

Description	Mfr. Model	Item No.
Belt Tensioning Kit	BUI 4006	31CD50
Replacement Sensor with Cord	BUI 4009	30NX23
Replacement Adhesive Tabs, Pkg. of 30	BUI 4010	30NX24