

Bolt & Cable Cutters

KENNEDY Replacement Jaws

Centre Cut Jaws
To efficiently cut high tensile materials by directing the force being applied into a small area. For use on non-ferrous rods and bars, mild steel bolts etc.



Low Tensile Bolt Cutters - Centre Cut

Drop forged hardened carbon steel jaws suitable for round and flat sections. With adjustable arms and cushion grips. Tubular handles for maximum strength combined with low weight.



Length (mm)	Capacity 15° HRC	Capacity 40° HRC	Order Code KEN-592	Price/1 THB
Low Tensile Cutters				
300 (12")	5mm	4mm	-3520K	1218.00
350 (14")	7mm	5mm	-3540K	1397.00
450 (18")	8mm	6mm	-3560K	1628.00
600 (24")	10mm	8mm	-3580K	2310.00
750 (30")	13mm	10mm	-3600K	3266.00
900 (36")	14mm	12mm	-3620K	4074.00

High Tensile Bolt Cutters

Drop forged hardened chrome vanadium steel. Ideal for cutting both flat and round section steels. Hardened carbon steel jaws. Tubular steel handles with cushion grip for maximum operator comfort. Conform to DIN 2076.



Cut Type	Overall Length (mm)	735N/mm ² (45 tons/in ²)	1570N/mm ² (100 tons/in ²)	Order Code KEN-592	Price/1 THB
Centre	600 (24")	9mm (11/32")	-	-2296K	7760.00
	760 (30")	13mm (1/2")	8mm (5/16")	-4200K	4190.00
	900 (36")	14mm (9/16")	9mm (3/8")	-4220K	8862.00
	1070 (42")	15mm (5/8")	10mm (3/8")	-2420K	18701.00

To Suit (mm)	Weight each	Order Code KEN-567	Price/1 THB
To Suit Low Tensile Cutters			
300 (12")	260g	-2920K	672.00
360 (14")	380g	-2940K	735.00
460 (18")	590g	-2960K	882.00
600 (24")	850g	-2980K	2216.00
760 (30")	1100g	-2990K	2415.00
900 (36")	2300g	-3000K	3591.00
To Suit High Tensile Cutters			
760 (30")	1500g	-3490K	5072.00
900 (36")	2300g	-3500K	5387.00
1070 (42")	3100g	-3510K	NA

Heavy Duty Cable Cutters

For use when cutting aluminium and copper cable, using a slicing action. Manufactured from forged steel with PVC dipped handles.


Capacity: 60mm².



Length (mm)	Weight each	Order Code KEN-558	Price/1 THB
250 (10")	516g	-8220K	764.00

Lever-Type Cable Cutter

These cable cutters have heat treated cutting edges and are designed to cut copper/ aluminium cables with minimal distortion. The soft grip handles are designed for user comfort whilst exerting force.

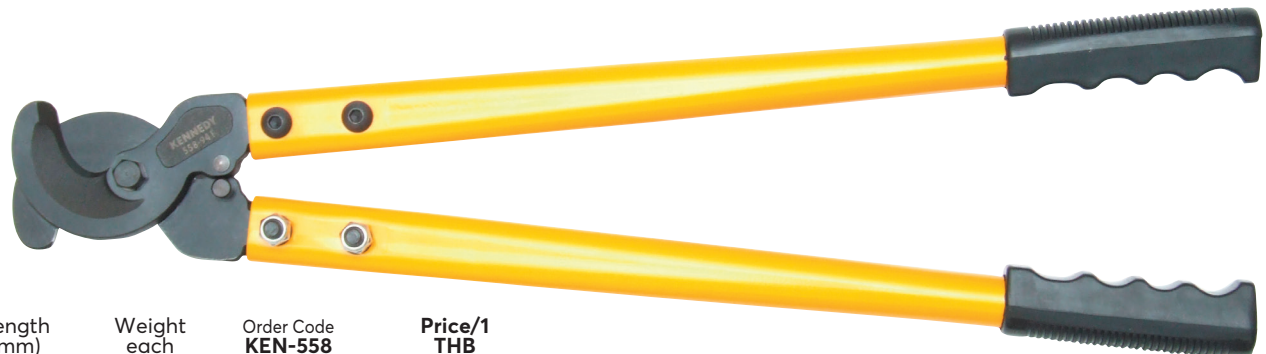

Cutting Capacity	Length (mm)	Weight each	Order Code KEN-558	Price/1 THB
18mm	380 (15")	3.4kg	-9400K	3539.00
25mm	550 (22")	3.4kg	-9410K	6720.00
40mm	820 (32")	3.4kg	-9420K	8526.00